


AEC-206 6-slot Full-Size Industrial Wallmount Chassis



New Product Available in Feb, 2003

- 1 Two Internal 3.5" Hard Drive Bay
- 2 5.25" CD-ROM Drive Floppy Drive
- 3 Floppy Drive
- 4 Two USB Ports
- 5 Power switch/LED, HDD LED, HDD LED, Reset Switch

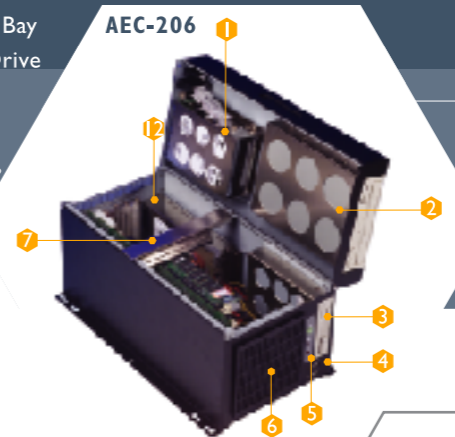


- 6 12cm Cooling Fan With Filter(flow-in)
- 7 Hold-down Bar
- 8 COM Port
- 9 Parallel Port
- 10 LVDS Interface
- 11 Hot-Air Outlet



UNIT:mm

DIMENSION

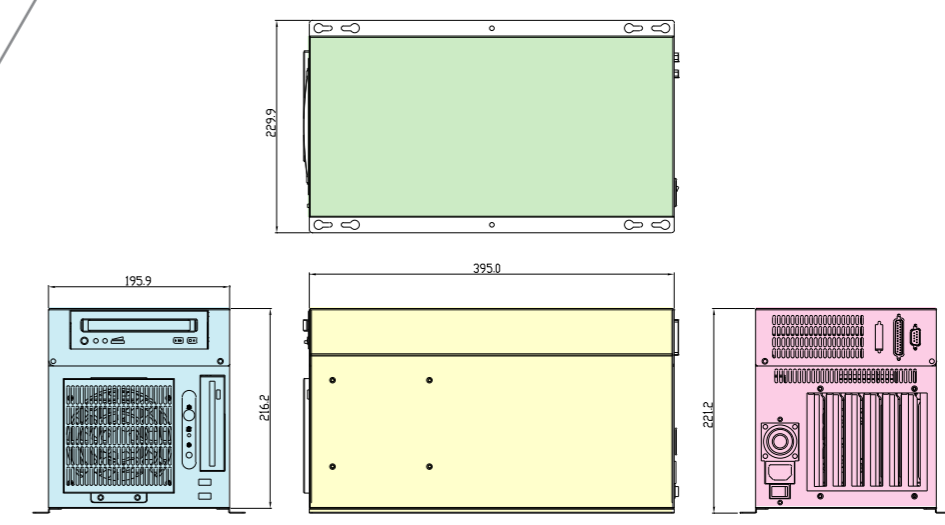

Features

- › Supports high performance Full-Size CPU cards
- › Supports 6-slot PICMG/ISA bus Passive Backplanes
- › Supports wall-mount or desktop applications
- › Supports one front access 5.25 CD-ROM and 3.5" FDD and two internal 3.5" HDD
- › One easy-to-replace ball bearing cooling fan with filter for card area
- › Supports one card hold-down bar
- › Special modular design allows users to maintain the system with minimum down time

Specifications

Construction :	Heavy-duty steel chassis
Disk drive bay :	External-one 3.5" FDD or 5.25" CD-ROM Internal-two 3.5" HDD
System cooling fan :	one 12 x 12 cm ball bearing fan with filter(Flow-in)
Controls :	Power ON/OFF switch, reset switch
Indicator :	HDD LED, Power ON LED
I/O Port:	one LVDS, one COM port, one parallel port, two USB on front panel
Power supply:	1U ATX, ATX12V and AT power
Dimensions (W x H x D):	9.05"X8.51"X15.55"(230mm x 216.2mm x 395mm)
Net Weight (Bare):	7.8 kg (17 lbs)
Color:	Black
Operating temperature:	32~113° F (0~45° C)
Storage temperature:	32~167° F (0~75° C)°
Operating humidity:	5~95%@40C, non-condensing
Storage humidity:	5~95%

Passive Backplane Options

Back-plane Model	Slots per Segment (PISA/PCI/ISA/PICMG)	Segment (System)
BP-206SI-V60	0/0/6/0	Single
BP-206SG-P3-V6I	0/4/1/2	Single

Power Supply Options

Model No.	Specifications				
	Watt	Type	L x W x H	Input	Output
I7572I5001	150W	AT	180 mm x 100 mm x 40.5 mm	I15/230V	5/12/5/-12
I7572I5002	150W	ATX	180 mm x 100 mm x 40.5 mm	I15/230V	3.3/5/12/-5/-12/5Vsb
I757220001	200W	ATX 12V	200 mm x 100 mm x 40.5 mm	I15/230V	3.3/5/12/-5/-12/5Vsb
I7572I5004	300W	ATX 12V	200 mm x 100 mm x 40.5 mm	I15/230V	3.3/5/12/-5/-12/5Vsb