

# 2U 6-Slot Industrial Rackmount Chassis



### Features

- > Space-saving 2U chassis, ideal building block for expending your system.
- > Supports 6-slot PICMG bus passive back-planes
- > Disk drive bay holds one 5.25" and one 3.5" disk drive in front, and three 3.5" disk drive inside the chassis.
- > Butterfly backplane design supports 4 slot PCI expansion.
- > Dual easy-to-replace ball bearing cooling fan with front-access filter for card area(2 x 8 cm, 42.5CFM/each)
- > Special modular design allows users to maintain the system with minimum down time

## Specifications

Construction: Heavy-duty steel chassis

Disk drive bay: External - one 3.5" FDD and 5.25" CD-ROM

Internal - three 3.5" HDD

System cooling fan: Dual easy-to-replace 42.5CFM/each (flow-in) ball bearing cooling fan with front-access

air fi**l**ter

Keyboard connector:One Pre-Wired 5-pin DIN connector on the front panelControls:Power ON/OFF switch, reset switch on front panelIndicator:Single-color LEDs for Power ON and HDD activity

Speaker: One 8-Ohm speaker

Color: black

Dimensions (WxHxD): 19" × 3.5" × 20.67" (482.6mm × 88mm × 526.1mm)


Carton size (LxWxH):  $690 \text{mm} \times 618 \text{mm} \times 267 \text{mm}$ 

Net weight (Bare): 10 kg (22 lbs)

Operating temperature:  $32 \sim 113^{\circ}F (0 \sim 45^{\circ}C)$ Storage temperature:  $32 \sim 167^{\circ}F (0 \sim 75^{\circ}C)$ 

Operating humidity:  $5 \sim 95\% \otimes 40^{\circ}\text{C}$ , non-condensing

Storage humidity:  $5 \sim 95\%$ 

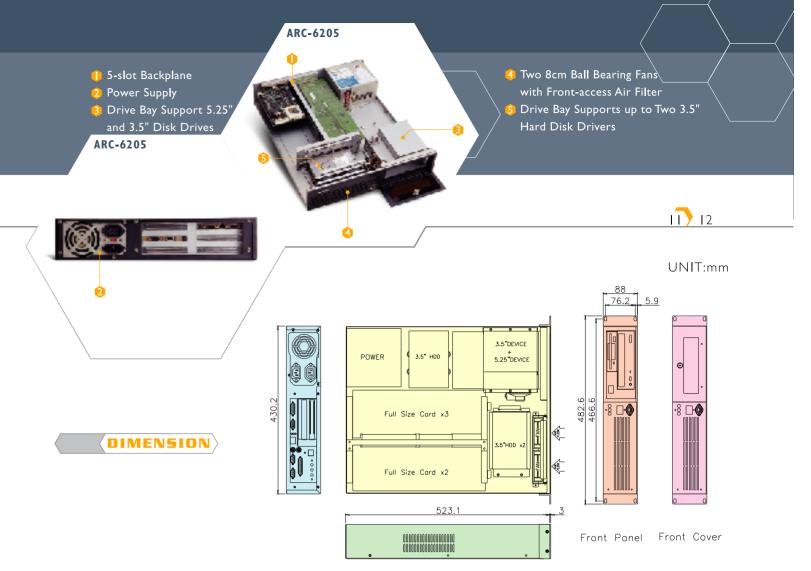

### **Passive Backplane Options**

Backplane	Slots per Segment (PISA/PCI/ISA/PICMG)	Segment (System)	
BP-206SG-P4-V00	0/4/1/1	Single	
BP-206SG-P2-VII	0/2/3/1	Single	

# **Power Supply Options**

Model No. Watt	Specifications				
	Type	LxWxH	Input	Output	
1757225002	250W	AT	140mm x 150mm x 86mm	115/230V	5/12/-5/-12
I757230008	300W	ATX	140mm x 150mm x 86mm	115/230V	3.3/5/12/-5/-12/5Vsb
1757240006	400W	ATX I2V	I40mm x I50mm x 86mm	115/230V	3.3/5/12/-5/-12/5Vsb