CE

EMC COMPLIANCE TEST REPORT

for

Industrial Display Monitor

Trade Name	**:**	N/A
Model Number	**:**	OPD-215ABT
Product Family	**:**	OPD-215ART; OPD-215AT
Serial Number	**:**	N/A
Report Number	**:**	02E0031-E
Date	**:**	April 01, 2002
Regulations	**:**	See below

Standards	Results (Pass/Fail)
EN 55022: 1998	PASS
EN 61000-3-2: 1995+A1: 1998+A2: 1998+A14: 2000	PASS
EN 61000-3-3: 1995	PASS
EN 55024: 1998	PASS
- IEC 61000-4-2: 1995 +A2: 2000	PASS
- IEC 61000-4-3: 1995	PASS
- IEC 61000-4-4: 1995	PASS
- IEC 61000-4-5: 1995	PASS
- IEC 61000-4-6: 1996	PASS
- IEC 61000-4-8: 1993	N/A
- IEC 61000-4-11: 1994	PASS

Prepared for：

AAEON Technology Inc.
5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City,
Taipei, Taiwan, R. O. C.

Prepared by：

C&C LABORATORY CO., LTD.
#B1, 1st Fl., Universal Center,
No. 183, Sec. 1, Tatung Rd., Hsi Chin,
Taipei Hsien, Taiwan, R.O.C.
TEL: (02)86422071
FAX: (02)86422256

CE

EC-Declaration of Conformity

For the following equipment:

Industrial Display Monitor

(Product Name)

OPD-215ABT; OPD-215ART; OPD-215AT

(Model Designation / Trade name)

AAEON Technology Inc.

(Manufacturer Name)

5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City, Taipei, Taiwan, R. O. C.

(Manufacturer Address)

is herewith confirmed to comply with the requirements set out in the Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility Directive (89/336/EEC, Amended by 92/31/EEC, 93/68/EEC & 98/13/EC), For the evaluation regarding the Electromagnetic Compatibility (89/336/EEC, Amended by 92/31/EEC & 93/68/EEC & 98/13/EC) the following standards are applied:

[*V*] EN 55022: 1998

[*V*] EN 61000-3-2: 1995+A1: 1998+A2: 1998+A14: 2000

[*V*] EN 61000-3-3: 1995

[*V*] EN55024: 1998

IEC 61000-4-2: 1995 +A2: 2000, IEC 61000-4-3: 1995, IEC 61000-4-4: 1995

IEC 61000-4-5: 1995, IEC 61000-4-6: 1996, IEC 61000-4-11: 1994

The following manufacturer / importer or authorized representative established within the EUT is responsible for this declaration:

(Company Name)

(Company Address)

Person responsible for making this declaration:

(Name, Surname)

(Position / Title)

(Place) (Date) (Legal Signature)

TABLE OF CONTENTS

VERIFICATION OF COMPLIANCE

Equipment Under Test:	Industrial Display Monitor
Trade Name:	N/A
Model Number:	OPD-215ABT
Product Family:	OPD-215ART; OPD-215AT
Serial Number:	N/A
Applicant:	**AAEON Technology Inc.** 5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City, Taipei, Taiwan, R. O. C.
Manufacturer:	**AAEON Technology Inc.** 5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City, Taipei, Taiwan, R. O. C.
Type of Test:	EMC Directive 89/336/EEC for CE Marking
Technical Standards:	EN 55022: 1998 EN 61000-3-2: 1995+A1: 1998+A2: 1998+A14: 2000 EN 61000-3-3: 1995 EN 55024: 1998 (IEC 61000-4-2: 1995 +A2: 2000, IEC 61000-4-3: 1995 IEC 61000-4-4: 1995, IEC 61000-4-5: 1995 IEC 61000-4-6: 1996, IEC 61000-4-11: 1994)
File Number:	02E0031-E
Date of test:	March 28, 2002 & March 29, 2002
Deviation:	N/A
Condition of Test Sample:	Normal

The above equipment was tested by C&C Laboratory Co., Ltd. for compliance with the requirements set forth in EMC Directive 89/336/EEC and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Approved by Authorized Signatory: Vince Chiang
for **RICK YEO / MANAGER**

GENERAL INFORMATION

Applicant:	**AAEON Technology Inc.** 5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City, Taipei, Taiwan, R. O. C.
Contact Person:	Milo Wang / Q. E. Dept. Engineer
Manufacturer:	**AAEON Technology Inc.** 5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien City, Taipei, Taiwan, R. O. C.
File Number:	02E0031-E
Date of Test:	March 28, 2002 & March 29, 2002
Equipment Under Test:	Industrial Display Monitor
Model Number:	OPD-215ABT
Product Family:	OPD-215ART; OPD-215AT
Serial Number:	N/A
Type of Test:	EMC Directive 89/336/EEC for CE Marking
Technical Standards:	EN 55022: 1998 EN 61000-3-2: 1995+A1: 1998+A2: 1998+A14: 2000 EN 61000-3-3: 1995 EN 55024: 1998 (IEC 61000-4-2: 1995 +A2: 2000, IEC 61000-4-3: 1995 IEC 61000-4-4: 1995, IEC 61000-4-5: 1995 IEC 61000-4-6: 1996, IEC 61000-4-11: 1994)
Frequency Range (EN 55022):	150kHz to 30MHz for Line Conducted Test 30MHz to 1000MHz for Radiated Emission Test
Test Site	**C&C LABORATORY CO., LTD.** No. 199, Chung Sheng Road, Hsin Tien City, Taipei Taiwan, R. O. C.

SYSTEM DESCRIPTION

EUT Test Procedure:

1. Windows 98 Boots System.
2. Run Winemc.Exe To Activate All Peripherals And Display “H” Pattern On Monitor Screen.
3. Play Hi-8 to Activate on Monitor.

PRODUCT INFORMATION

Housing Type:	Plastic w/ metal plate
EUT Power Rating:	DC 12V from AC Adaptor
AC power during Test:	230VAC, 50Hz to AC Adaptor
AC Adaptor Manufacturer:	EDAC
AC Adaptor Model Number:	EA1050A
AC Power Cord Type:	Unshielded, 1.8m (Detachable)
DC Power Cable Type:	Shielded, 1.2m (Non-Detachable, with a ferrite core)
EUT I/O Cable (DB 9):	Shielded, 1.8m (Detachable)
EUT I/O Cable (DB 15):	Shielded, 1.2m (Detachable , with two ferrite cores)
OSC/Clock Frequencies：	Y1= 24.533MHz; Y2= 14.3MHz; Y3= 12.0MHz
A/D Board Model:	MTC-ZU2
LCD Panel Brand / Model Number:	FUJITSU 15” / FLC38XGC6V-06

Model Difference:

Model Name	Differences	Tested (Checked)
OPD-215ABT	Original Model	☒
OPD-215ART	Additional Model (Case include the Rack)	☐
OPD-215AT	Additional Model (Without the Case)	☐

I/O Port of EUT:

I/O PORT TYPES	Q’ TY	TESTED WITH
1). Serial Port (DB 9)	1	1
2). VGA Port (DB15)	1	1
3). Video (RCA)	1	1
4). S-Video	1	1

Note: N/A

SUPPORT EQUIPMENT

No	Equipment	Model #	Serial #	FCC ID	Trade Name	Data Cable	Power Cord
1.	PS/2 Keyboard	6311-TA	N/A	DoC	ACER	Shielded, 1.7m	N/A
2.	PS/2 Mouse	M-S34	LZE12352345	DZL211029	LOGITECH	Shielded, 1.9m	N/A
3.	Printer	KX-P1080i	N/A	ACJ5Z6KX-P1080i	PANASONIC	Shielded, 1.7 m	Unshielded, 1.8m
4.	Host PC	CUSI-M	HS-25	DoC	VIVA	DB9: Shielded, 1.8m DB15: Shielded, 1.2m With two cores	Unshielded, 1.8m
5.	V8	SCH985	67CG300364	N/A	SAMSUNG	Unshielded, 1.5m x 2	Unshielded, 1.8m

Note: All the above equipment/cables were placed in worse case positions to maximize emission signals.

Grounding: Grounding was in accordance with the manufacturer' s requirements and conditions for the intended use.

TEST FACILITY

Location: No. 199, Chung Sheng Road, Hsin Tien City,
Taipei, Taiwan, R. O. C.

Description: There are two 3/10m open area test sites and one line conducted lab for final test.
The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 1992 and CISPR 22/EN 55022 requirements.

Site Filing: A site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.

Registration also was made with Voluntary Control Council for Interference (VCCI).

Site Accreditation: Accredited by A2LA (Certificate #: 824.01) for EMC.

Also accredited by BSMI for the product category of Information Technology Equipment.

Instrument Tolerance: All measuring equipment is in accord with ANSI C63.4 and CISPR 22 requirements that meet industry regulatory agency and accreditation agency requirement.

Ground Plane: Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna. It has no holes or gaps having longitudinal dimensions larger than one-tenth of a wavelength at the highest frequency of measurement up to 1GHz.

TEST EQUIPMENT LIST (EMISSION)

Instrumentation: The following list contains equipment used at C & C Laboratory, Co., Ltd. for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2-1988 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 9kHz to 1.0 / 2.0 GHz.

Equipment used during the tests:

Open Area Test Site: #E

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL. DUE
SPECTRUM ANALYZER	H.P.	8566B	2937A06102	06/06/01	06/05/02
SPECTRUM DISPLAY	H.P.	85662A	2848A18276	06/06/01	06/05/02
QUASI-PEAK DETECTOR	H.P.	85650A	2811A01439	06/07/01	06/06/02
AMPLIFIER	H.P.	8447D B	1644A02328	05/07/01	05/06/02
ANTENNA	EMCO	3142	1310	06/30/01	06/29/02
CABLE	BELDEN	9913	N-TYPE07	01/02/02	01/01/03

Conducted Emission Test Site: Conducted Room

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL. DUE
TEST RECEIVER	R&S	ESHS20	840455/006	03/16/02	03/15/03
LISN	SOLAR	8012-50-R-24-BNC	8305114	07/23/01	07/22/02
LISN(EUT)	EMCO	3825/2	1435	01/16/02	01/15/03

The calibrations of the measuring instruments, including any accessories that may effect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors applied in accordance with instructions contained in the manual for the measuring instrument.

TEST EQUIPMENT LIST

For Power Harmonic & Voltage Fluctuation/Flicker Measurement:

Manufacturer/Type	Model No.	Serial No.	Last Cal.	Cal. Due
HP / Harmonic & Flicker Tester	6842A	3531A-000142	06/15/2001	06/14/2002

For ESD test:

Manufacturer/Type	Model No.	Serial No.	Last Cal.	Cal. Due
Schaffner / ESD Simulator	NSG 432	2029	02/06/2002	02/05/2003

For Radiated Electromagnetic Field immunity Measurement:

Manufacturer/Type	Model No.	Serial No.	Last Cal.	Cal. Due
R&S / Signal Generator	SMY 02	DE13751	01/10/2002	01/09/2003
IFI / "E" Field sensor/ Light Modulator Transmitter	EFS-5	713-0695	06/29/2001	06/28/2002
IFI / Combination Amplifier	SMX100	2067-1196	06/28/2001	06/27/2002
IFI / Leveling Pre-Amplifier	LPA-5B	714-0695	05/01/2001	04/30/2002
EMCO / Biconilog Antenna	3142	9609-1087	No Calibration Required	No Calibration Required

For Fast Transients/Burst test:

Manufacturer/Type	Model No.	Serial No.	Last Cal.	Cal. Due
KeyTek Instruments / EFT Generator	E421	9502326	11/01/2001	10/31/2002
KeyTek Instruments / Capacitive Clamp	CCL-4	9503290	No Calibration Required	No Calibration Required
HAEFELY TRENCH / Fast Transients/Burst Generator	PEFT- JUNIOR	583 333-117	08/21/2001	08/20/2002
HAEFELY TRENCH / Clamp	093 506.1	080 421.13	N/A	N/A

For Surge Immunity test:

Manufacturer/Type	Model No.	Serial No.	Last Cal.	Cal. Due
Surger Generator KeyTek Instruments	E501	9502324	11/01/2001	10/31/2002
Telecom Lines Coupler DECOUPLER KeyTek Instruments	CM-TELCD	0104399	05/01/2001	04/30/2002
I/O Signal Line DECOUPLER KeyTek Instruments	CM-I/OCD	0103234	05/01/2001	04/30/2002
HAEFELY TRENCH / Surge Tester	PSUGER 4010	583 334-71	09/01/2001	08/31/2002

For CS test:

Manufacturer/Type	Model No.	Serial No.	Last Cal.	Cal. Due
R&S / Signal Generator	SMY 02	DE13751	01/10/2002	01/09/2003
IFI / Combination Amplifier	SMX100	2067-1196	06/28/2001	06/27/2002
IFI / Leveling Pre-Amplifier	LPA-5B	714-0695	05/01/2001	04/30/2002
FISCHER / Power Line Coupling Decoupling Network	FCC-801-M3-16A	99122	10/27/2001	10/26/2002
FISCHER / Bulk Current Injection Probe	F-120-9B	54	10/30/2001	10/29/2002
Narda / High Power Attenuator	769-6	02541	10/26/2001	10/25/2002

For Power Frequency Magnetic Field test :

Manufacturer/Type	Model No.	Serial No.	Last Cal.	Cal. Due
Haefely / Magic Field Tester	MAG 100.1	081436-02	No Calibration Required	No Calibration Required
Extech Electronics / Frequency Converter	CFC-105	810390	No Calibration Required	No Calibration Required
CHY/ AC/DC Clamp Meter	932C	2K0900285	10/25/2001	10/24/2002

For Voltage Dips/Short Interruption and Voltage Variation Immunity test:

Manufacturer/Type	Model No.	Serial No.	Last Cal.	Cal. Due
Haefely / Dips/Inerruption/Variations Tester	PLINE 1610	081568-06	08/06/2001	08/05/2002
FLUKE / 79 Series Ii Multimeter	79-II	66400868	07/03/2001	07/02/2002

SECTION 1 EN 55022 (LINE CONDUCTED & RADIATED EMISSION)

MEASUREMENT PROCEDURE
(PRELIMINARY LINE CONDUCTED EMISSION TEST)

1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per EN 55022 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2) Support equipment, if needed, was placed as per EN 55022.
3) All I/O cables were positioned to simulate typical actual usage as per EN 55022.
4) The EUT received DC 12V power through AC Adaptor and Line Impedance Stabilization Network (LISN) which supplied power source of 230VAC/ 50Hz and was grounded to the ground plane.
5) All support equipment received power from a second LISN supplying power of 110VAC/60Hz, if any.
6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7) Analyzer / Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.
8) During the above scans, the emissions were maximized by cable manipulation.
9) The following test mode were scanned during the preliminary test:

Mode(s):

No.	Mode of operation	Date	Data Report/Plot No.
1	**1024X768**	**03/29/2002**	**0031C#(08, 16)** **0031C#(65, 66)**
2	**800X600**	**03/29/2002**	**0031C#(24)**
3	**640X480**	**03/29/2002**	**0031C#(32)**
4	**RCA**	**03/29/2002**	**0031C#(40)**
5	**S-VIDEO**	**03/29/2002**	**0031C#(48)**

10) After the preliminary scan, we found the following test mode producing the highest emission level.

Mode: 1. (Test Data: 0031C# 65, 66 ; Test Date: 03/29/2002)

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

MEASUREMENT PROCEDURE
(FINAL LINE CONDUCTED EMISSION TEST)

1) EUT and support equipment was set up on the test bench as per step 10 of the preliminary test.

2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Q.P. mode, then the emission signal was re-checked using an A.V. detector.

3) The test data of the worst case condition(s) was reported on the Summary Data page.

Data Sample:

Freq (MHz)	Meter Reading (dBuV)	C.F. (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Margin (dB)	Reading Type (P/Q/A)	Line (L1/L2)
x.xx	**x.xx**	**x.xx**	**48.38**	**66.00**	**-17.62**	**A**	**L1**

C.F.(Correction Factor)=Insertion Loss + Cable Loss
Corrected Reading = Metering Reading + C.F.
Margin=Corrected Reading - Limits

P=Peak Reading L1=Hot
Q=Quasi-peak L2=Neutral
A=Average Reading

Comments: **N/A**

LINE CONDUCTED EMISSION LIMIT (EN 55022)

Frequency	Maximum RF Line Voltage	
	Q.P.	AVERAGE
150kHz-500kHz	79dBuV	66dBuV
500kHz-5MHz	73dBuV	60dBuV
5MHz-30MHz	73dBuV	60dBuV

Note: The lower limit shall apply at the transition frequency.

MEASUREMENT PROCEDURE
(COMMON MODE CONDUCTED EMISSION MEASUREMENT)

1) Selecting ISN for unscreened cable or a current probe for screened cable to take measurement.

2) The port of the EUT was connected to the remote side support equipment through the ISN/Current Probe and communication in normal condition.

3) Making a overall range scan by using the test receiver controlled by controller and record at least six highest emissions for showing in the test report.

4) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

5) In case of measuring on the screened cable, the current limit shall be applied, otherwise the voltage limit should be applied.

6) The following test mode(s) were scanned during the preliminary test:
Mode: N/A (EUT no any Telecommunicate Port)

7) After the preliminary scan, we found the following test mode(s) producing the highest emission level and test date of the worst case was reported on the summary data page.
Mode: N/A

Data Sample:

Freq (MHz)	Meter Reading (dBuV)	C.F. (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reading Type (P/Q/A)
x.xx	**x.xx**	**x.xx**	**59.26**	**74.00**	**-14.74**	**P**

C.F.(Correction Factor)=Insertion Loss (9.5dB) + Cable Loss
Corrected Reading = Metering Reading + C.F.
Margin=Corrected Reading - Limits
P=Peak Reading Q=Quasi-peak A=Average Reading

Comments: **N/A**

COMMON MODE CONDUCTED EMISSION LIMIT AT TELECOMMUNICATION PORTS

☐ CE-Mark (EN 55022:1998)

CLASS	Measuring Band	Voltage limit dB(uV)		Current limit dB(uA)	
		Q.P.	AV	Q.P.	AV
B	150kHz-500kHz	84-74	74-64	40-30	30-20
	500kHz-30MHz	74	64	30	20

Note: The lower limit shall apply at the transition frequency.

MEASUREMENT PROCEDURE
(PRELIMINARY RADIATED EMISSION TEST)

1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per EN 55022 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

2) Support equipment, if needed, was placed as per EN 55022.

3) All I/O cables were positioned to simulate typical actual usage as per EN 55022.

4) The EUT received DC 12V power source from AC Adaptor (AC 230V/50Hz) to the outlet socket under the turntable. All support equipment received 110VAC/60Hz power from another socket under the turntable, if any.

5) The antenna was placed at 10 meter away from the EUT as stated in EN 55022. The antenna connected to the analyzer via a cable and at times a pre-amplifier would be used.

6) The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

7) The following test mode were scanned during the preliminary test:

Mode(s):

No.	Mode of operation	Date	Data Report/Plot No.
1	**1024X768**	**03/28/2002**	**0031B#(02, 04, 06, 08)**
2	**800X600**	**03/28/2002** **03/29/2002**	**0031B#(10, 12, 14, 16)** **0031E#(02, 03)**
3	**640X480**	**03/28/2002**	**0031B#(18, 20, 22, 24)**
4	**RCA**	**03/28/2002**	**0031B#(34, 36, 28, 40)**
5	**S-VIDEO**	**03/28/2002**	**0031B#(26, 28, 30, 32)**

8) After the preliminary scan, we found the following test mode producing the highest emission level.

Mode: 2. (Test Data: 0031E# 02, 03 ; Test Date: 03/29/2002)

Then, the EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for final testing.

MEASUREMENT PROCEDURE
(FINAL RADIATED EMISSION TEST)

1) EUT and support equipment were set up on the turntable as per step 8 of the preliminary test.

2) The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

3) Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Peak reading is presented. If EUT emission level was less-2dB to the limit, then the emission signal was re-checked using a Q.P. detector.

4) The test data of the worst case condition(s) was reported on the Summary Data page.

Data Sample:

Freq (MHz)	Meter Reading (dBuV)	C.F. (dB/m)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reading Type P/Q/A	Pol. H/V
x.xx	**x.xx**	**x.xx**	**40.82**	**47.00**	**-6.18**	**P**	**V**

C.F.(Correction Factor)=Antenna Factor + Cable Loss + Attenuator(6dB) - Amplifier Gain
Corrected Reading = Metering Reading + C.F.
Margin=Corrected Reading – Limits

P=Peak Reading
Q=Quasi-peak
A=Average Reading
H=Horizontal Polarization/Antenna
V=Vertical Polarization/Antenna

Comments: **N/A**

RADIATED EMISSION LIMIT

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBu V/m/ Q.P.)
30-230	10	40
230-1000	10	47

Note: The lower limit shall apply at the transition frequency.

BLOCK DIAGRAM OF TEST SETUP

System Diagram of Connections between EUT and Simulators

EUT: Industrial Display Monitor

Trade Name: N/A

Model Number: OPD-215ABT

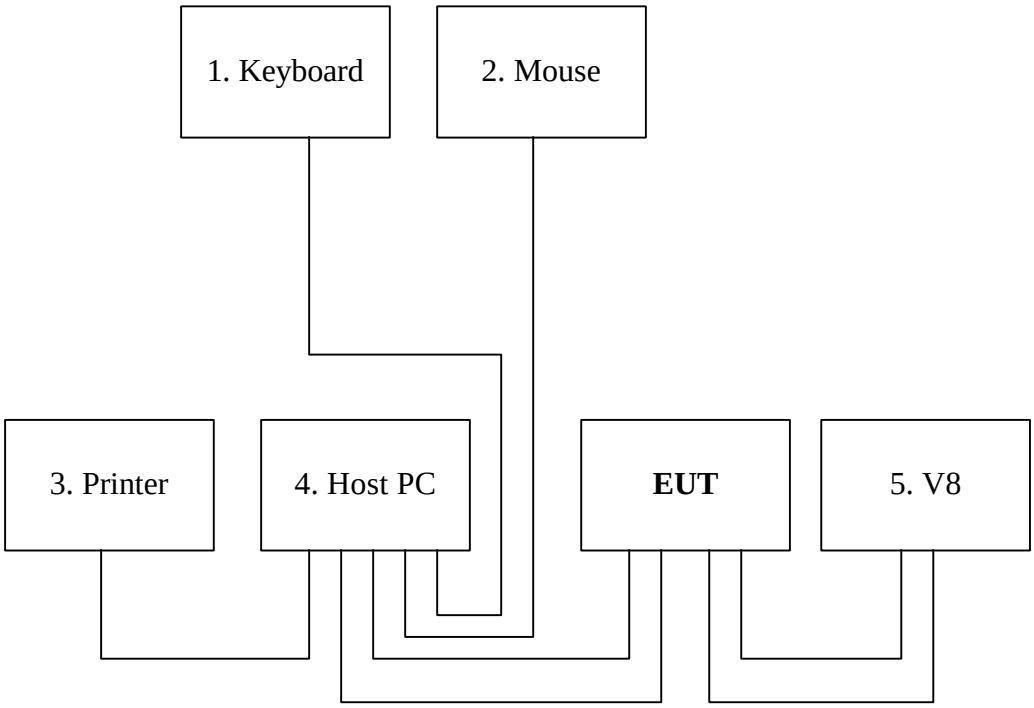

SUMMARY DATA
(LINE CONDUCTED TEST)

Model Number: OPD-215ABT **Location:** Conducted Room

Tested by: Cliff Lai

Test Mode: Mode 1

Test Results: Passed

Temperature: 22℃ **Humidity:** 83%RH

(The chart below shows the highest readings taken from the final data)

Frequency Range Investigated				150 kHz TO 30 MHz			
Freq (MHz)	Meter Reading (dBuV)	C.F. (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Margin (dB)	Reading Type (P/Q/A)	Line (L1/L2)
1.689	**46.83**	**0.12**	**46.95**	**73.00**	**-26.05**	**P**	**L1**
2.088	**49.22**	**0.14**	**49.35**	**73.00**	**-23.65**	**P**	**L1**
2.474	**52.51**	**0.16**	**52.67**	**73.00**	**-20.33**	**P**	**L1**
1.689	**46.23**	**0.12**	**46.35**	**73.00**	**-26.65**	**P**	**L2**
2.088	**48.42**	**0.14**	**48.55**	**73.00**	**-24.45**	**P**	**L2**
2.409	**53.43**	**0.15**	**53.58**	**73.00**	**-19.42**	**P**	**L2**

C.F.(Correction Factor)=Insertion Loss + Cable Loss
Corrected Reading = Metering Reading + C.F.
Margin=Corrected Reading - Limits

P=Peak Reading L1=Hot
Q=Quasi-peak L2=Neutral
A=Average Reading

Comments: **N/A**

SUMMARY DATA
(RADIATED EMISSION TEST)

Model Number: OPD-215ABT

Location: Site # E

Tested by: Cliff Lai

Polar: Vertical / Horizontal– 10m

Test Mode: Mode 2

Test Results: Passed

Temperature: 22℃

Humidity: 83%RH

(The chart below shows the highest readings taken from the final data)

Frequency Range Investigated (30 MHz TO 1000 MHz)							
Freq (MHz)	Meter Reading (dBuV)	C.F. (dB/m)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reading Type P/Q/A	Pol. H/V
222.034	**47.90**	**-10.14**	**37.76**	**40.00**	**-2.24**	**Q**	**V**
281.490	**47.80**	**-7.46**	**40.34**	**47.00**	**-6.66**	**P**	**V**
295.910	**47.20**	**-7.24**	**39.96**	**47.00**	**-7.04**	**P**	**V**
443.910	**44.40**	**-3.88**	**40.52**	**47.00**	**-6.48**	**P**	**V**
554.910	**42.00**	**-1.69**	**40.31**	**47.00**	**-6.69**	**P**	**V**
151.880	**50.60**	**-14.50**	**36.10**	**40.00**	**-3.90**	**P**	**H**

C.F.(Correction Factor)=Antenna Factor + Cable Loss - Amplifier Gain (+ Attenuator 3dB)
Corrected Reading = Metering Reading + C.F.
Margin=Corrected Reading - Limits
P=Peak Reading H=Horizontal Polarization/Antenna
Q=Quasi-peak V=Vertical Polarization/Antenna
A=Average Reading

Comments: **N/A**

SECTION 2 EN 61000-3-2 & EN 61000-3-3 (POWER HARMONICS & VOLTAGE FLUCTUATION / FLICKER)

POWER HARMONICS MEASUREMENT

Port : AC mains
Basic Standard : EN 61000-3-2 (1995+A1: 1998+A2: 1998 + A14: 2000)
Limits : ☐ Class A, ☑ Class D
Temperature : 20^0C
Humidity : 70%
Test By : David Hung

VOLTAGE FLUCTUATION/FLICKER MEASUREMENT

Port : AC mains
Basic Standard : EN 61000-3-3 (1995)
Limits : § 5 of EN 61000-3-3
Temperature : 20^0C
Humidity : 70%
Test By : Stanley Huang

Block Diagram of Test Setup:

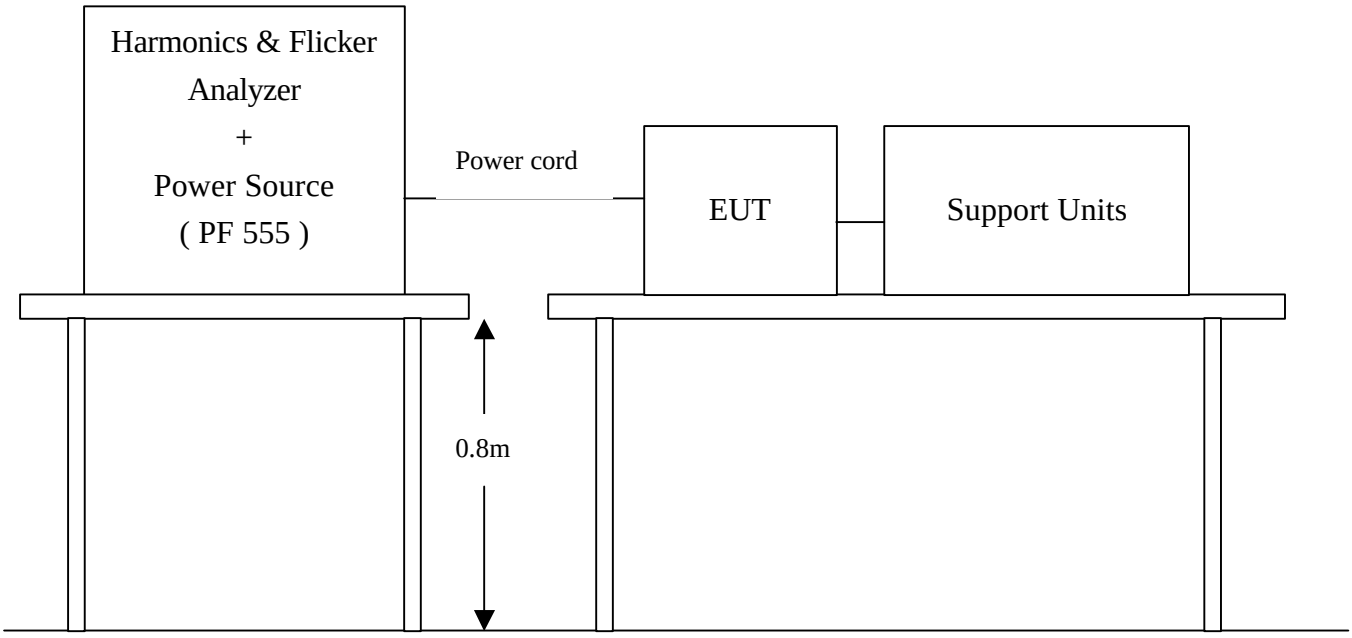

Result:

Please see the attached test data.

Approved by: Vivek Chiang

Signature: David Hung Date: 3/29/02.

Final Test Result: PASS

Settings and Test Conditions Compliant to the Standard: Yes

Test Equipment Used:

Agilent 6842A Harmonic/Flicker Test System with serial number:
HFTS Software Version: A.05.03
Date Last Calibrated:

Test Equipment Settings:

Line Voltage: 230.00 V	Current Measurement Range: High
Line Frequency: 50 Hz	Measurement Window Type: Rectangular
Device Class: D	Measurement Delay: 10 seconds
RMS Current Limit: 13.1 A	Quasi-stationary Test Duration: 30.00 minutes
Peak Current Limit: 80.8 A	Class Determination Pre-test Duration: 10.00 seconds
Number of Records: 5625	

Overrides:

Test Limit Source (Power Measurements/Statistics): Maximum
Power Overrides: None
Test Limit Overrides: None

Pre-test Results for Class Determination:

Percent in Envelope: 100.0%	Voltage THD Out-of-Specification?: No
Class D Equipment?: Yes	Fundamental Current: 0.136 A

RMS Voltage: 229.8 V	RMS Current: 0.3 A	Real Power: 30.0 W
Frequency: 50.0 Hz	Peak Current: 1.5 A	Apparent Power: 73.6 VA
Voltage THD: 0.03%	Current THD: 90.41%	Power Factor: 0.408
Maximum Power: 30.0 W	Mean Power: 29.9 W	

Active Power Statistics:

100th Percentile: 30.0 W	99th Percentile: 30.0 W	95th Percentile: 30.0
90th Percentile: 30.0 W	50th Percentile: 30.0 W	

Total Number of Failures:	Total Number of Errors:
None	None

Pre-Test Source Voltage Harmonics Data:

Harmonic Number	Limit (%)	Limit (Volts)	Max (%)	Max (Volts)
Fund.			100.0	229.855
2	0.20	0.460	0.006	0.014
3	0.90	2.069	0.006	0.014
4	0.20	0.460	0.004	0.010
5	0.40	0.919	0.010	0.022
6	0.20	0.460	0.003	0.006
7	0.30	0.690	0.006	0.014
8	0.20	0.460	0.001	0.003
9	0.20	0.460	0.010	0.023
10	0.20	0.460	0.003	0.008
11	0.10	0.230	0.009	0.021
12	0.10	0.230	0.003	0.007
13	0.10	0.230	0.010	0.022
14	0.10	0.230	0.001	0.003
15	0.10	0.230	0.007	0.016
16	0.10	0.230	0.002	0.004
17	0.10	0.230	0.011	0.026
18	0.10	0.230	0.003	0.006
19	0.10	0.230	0.010	0.022
20	0.10	0.230	0.002	0.005
21	0.10	0.230	0.010	0.022
22	0.10	0.230	0.004	0.009
23	0.10	0.230	0.007	0.015
24	0.10	0.230	0.002	0.005
25	0.10	0.230	0.005	0.011
26	0.10	0.230	0.001	0.003
27	0.10	0.230	0.003	0.006
28	0.10	0.230	0.001	0.002
29	0.10	0.230	0.005	0.011
30	0.10	0.230	0.001	0.003
31	0.10	0.230	0.002	0.004
32	0.10	0.230	0.001	0.002
33	0.10	0.230	0.001	0.003
34	0.10	0.230	0.001	0.002
35	0.10	0.230	0.003	0.008
36	0.10	0.230	0.001	0.003
37	0.10	0.230	0.004	0.009
38	0.10	0.230	0.002	0.004
39	0.10	0.230	0.005	0.011
40	0.10	0.230	0.001	0.001

Final Test Data:

Harmonic Number	Standard Limit (A rms)	Maximum Value (A rms)	Maximum Value (% Limit)	Mean Value (A rms)	Mean Value (% Limit)	Standard Deviation (A rms)	Standard Deviation (% Limit)	Pass (P) or Fail (F)
Fund.		0.1358		0.1331		0.0011		
2		0.0039		0.0033		0.0002		
3	2.3000	0.1258	5.5	0.1232	5.4	0.0010	0.0	P
4		0.0020		0.0016		0.0001		
5	1.1400	0.1199	10.5	0.1178	10.3	0.0008	0.1	P
6		0.0012		0.0008		0.0001		
7	0.7700	0.1129	14.7	0.1115	14.5	0.0005	0.1	P
8		0.0012		0.0007		0.0001		
9	0.4000	0.1050	26.2	0.1044	26.1	0.0001	0.0	P
10		0.0012		0.0007		0.0002		
11	0.3300	0.0968	29.3	0.0960	29.1	0.0004	0.1	P
12		0.0010		0.0004		0.0002		
13	0.2100	0.0874	41.6	0.0861	41.0	0.0008	0.4	P
14		0.0009		0.0003		0.0002		
15	0.1500	0.0772	51.5	0.0753	50.2	0.0012	0.8	P
16		0.0009		0.0004		0.0002		
17	0.1324	0.0667	50.4	0.0643	48.6	0.0015	1.2	P
18		0.0009		0.0004		0.0002		
19	0.1184	0.0563	47.5	0.0535	45.2	0.0018	1.6	P
20		0.0008		0.0003		0.0002		
21	0.1071	0.0461	43.0	0.0431	40.2	0.0021	1.9	P
22		0.0007		0.0003		0.0001		
23	0.0978	0.0364	37.2	0.0333	34.0	0.0021	2.2	P
24		0.0006		0.0003		0.0001		
25	0.0900	0.0277	30.8	0.0246	27.3	0.0021	2.3	P
26		0.0007		0.0003		0.0001		
27	0.0833	0.0201	24.1	0.0173	20.8	0.0018	2.2	P
28		0.0006		0.0003		0.0001		
29	0.0776	0.0140	18.1	0.0119	15.4	0.0013	1.7	P
30		0.0007		0.0003		0.0002		
31	0.0726	0.0099	13.7	0.0090	12.4	0.0004	0.6	P
32		0.0007		0.0003		0.0002		
33	0.0682	0.0095	13.9	0.0084	12.3	0.0004	0.5	P
34		0.0008		0.0003		0.0002		
35	0.0643	0.0104	16.2	0.0090	14.0	0.0006	0.9	P
36		0.0007		0.0003		0.0002		
37	0.0608	0.0107	17.6	0.0096	15.8	0.0005	0.8	P
38		0.0008		0.0003		0.0002		
39	0.0577	0.0105	18.2	0.0098	16.9	0.0003	0.5	P
40		0.0007		0.0003		0.0001		

Final Test Statistics:

Harmonic Number	Standard Limit (A rms)	Maximum Value (A rms)	Maximum Value (% Limit)	>50% of Limit (Count)	>75% of Limit (Count)	>90% of Limit (Count)	>95% of Limit (Count)	>100% of Limit (Count)	Pass(P) or Fail(F)
Fund.		0.1358							
2		0.0039		0	0	0	0	0	
3	2.3000	0.1258	5.5	0	0	0	0	0	P
4		0.0020		0	0	0	0	0	
5	1.1400	0.1199	10.5	0	0	0	0	0	P
6		0.0012		0	0	0	0	0	
7	0.7700	0.1129	14.7	0	0	0	0	0	P
8		0.0012		0	0	0	0	0	
9	0.4000	0.1050	26.2	0	0	0	0	0	P
10		0.0012		0	0	0	0	0	
11	0.3300	0.0968	29.3	0	0	0	0	0	P
12		0.0010		0	0	0	0	0	
13	0.2100	0.0874	41.6	0	0	0	0	0	P
14		0.0009		0	0	0	0	0	
15	0.1500	0.0772	51.5	3582	0	0	0	0	P
16		0.0009		0	0	0	0	0	
17	0.1324	0.0667	50.4	456	0	0	0	0	P
18		0.0009		0	0	0	0	0	
19	0.1184	0.0563	47.5	0	0	0	0	0	P
20		0.0008		0	0	0	0	0	
21	0.1071	0.0461	43.0	0	0	0	0	0	P
22		0.0007		0	0	0	0	0	
23	0.0978	0.0364	37.2	0	0	0	0	0	P
24		0.0006		0	0	0	0	0	
25	0.0900	0.0277	30.8	0	0	0	0	0	P
26		0.0007		0	0	0	0	0	
27	0.0833	0.0201	24.1	0	0	0	0	0	P
28		0.0006		0	0	0	0	0	
29	0.0776	0.0140	18.1	0	0	0	0	0	P
30		0.0007		0	0	0	0	0	
31	0.0726	0.0099	13.7	0	0	0	0	0	P
32		0.0007		0	0	0	0	0	
33	0.0682	0.0095	13.9	0	0	0	0	0	P
34		0.0008		0	0	0	0	0	
35	0.0643	0.0104	16.2	0	0	0	0	0	P
36		0.0007		0	0	0	0	0	
37	0.0608	0.0107	17.6	0	0	0	0	0	P
38		0.0008		0	0	0	0	0	
39	0.0577	0.0105	18.2	0	0	0	0	0	P
40		0.0007		0	0	0	0	0	

Remarks

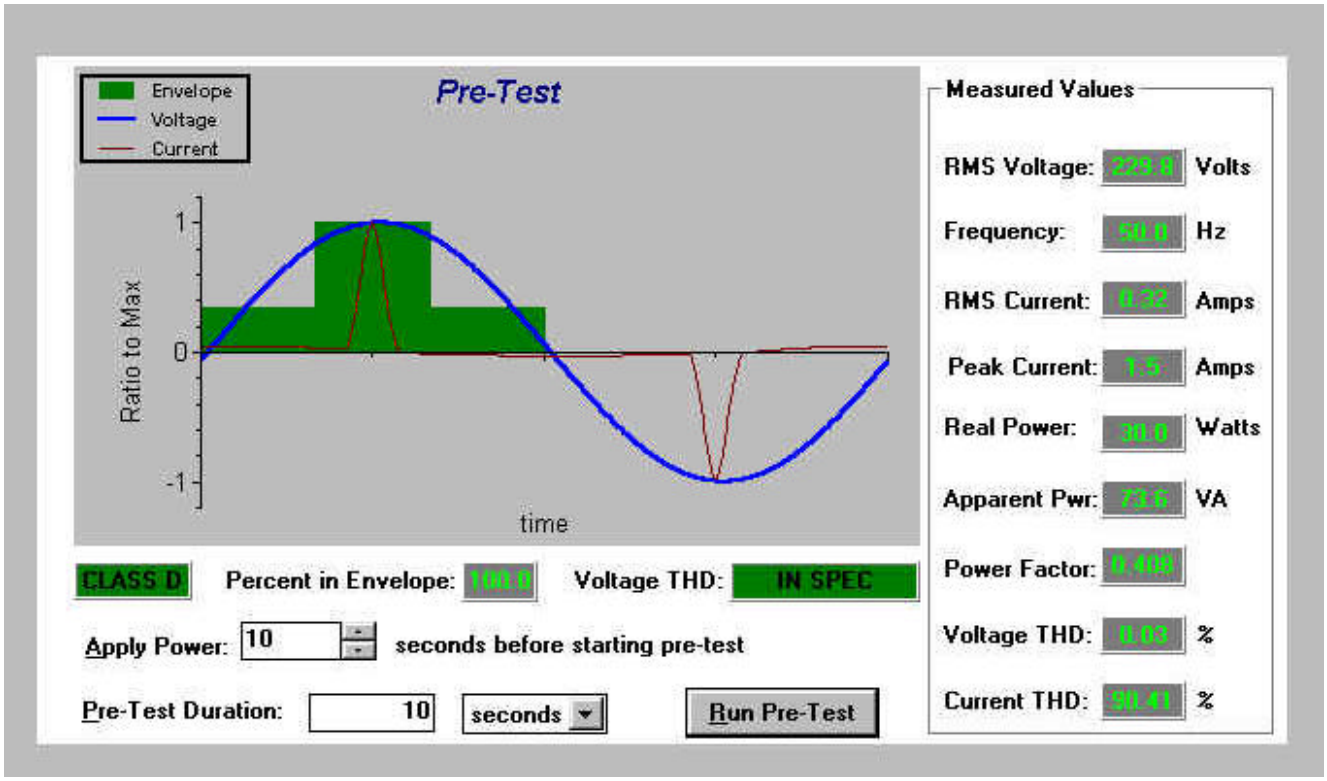
Envelope
Voltage
Current
Pre-Test
Ratio to Max
1
0
-1
time
CLASS D
Percent in Envelope:
Voltage THD:
IN SPEC
Apply Power:
10
seconds before starting pre-test
Pre-Test Duration:
10
seconds
Run Pre-Test
Measured Values
RMS Voltage:
Volts
Frequency:
Hz
RMS Current:
Amps
Peak Current:
Amps
Real Power:
Watts
Apparent Pwr:
VA
Power Factor:
Voltage THD:
%
Current THD:
%

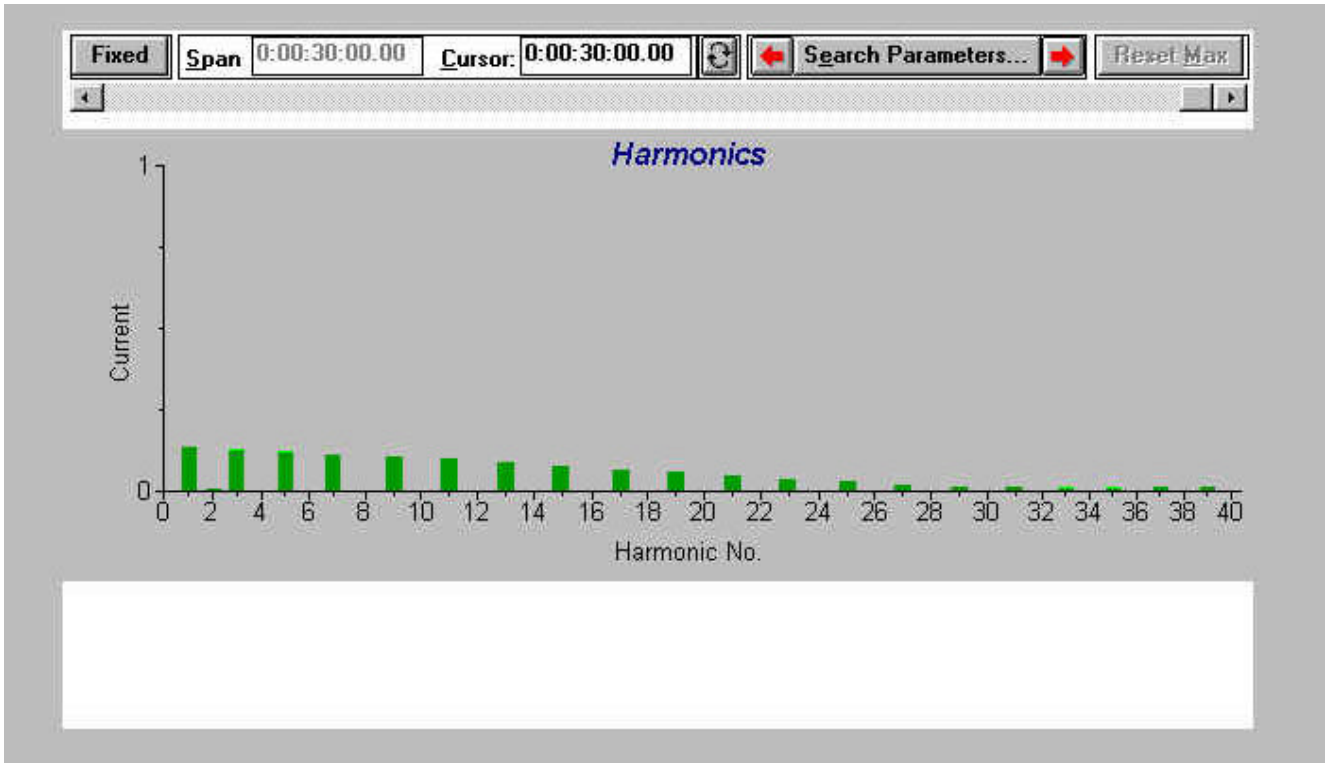
Fixed
Span 0:00:30:00.00
Cursor: 0:00:30:00.00
Search Parameters...
Reset Max
Harmonics
Current
1
0
0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40
Harmonic No.

Approved by: Vince Chiang
Signature: Stanley Hwang Date: 2002.3.29

Final Test Result: PASS

Settings and Test Conditions Compliant to the Standard: Yes

Test Equipment Used:

Agilent 6842A Harmonic/Flicker Test System with serial number:
HPTS Software Version: A.05.03
Date Last Calibrated:

Test Equipment Settings:

Line Voltage: 230.00 V	Pst Integration Time: 10 minutes
Line Frequency: 50 Hz	Pst Integration Periods: 3
Measurement Delay: 10.0 seconds	Test Duration: 00:30:00
RMS Current Limit: 13.1 A	Peak Current Limit: 80.8 A

Overrides:

Pst/Plt Test Limit Overrides: None
RMS Test Limit Overrides: None

Equipment Under Test Pre-test Results:

RMS Voltage: 229.8 V	RMS Current: 0.3 A	Real Power: 28.8 W
Frequency: 50.0 Hz	Peak Current: 1.6 A	Apparent Power: 74.0 VA
Voltage THD: 0.03%	Current THD: 91.22%	Power Factor: 0.389

Total Number of Failures:		Total Number of Errors:
Pst: 0	Dc: 0	None
Plt: 0	Dmax: 0	
	Dt: 0	

Final Test Summary:

Dmax:	0.0	Pst:	0.07	P_0.1:	0.01
Dc:	0.0	Plt:	0.07	P_1s:	0.01
Dt:	0.00	Plt Threshold:	0.65	P_3s:	0.01
				P_10s:	0.01
				P_50s:	0.01

Final Test Data by Integration Period:

Number of Integration Periods: 3

Integration Periods	Pst (P.U.)	P_0.1 (P.U.)	P_1.0s (P.U.)	P_3.0s (P.U.)	P_10s (P.U.)	P_50s (P.U.)	Dc (%)	Dmax (%)	Dt (seconds)	Pass(P) or Fail(F)
1	0.07	0.01	0.01	0.01	0.01	0.01	-----	-----	--------	N/A
2	0.07	0.01	0.01	0.01	0.01	0.01	-----	-----	--------	N/A
3	0.07	0.01	0.01	0.01	0.01	0.01	-----	-----	--------	N/A

Remarks

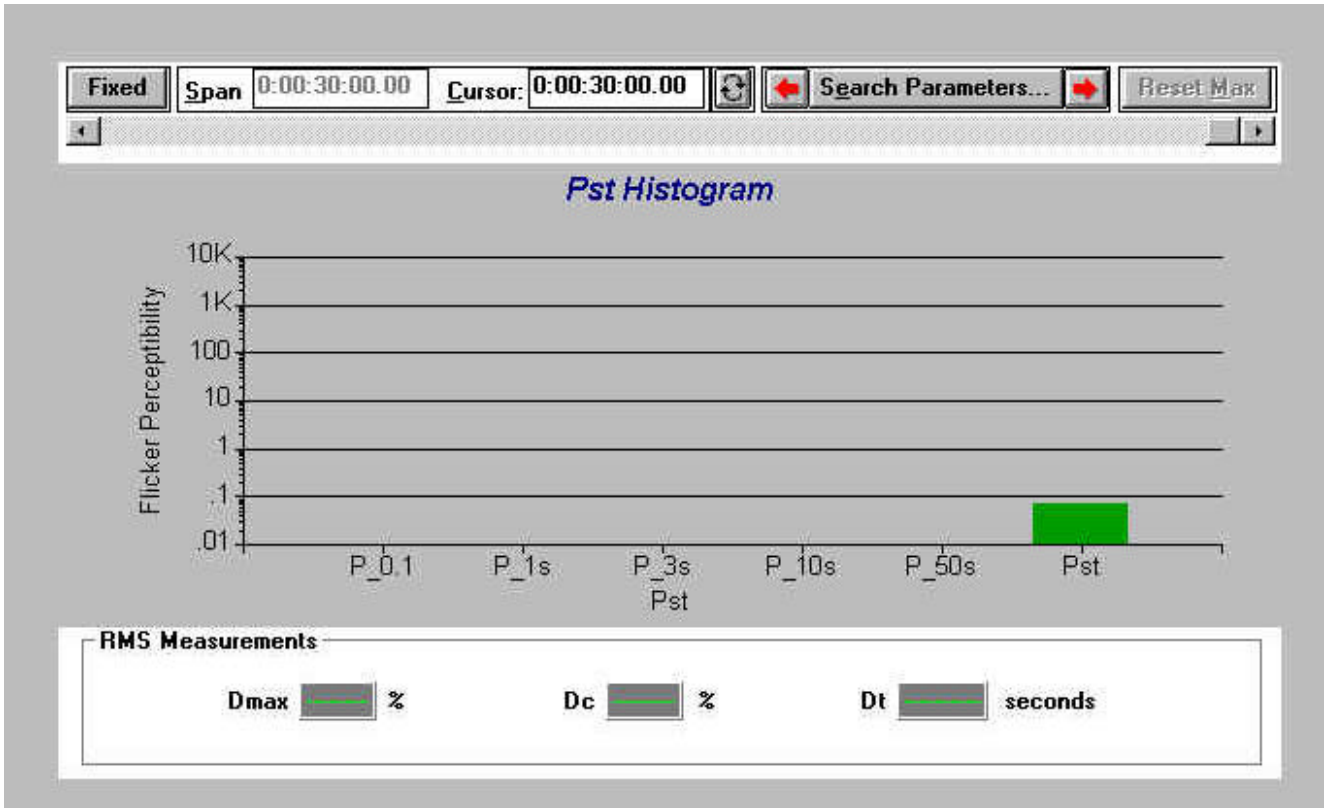
Fixed
Span 0:00:30:00.00
Cursor: 0:00:30:00.00
Search Parameters...
Reset Max
Pst Histogram
Flicker Perceptibility
10K
1K
100
10
1
.1
.01
P_0.1
P_1s
P_3s
P_10s
P_50s
Pst
Pst
RMS Measurements
Dmax %
Dc %
Dt seconds

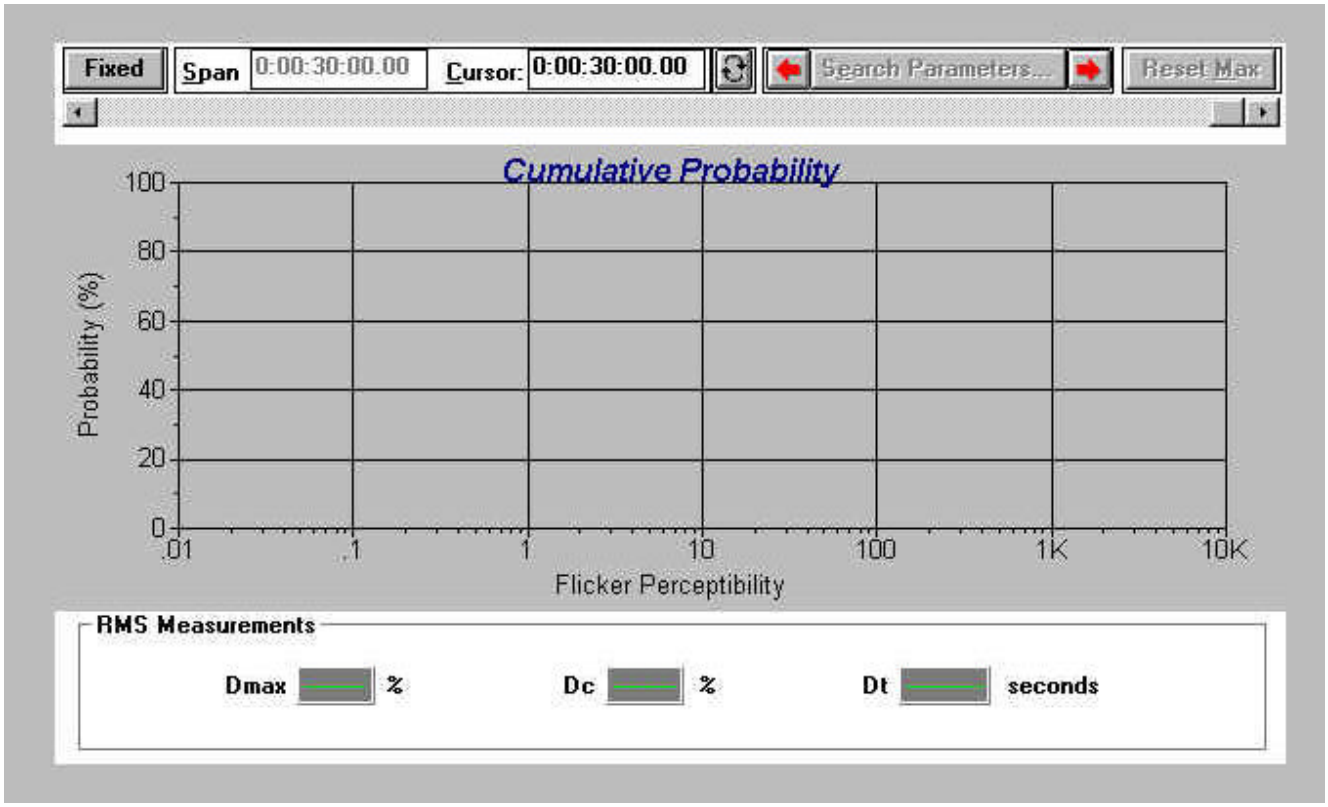
Fixed
Span 0:00:30:00.00
Cursor: 0:00:30:00.00
Search Parameters...
Reset Max
Cumulative Probability
100
80
60
40
20
0
Probability (%)
.01
.1
1
10
100
1K
10K
Flicker Perceptibility
RMS Measurements
Dmax %
Dc %
Dt seconds

SECTION 3 IEC 61000-4-2 (ELECTROSTATIC DISCHARGE)

ELECTROSTATIC DISCHARGE (ESD) IMMUNITY TEST

Port	**:**	Enclosure
Basic Standard	**:**	IEC 61000-4-2
Requirements	**:**	±8 kV (Air Discharge)
		±4kV (Contact Discharge)
		±4kV (Indirect Discharge)
Performance Criteria	**:**	B (Standard require)
Temperature/Humidity	**:**	16^0C /58%
Test By	**:**	Stanley Hunag

Block Diagram of Test Setup:

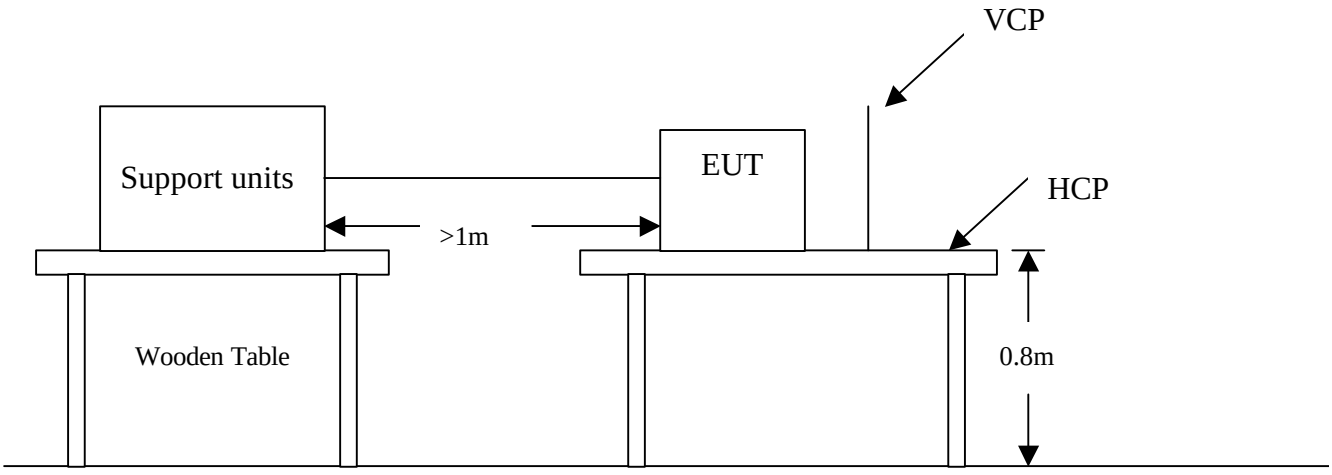

Ground Reference Plane

Test Procedure:

1. The EUT was located 0.1 m minimum from all side of the HCP.
2. The support units were located 1 m minimum away from the EUT.
3. A communication test program was loaded and executed in Windows mode.
4. PC sent transmit data to remote side via EUT.
5. As per the requirement of EN 55024; applying direct contact discharge at the sides other than front of EUT at minimum 50 discharges (25 positive and 25 negative) if applicable, can't be applied direct contact discharge side of EUT then the indirect discharge shall be applied. One of the test points shall be subjected to at least 50 indirect discharge (contact) to the front edge of horizontal coupling plane.
6. Other parts of EUT where it is not possible to perform contact discharge then selecting appropriate points of EUT for air discharge, a minimum of 10 single air discharges shall be applied.
7. The application of ESD to the contact of open connectors is not required.
8. Putting a mark on EUT to show tested points. The following test condition was followed during the tests.

The electrostatic discharges were applied as follows:

Amount of Discharges	Voltage	Coupling	Result (Pass/Fail)
Mini 25 /Point	±4kV	Contact Discharge	Pass
Mini 25 /Point	±4kV	Indirect Discharge HCP (Front)	Pass
Mini 25 /Point	±4kV	Indirect Discharge VCP (Back)	Pass
Mini 25 /Point	±4kV	Indirect Discharge VCP (Left)	Pass
Mini 25 /Point	±4kV	Indirect Discharge VCP (Right)	Pass
Mini 10 /Point	±8kV	Air Discharge	Pass

**** The tested points to EUT, please refer to attached page.**

(Blue arrow mark for contact discharge, red arrow mark for air discharge.)

Performance & Result:

[V] **Criteria A:** The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.

[ ] **Criteria B:** The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.

[ ] **Criteria C:** Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

[V] ***PASS***	[ ] ***FAILED***

Observation: No any function degraded during the tests.

The Tested Points of EUT

(Photo 1 of 6)

(Photo 2 of 6)

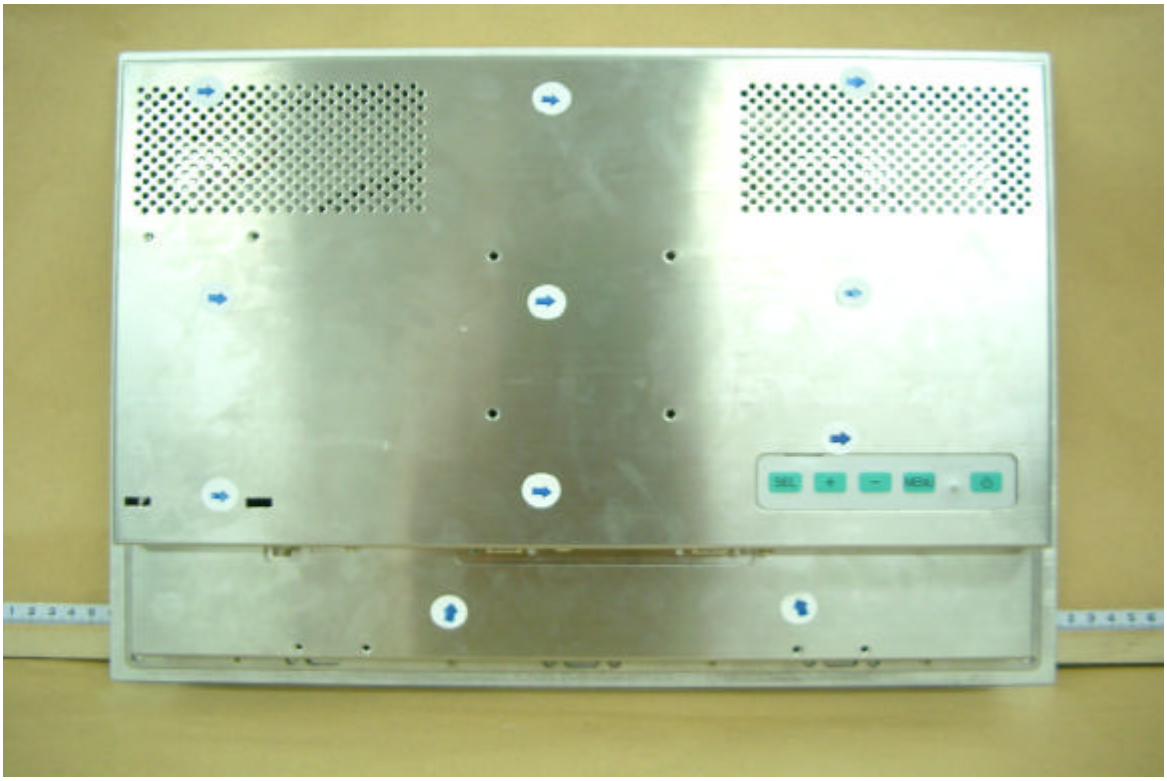

(Photo 3 of 6)

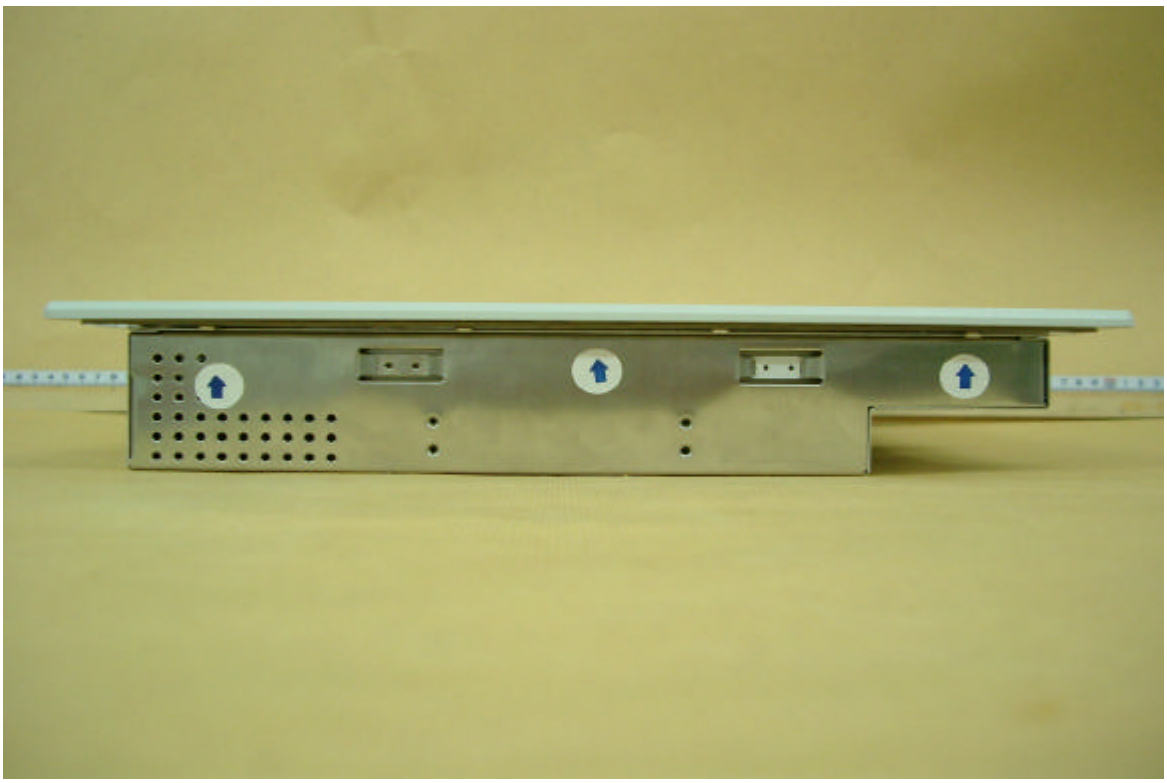

(Photo 4 of 6)

(Photo 5 of 6)

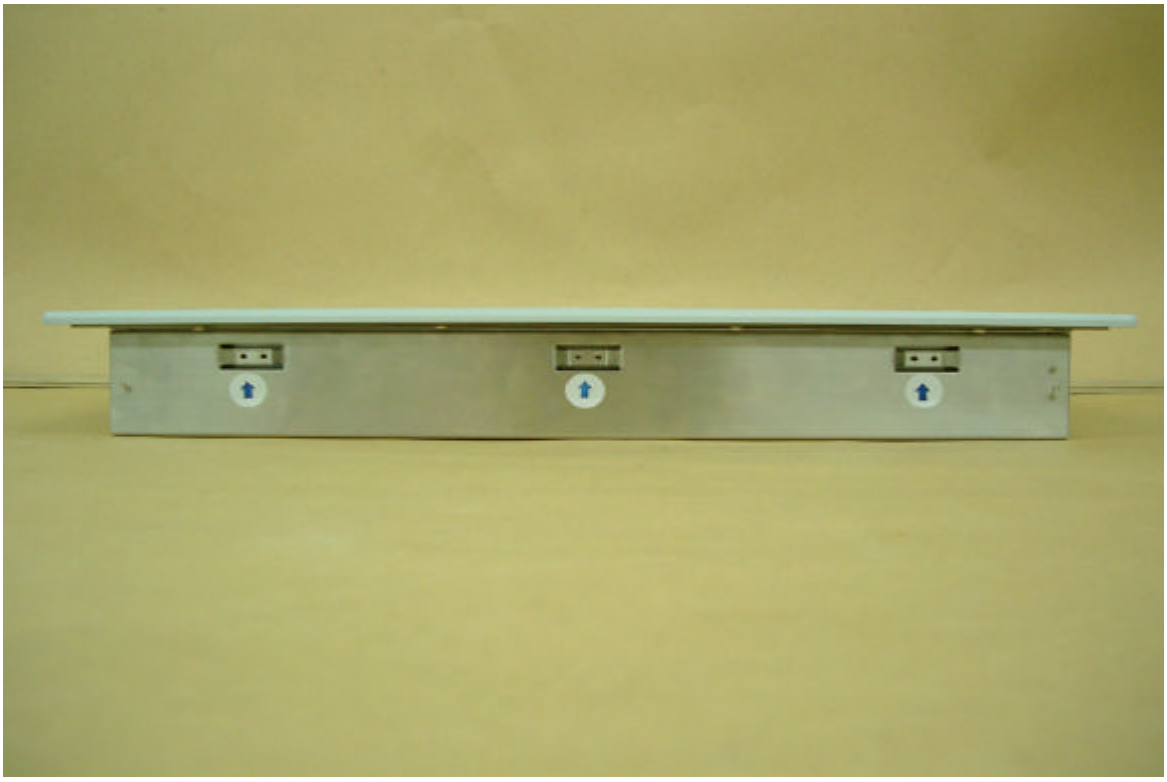

(Photo6 of 6)

SECTION 4 IEC 61000-4-3 (RADIATED ELECTROMAGNETIC FIELD)

RADIATED ELECTROMAGNETIC FIELD IMMUNITY TEST

Port	**:**	Enclosure
Basic Standard	**:**	IEC 61000-4-3
Requirements	**:**	3 V/m / with 80% AM. 1kHz Modulation
Performance Criteria	**:**	A (Standard require)
Tester	**:**	Stanley Huang
Temperature	**:**	18℃
Humidity	**:**	68%
Note	**:**	The EUT not have acoustic interfaces, the annex A of EN 55024 should not be applied.

Block Diagram of Test Setup:

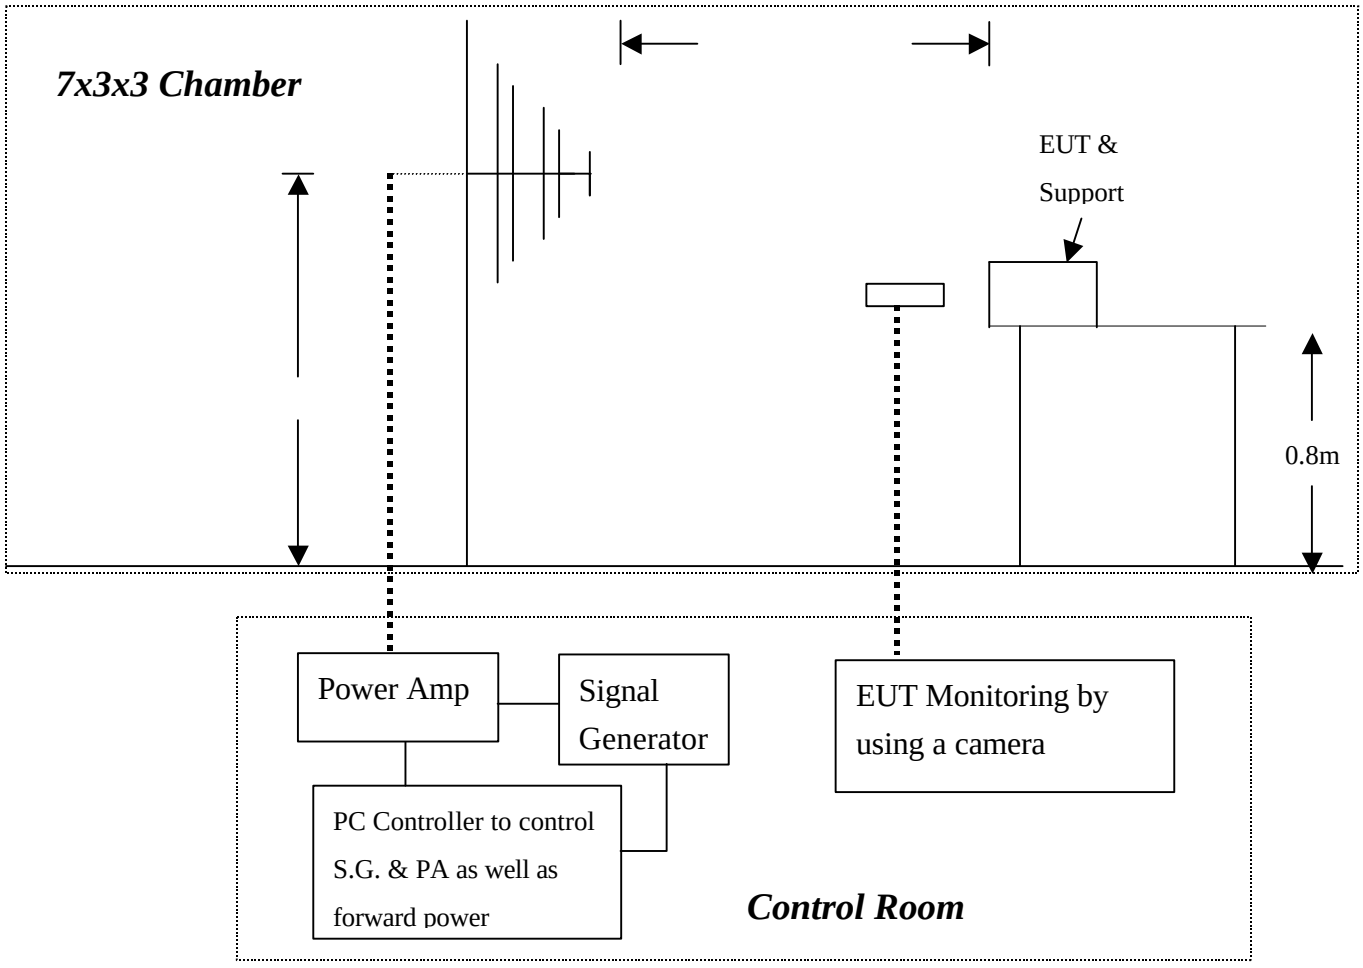

Test Procedure:

1. The EUT and support units were located at the edge of supporting table keep 3 meter away from transmitting antenna, it just the calibrated square area of field uniformity.
2. Adjusting the cables to be exposed to the electromagnetic filed as possible.
3. Performing a Radiated Emission Scan in range of 30 to 1000 MHz prior to do RS test and records the more higher emission frequencies for the reference of RS test, due to antenna effectiveness.
4. Adjusting the monitoring camera to monitor the "H" message as clear as possible.
5. Setting the testing parameters of RS test software per IEC 61000-4-3.
6. Referring to the tested data of step 3 to performing the RS test from 80 to 1000 MHz.
7. Recording the test result in following table.
8. Changing the EUT to the other side and repeat step 3 to 6, until 4 sides of EUT were verified.

IEC 61000-4-3 Final test conditions:

Test level : 3V/m
Steps : 1 % of fundamental
Dwell Time : 3 sec

Range (MHz)	Field	Modulation	Polarity	Position (°)	Result (Pass/Fail)
80-1000	3V	Yes	H	Front	Pass
80-1000	3V	Yes	V	Front	Pass
80-1000	3V	Yes	H	Right	Pass
80-1000	3V	Yes	V	Right	Pass
80-1000	3V	Yes	H	Back	Pass
80-1000	3V	Yes	V	Back	Pass
80-1000	3V	Yes	H	Left	Pass
80-1000	3V	Yes	V	Left	Pass

Performance & Result:

[V] **Criteria A:** The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.

[ ] **Criteria B:** The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.

[ ] **Criteria C:** Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

[V] ***PASS***	[ ] ***FAILED***
Observation: No any function degraded during the tests.	

SECTION 5 IEC 61000-4-4 (FAST TRANSIENTS/BURST)

FAST TRANSIENTS/BURST IMMUNITY TEST

Port	**:** On Power Lines
Basic Standard	**:** IEC 61000-4-4
Requirements	**:** ±1kV for Power Supply Lines
Performance Criteria	**:** B (Standard require)
Temperature	**:** 18^0C
Humidity	**:** 68%
Test By	**:** Stanley Huang

Block Diagram of Test Setup:

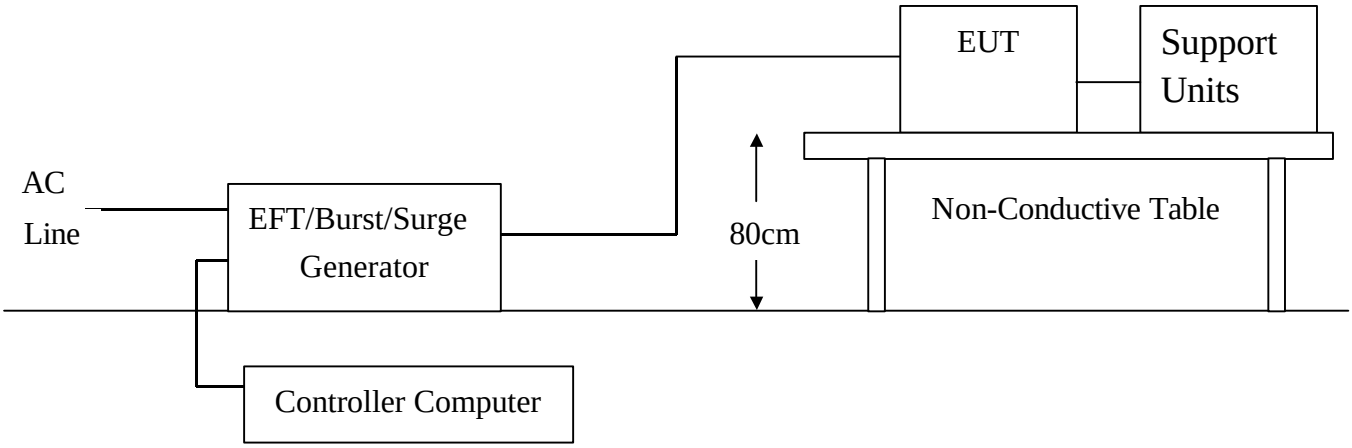

Test Procedure:

1. The EUT and support units were located on a wooden table 0.8 m away from ground reference plane.
2. A 1.0 meter long power cord was attached to EUT during the test.
3. The length of communication cable between communication port and clamp was keeping within 1 meter.
4. A test program was loaded and executed in Windows mode.
5. The data was display on the monitor and filling the screens.
6. The test program exercised related support units sequentially.
7. Repeating step 3 to 6 through the test.
8. Recording the test result as shown in following table.

Test conditions:
Impulse Frequency: 5kHz
Tr/Th: 5/50ns
Burst Duration: 15ms
Burst Period: 300mS

Inject Line	Voltage kV	Inject Method	Result (Pass/Fail)
L1	+/- 1	Direct	Pass
N	+/- 1	Direct	Pass
PE	+/- 1	Direct	Pass
L1+N	+/- 1	Direct	Pass
L1+PE	+/- 1	Direct	Pass
N+PE	+/- 1	Direct	Pass
L1+N+PE	+/- 1	Direct	Pass

Performance & Result:

[V] **Criteria A:** The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.

[ ] **Criteria B:** The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.

[ ] **Criteria C:** Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

[V] ***PASS*** [ ] ***FAILED***

Observation: No any function degraded during the tests.

SECTION 6 IEC 61000-4-5 (SURGE IMMUNITY)

SURGE IMMUNITY TEST

Port	**:**	Power Cord
Basic Standard	**:**	IEC 61000-4-5
Requirements	**:**	+/- 1kV (Line to Line of Power Port)
		+/- 2kV (Line to Earth of Power Port)
Performance Criteria	**:**	B (Standard require)
Temperature	**:**	18℃
Humidity	**:**	68%
Test By	**:**	Stanley Huang

Block Diagram of Test Setup:

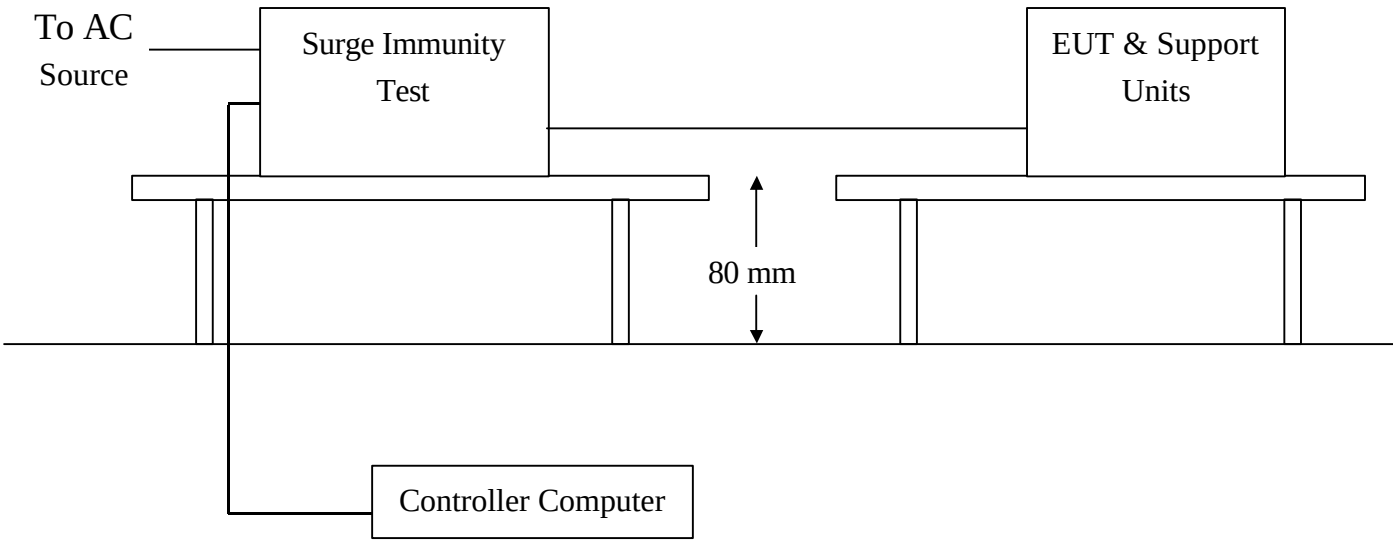

Test Procedure:

1. The EUT and support units were located on a wooden table 0.8 m away from ground floor.
2. A test program was loaded and executed in Windows mode.
3. The data was display on the monitor and filling the screens.
4. The test program exercised related support units sequentially.
5. Repeating step 3 to 4 through the test.
6. Recording the test result as shown in following table.

Test conditions:
Voltage Waveform : 1.2/50 us
Current Waveform : 8/20 us
Polarity : Positive/Negative
Phase angle : 0°, 90°, 270°
Number of Test : 5

Coupling Line	Voltage (kV)	Polarity	Coupling Method	Result (Pass/Fail)
L1-L2、 L1-PE、 L2-PE	1	Positive	Capacitive	Pass
L1-L2、 L1-PE、 L2-PE	1	Negative	Capacitive	Pass
L1-PE、L2-PE	2	Positive	Capacitive	Pass
L1-PE、L2-PE	2	Negative	Capacitive	Pass

Performance & Result:

[V] **Criteria A:** The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.

[ ] **Criteria B:** The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.

[ ] **Criteria C:** Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

[V] ***PASS*** [ ] ***FAILED***

Observation: No any function degraded during the tests.

SECTION 7 IEC 61000-4-6 (CONDUCTED DISTRBANCE/INDUCED BY RADIO-FREQUENCY FIELD)

CONDUCTED DISTURBANCE, INDUCED BY RADIO-FREQUENCY FIELDS

Port	**:** AC Port
Basic Standard	**:** IEC 61000-4-6
Requirements	**:** 3V with 80% AM. Modulation
Injection Method	**:** CDN-M2
Performance Criteria	**:** A (Standard require)
Temperature	**:** 18^0C
Humidity	**:** 68%
Test By	**:** Stanley

Block Diagram of Test Setup:

Side view:

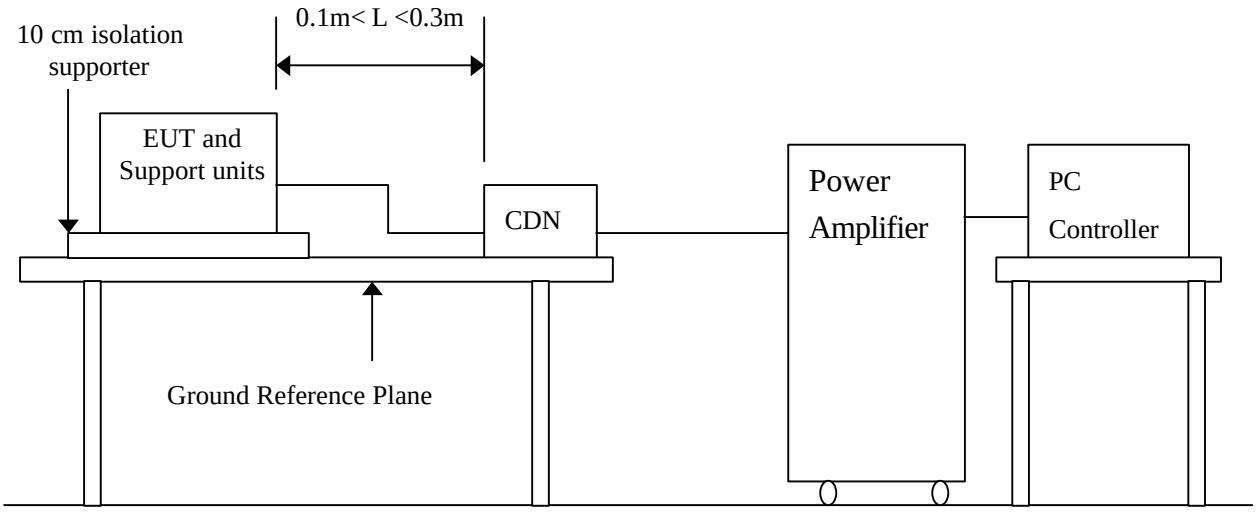

Top view:

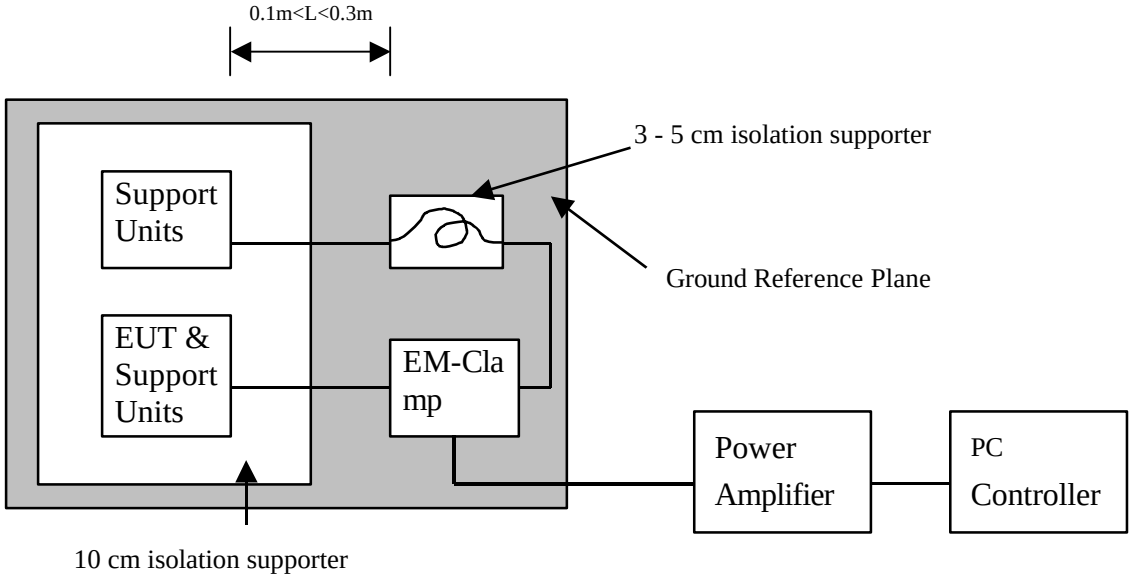

Test Procedure:

1. The EUT and support units were located at a ground reference plane with the interposition of a 0.1 m thickness insulating support and the CDN was located on GRP directly.
2. Transmit data messages were displayed on screen of Monitor.
3. Adjusting the monitoring camera to monitor the transmit data message as clear as possible.
4. Setting the testing parameters of CS test software per EN 61000-4-6.
5. Recording the test result in following table.

Test conditions:

Frequency Range : 0.15MHz-80MHz

Frequency Step : 1% of fundamental

Dwell Time : 3 sec

Range (MHz)	Field	Modulation	Result (Pass/Fail)
0.15-80	3V	Yes	Pass

Performance & Result:

☑ **Criteria A:** The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.

☐ **Criteria B:** The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.

☐ **Criteria C:** Temporary loss of function is allowed, provided the functions self-recoverable or can be restored by the operation of controls.

☑ ***PASS*** ☐ ***FAILED***

Observation: No any function degraded during the tests.

SECTION 8 IEC 61000-4-8 (POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST)

POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST

Port	**:** Enclosure
Basic Standard	**:** IEC 61000-4-8
Requirements	**:** 1 A/m
Performance Criteria	**:** A (Standard Required)
Temperature	**:** N/A
Humidity	**:** N/A
Test By	**:** N/A

Block Diagram of Test Setup:

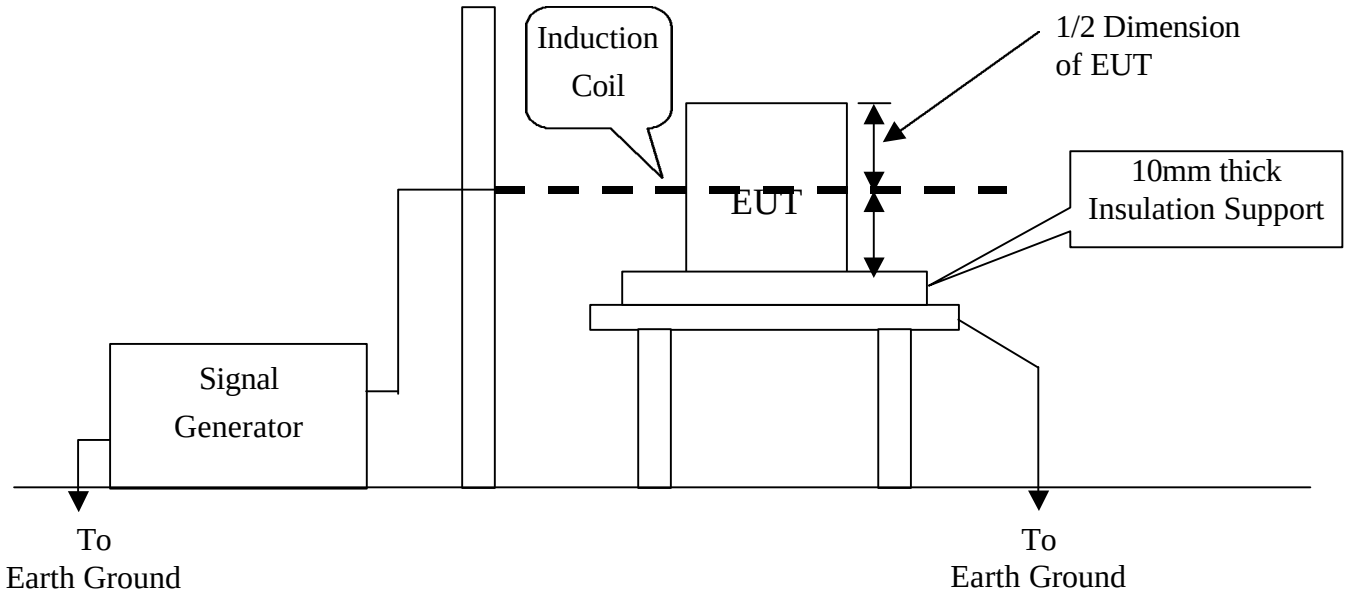

Test Procedure:

1. The EUT and support units were located on Ground Reference Plane with the interposition of a 0.1 m thickness insulation support.
2. Putting the induction coil on horizontal direction.(X direction)
3. A test program was loaded and executed in Windows mode.
4. The data was sent to the screen of EUT and filling the screen with upper case of "H" patterns.
5. The test program exercised related support units sequentially.
6. Repeating step 3 to 5 through the test.
7. Recording the test result as shown in following table.
8. Rotating the induction coil by 90^0 (Y direction) then repeat step 3 to 7.
9. Rotating the induction coil by 90^0 again (Z direction) then repeat step 3 to 7.

*. Test conditions:
Field Strength: 1A/m
Power Freq.: 50Hz
Orientation: X, Y, Z

Orientation	Field	Result (Pass/Fail)	Remark

****Note:** Not applicable, because no any component can be influenced by power magnetic fields.

Performance & Result:

☐ **Criteria A:** The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.

☐ **Criteria B:** The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.

☐ **Criteria C:** Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

PASS ☐ ***FAILED***
Observation: N/A(EUT Without any magnetic component)

SECTION 9 IEC 61000-4-11 (VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS)

VOLTAGE DIPS / SHORT INTERRUPTIONS

Port : AC mains
Basic Standard : IEC 61000-4-11 (1994)
Requirement : PHASE ANGLE 0, 45, 90, 135, 180, 225, 270, 315 degrees

	Test Level % U_T	Reduction (%)	Duration (periods)	Performance Criteria
Voltage Dips	<5	>95	0.5	B
	70	30	25	C

	Test Level % U_T	Reduction (%)	Duration (periods)	Performance Criteria
Voltage Interceptions	<5	>95	250	C

Test Interval : Min. 10 sec.
Temperature : 18^0C
Humidity : 68%
Test By : Stanley Huang

Block Diagram of Test Setup:

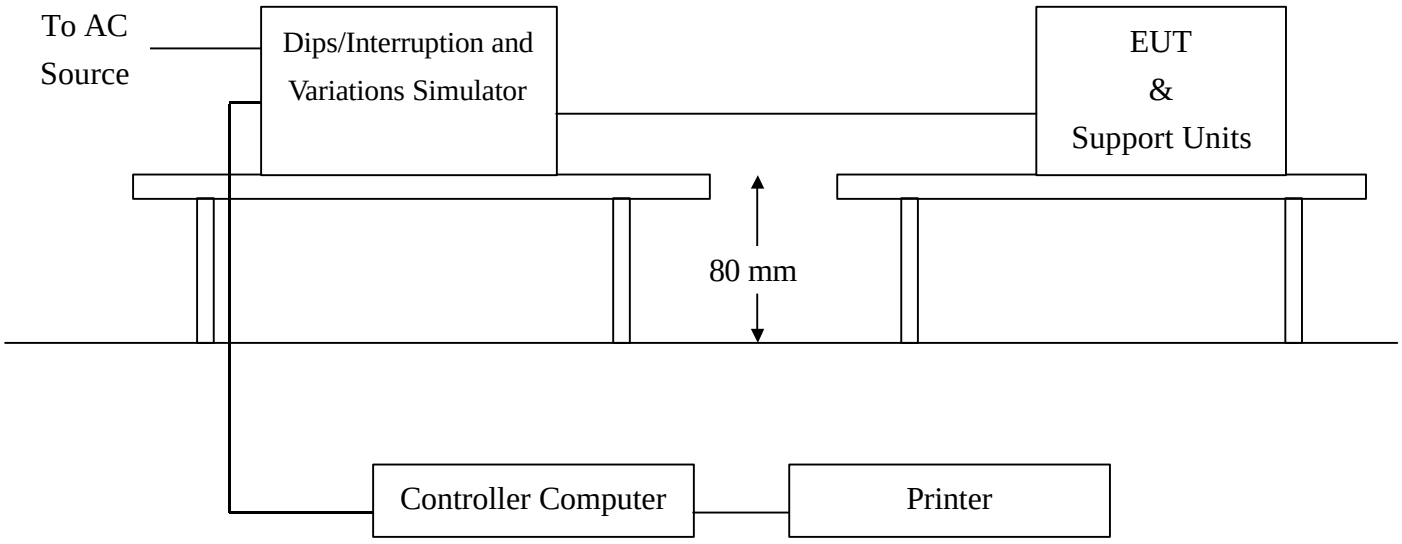

Test Procedure:

1. The EUT and support units were located on a wooden table, 0.8 m away from ground floor.
2. A test program was loaded and executed in Windows mode.
3. The data was displayed on the monitor and filling the screens.
4. The test program exercised related support units sequentially.
5. Setting the parameter of tests and then Perform the test software of test simulator.
6. Conditions changes to occur at 0 degree crossover point of the voltage waveform.
7. Repeating step 3 to 4 through the test.
8. Recording the test result in test record form.

Test conditions:

The duration with a sequence of three dips/interruptions with interval of 10s minimum (between each test events)

Voltage Dips:

Test Level % U_T	Reduction (%)	Duration (periods)	Observation	Meet Performance Criteria
0	100	0.5	Normal	A
70	30	25	Normal	A

Voltage Interruptions:

Test Level % U_T	Reduction (%)	Duration (periods)	Observation	Meet Performance Criteria
0	100	250	EUT shut down, But EUT can be auto recovered after EUT restart.	C

Normal: No any functions degrade during and after the test.

Performance & Result:

Criteria A: The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.

Criteria B: The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.

Criteria C: Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

[V] ***PASS***	[ ] ***FAILED***

APPENDIX 1

PHOTOGRAPHS OF TEST SETUP

LINE CONDUCTED EMISSION TEST (EN 55022)

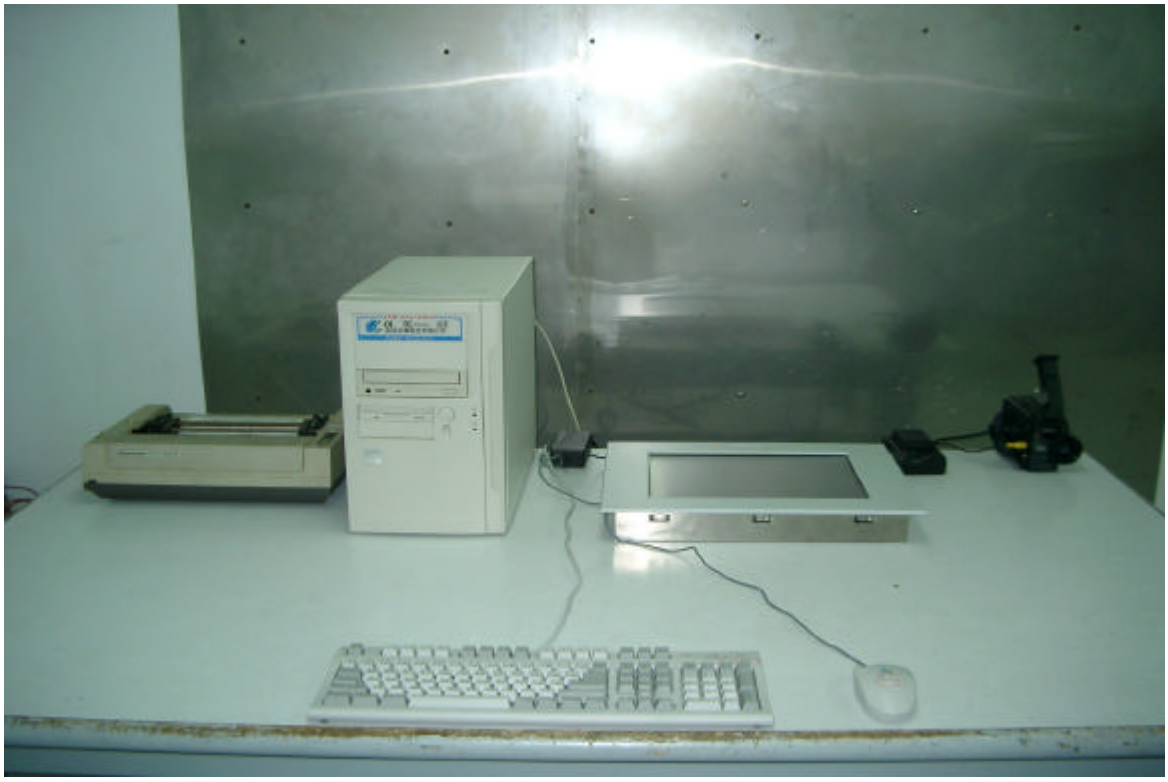

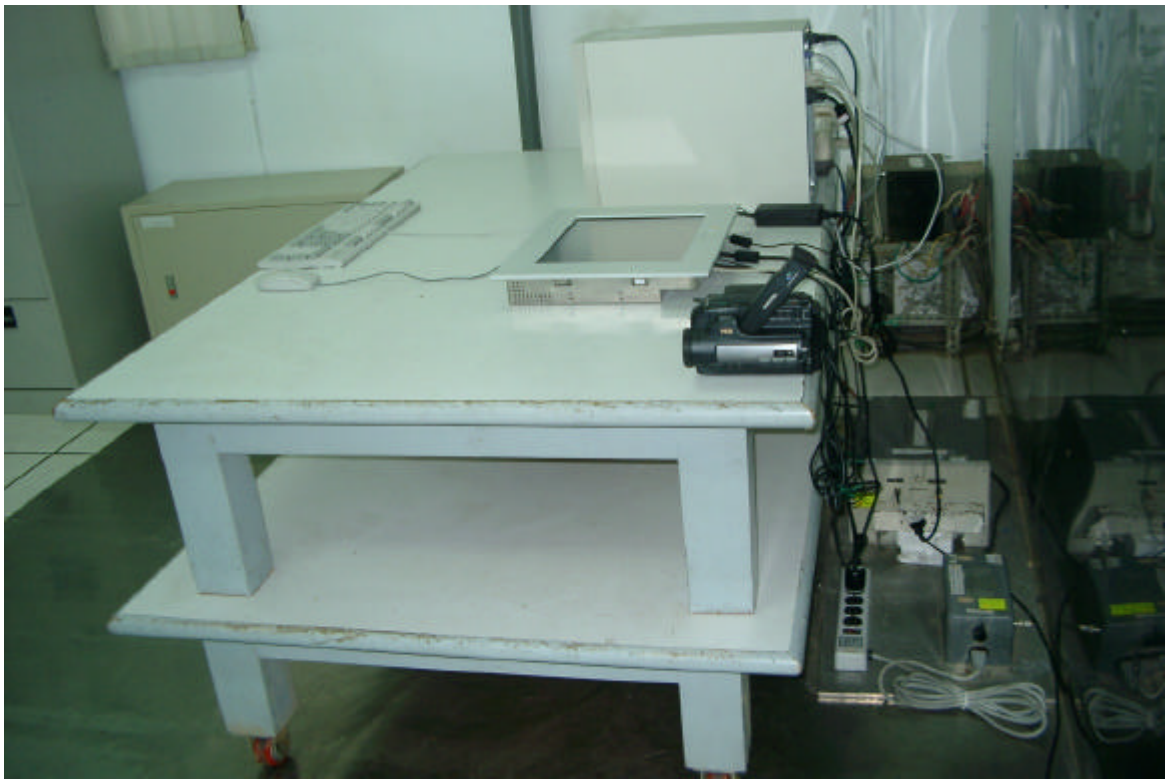

RADIATED EMISSION TEST (EN 55022)

POWER HARMONIC & VOLTAGE FLUCTUATION / FLICKER TEST

(EN 61000-3-2, EN 61000-3-3)

ELECTROSTATIC DISCHARGE TEST (IEC 61000-4-2)

RADIATED ELECTROMAGNETIC FIELD (IEC 61000-4-3)

Front View

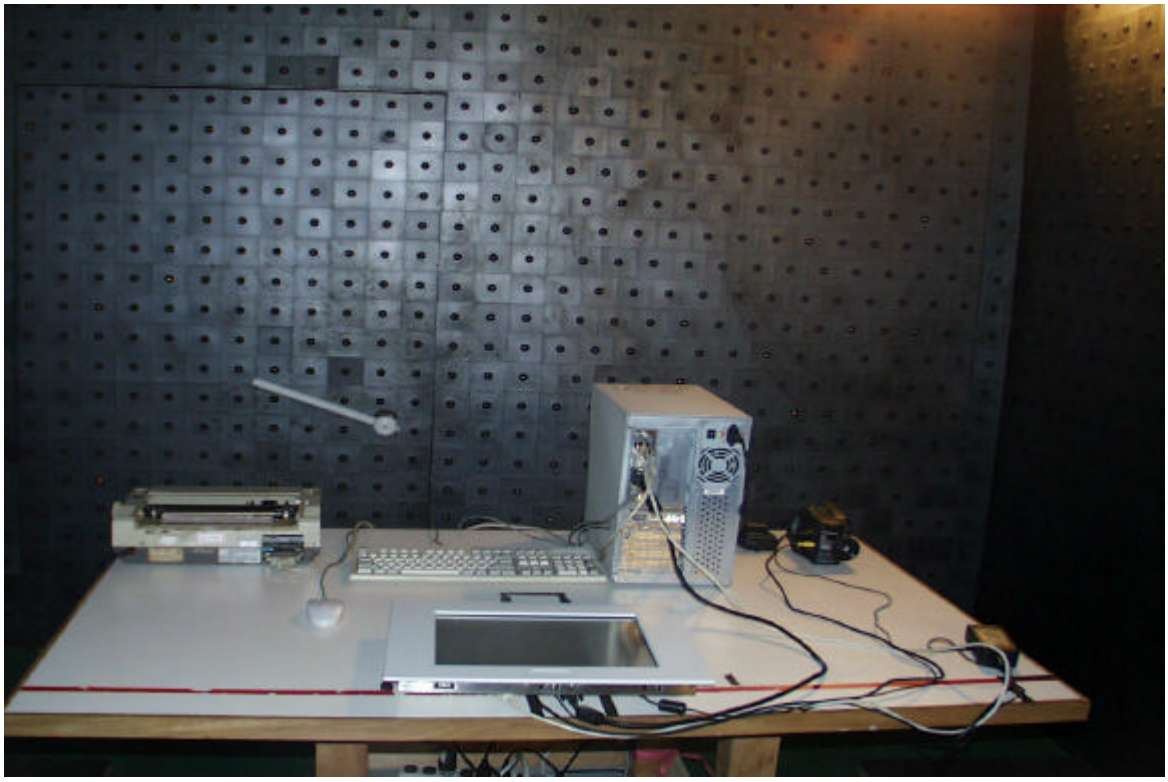

Back View

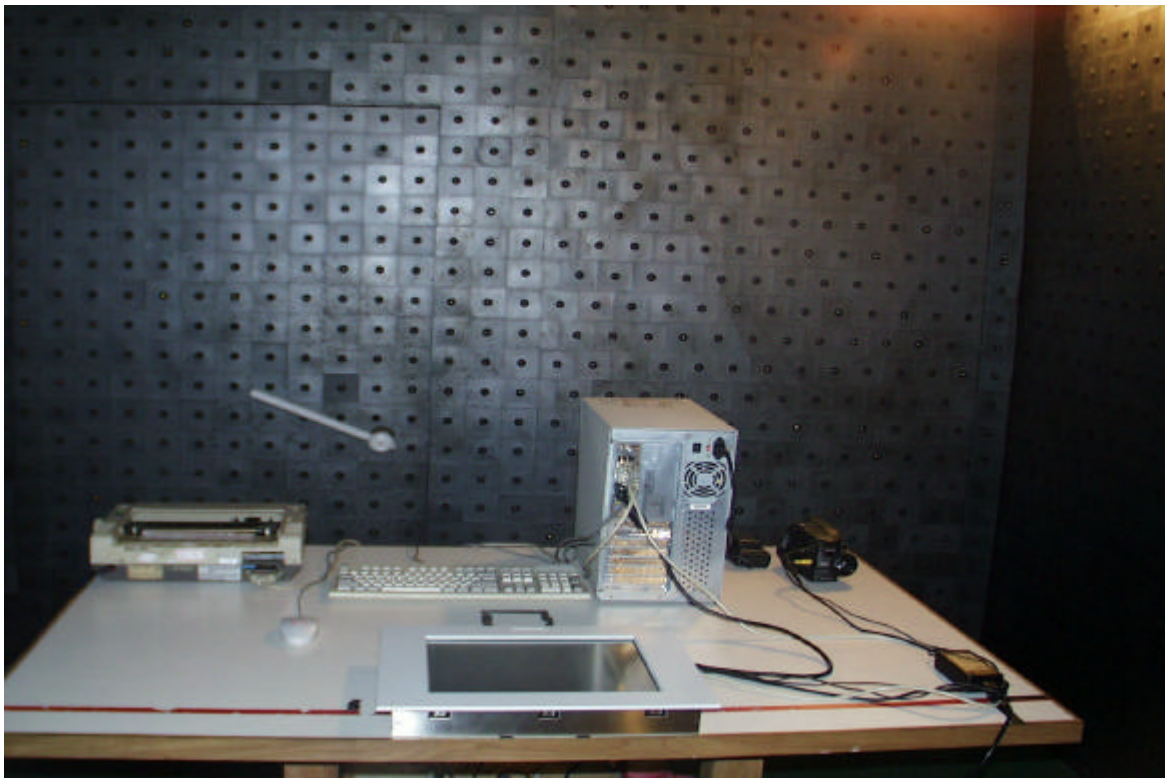

Right View

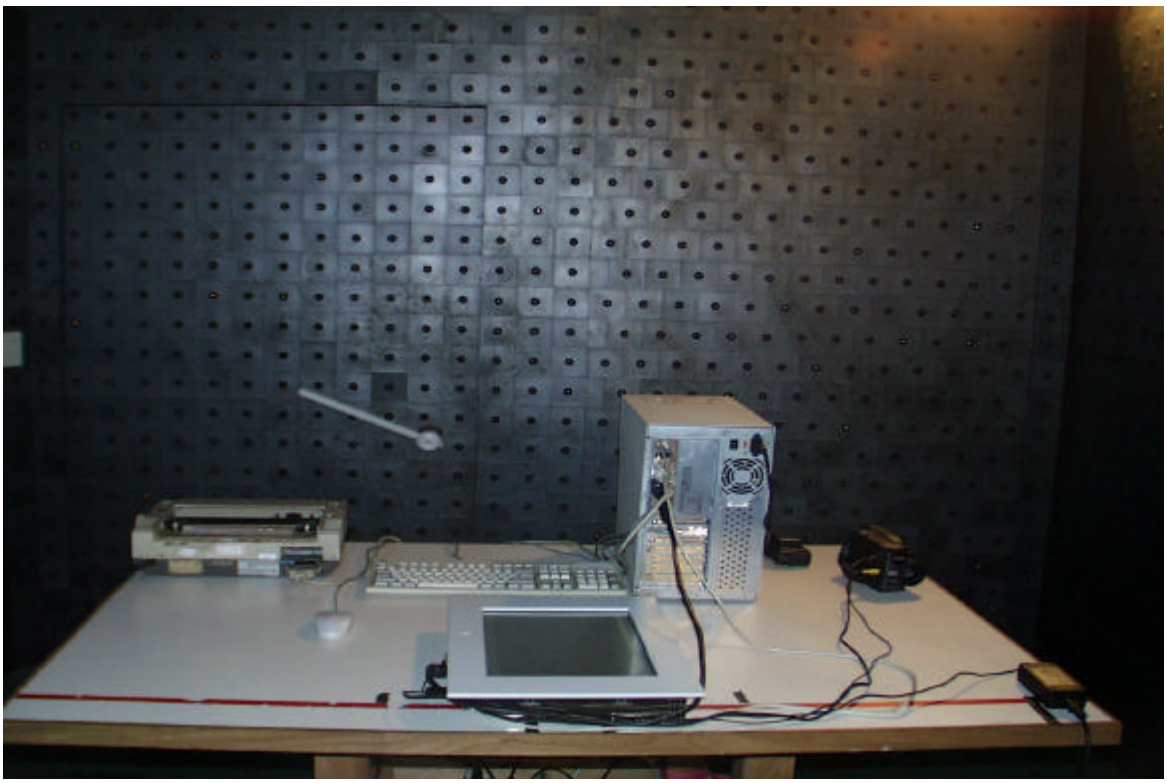

Left View

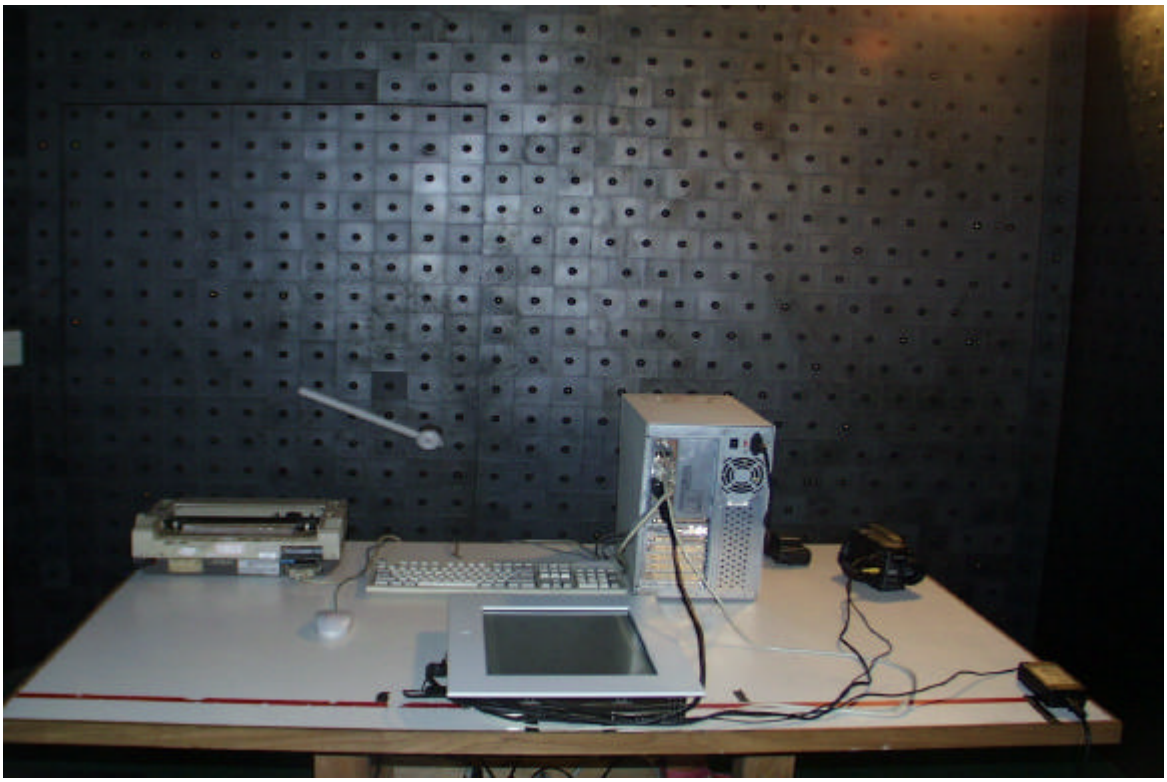

FAST TRANSIENTS/BURST TEST & SURGE IMMUNITY TEST (IEC 61000-4-4/5)

CONDUCTED DISTURBANCE, INDUCED BY RADIO-FREQUENCY FIELDS TEST (IEC 61000-4-6)

VOLTAGE DIPS / INTERRUPTION TEST (IEC 61000-4-11)

APPENDIX 2

PHOTOGRAPHS OF EUT

Model Number: OPD-215ABT

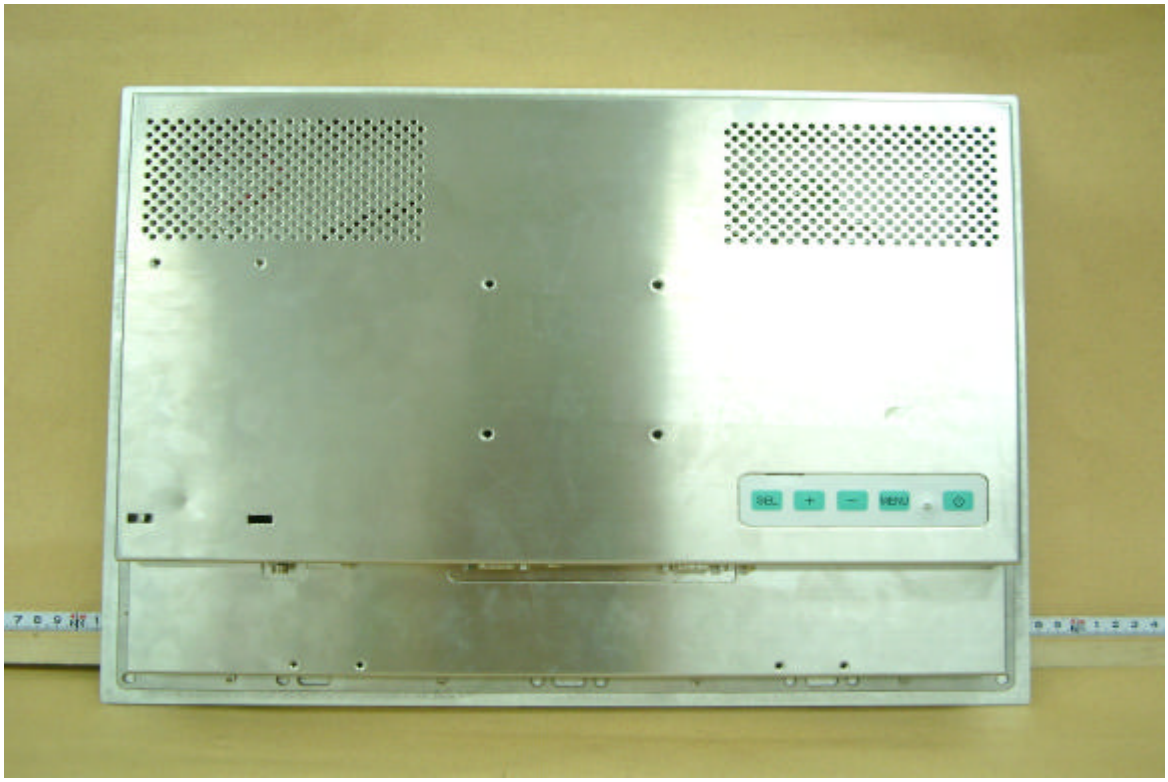

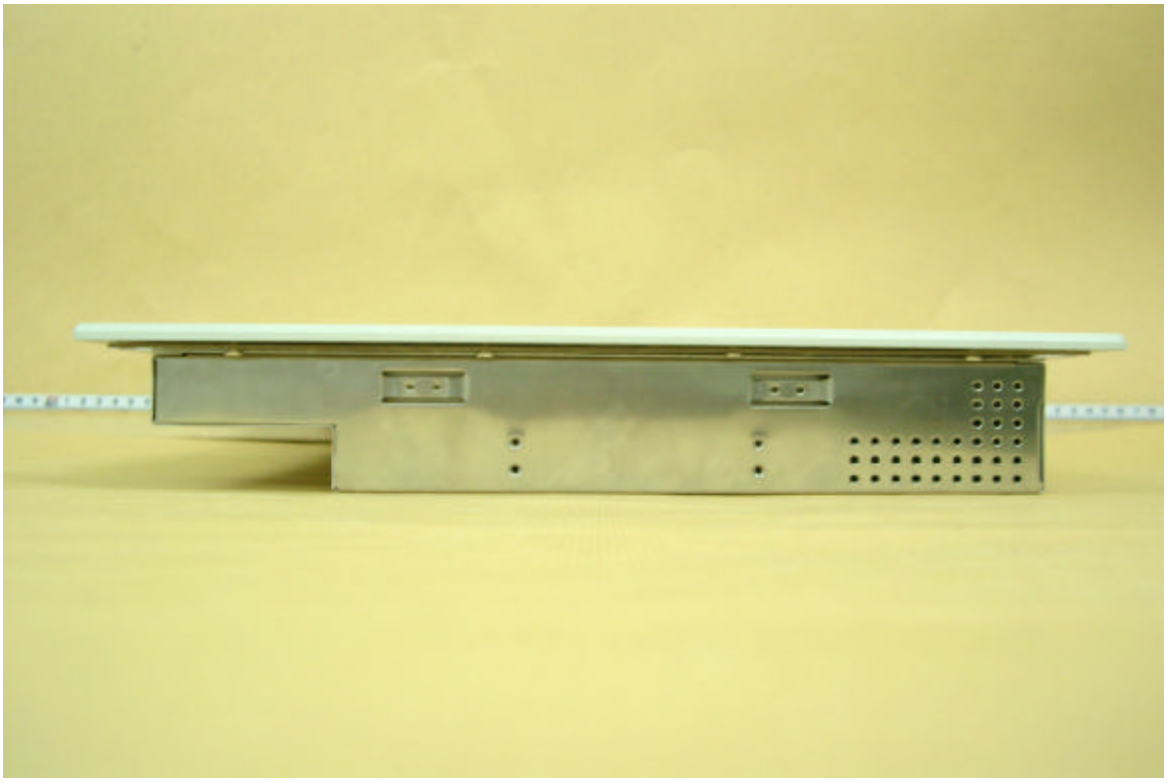

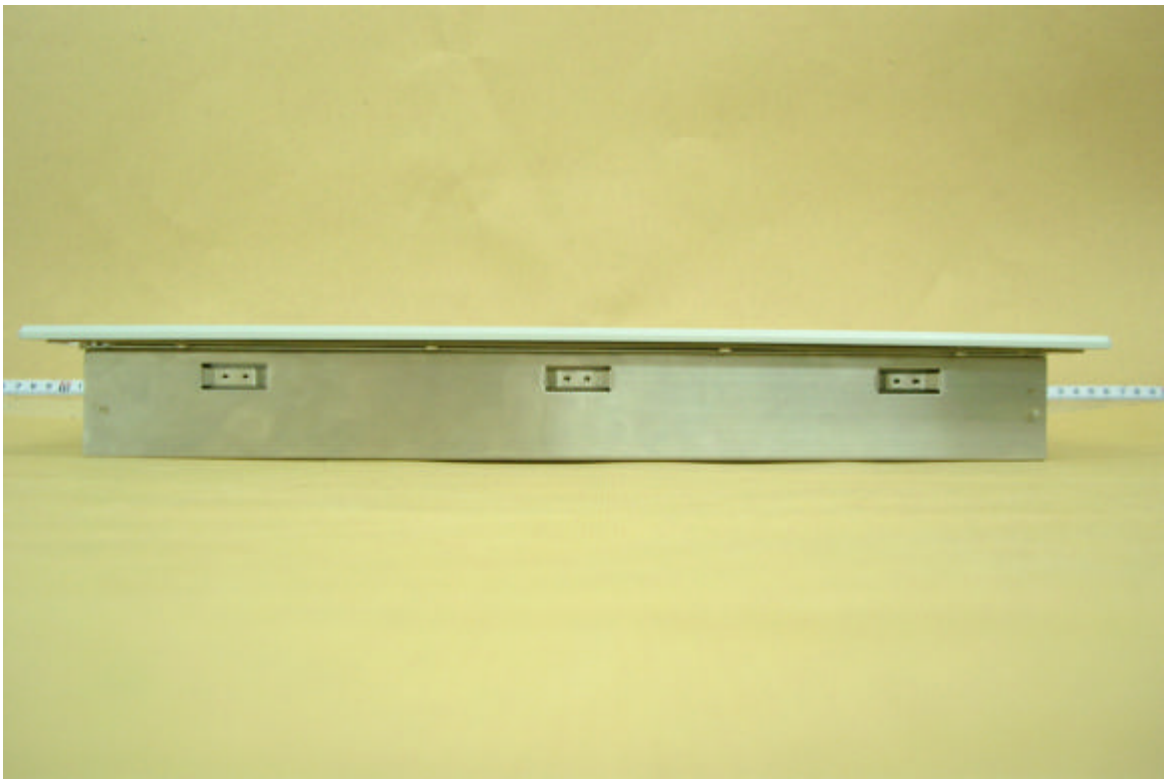

Model Number: OPD-215ART

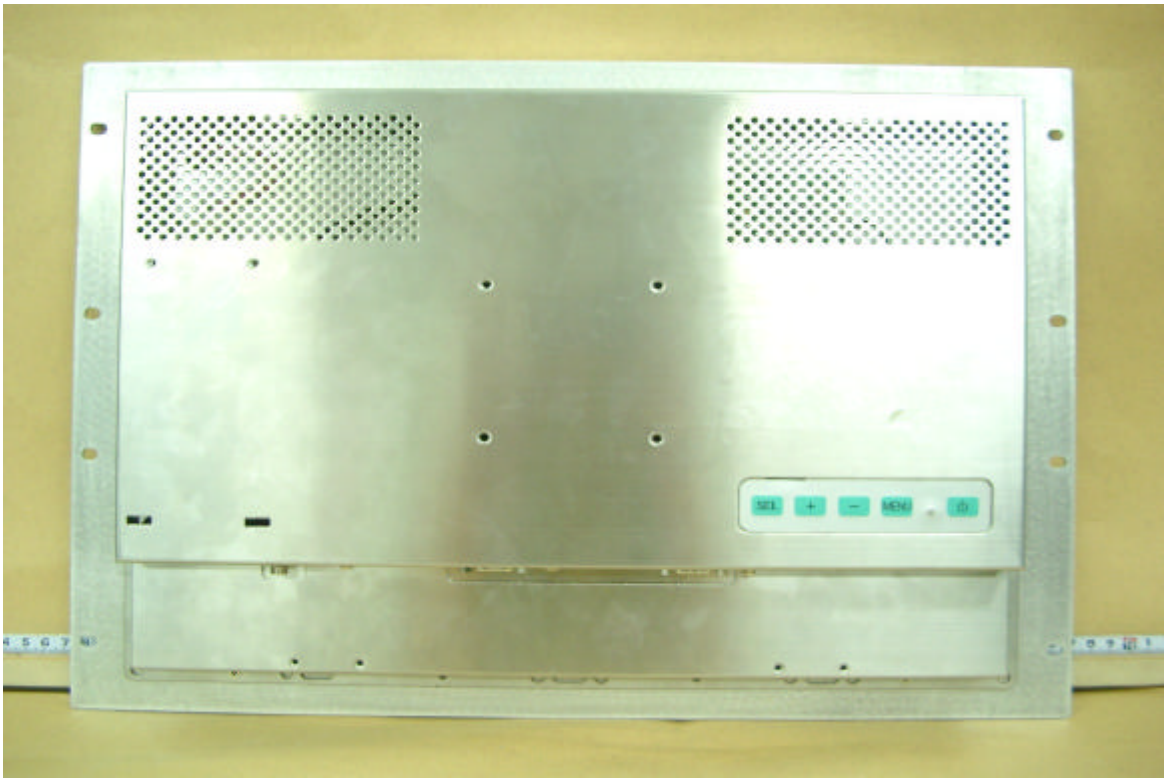

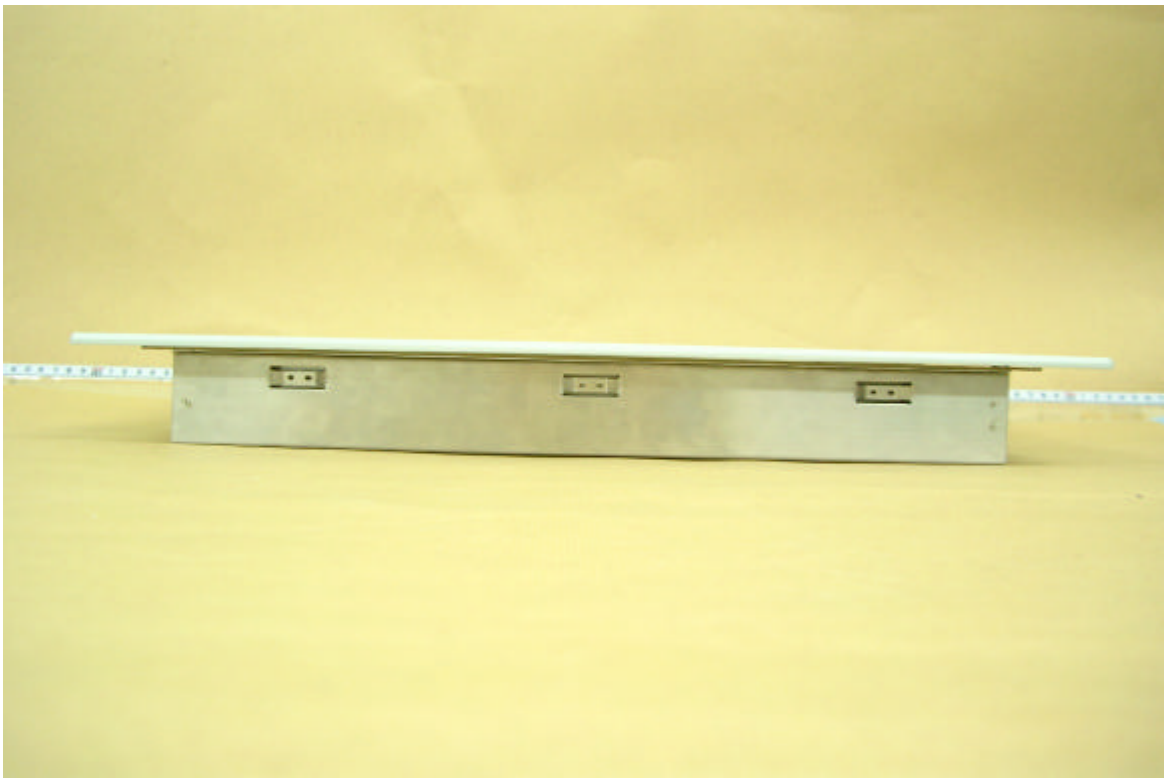

Model Number: OPD-215AT

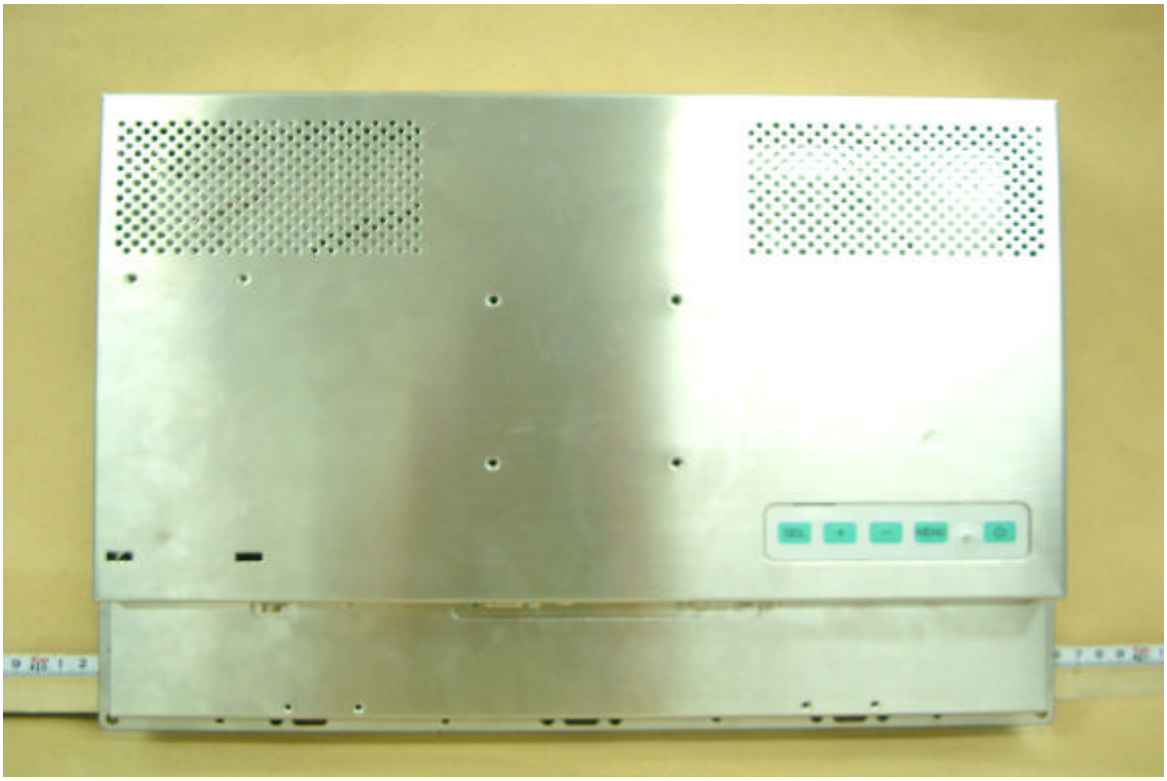

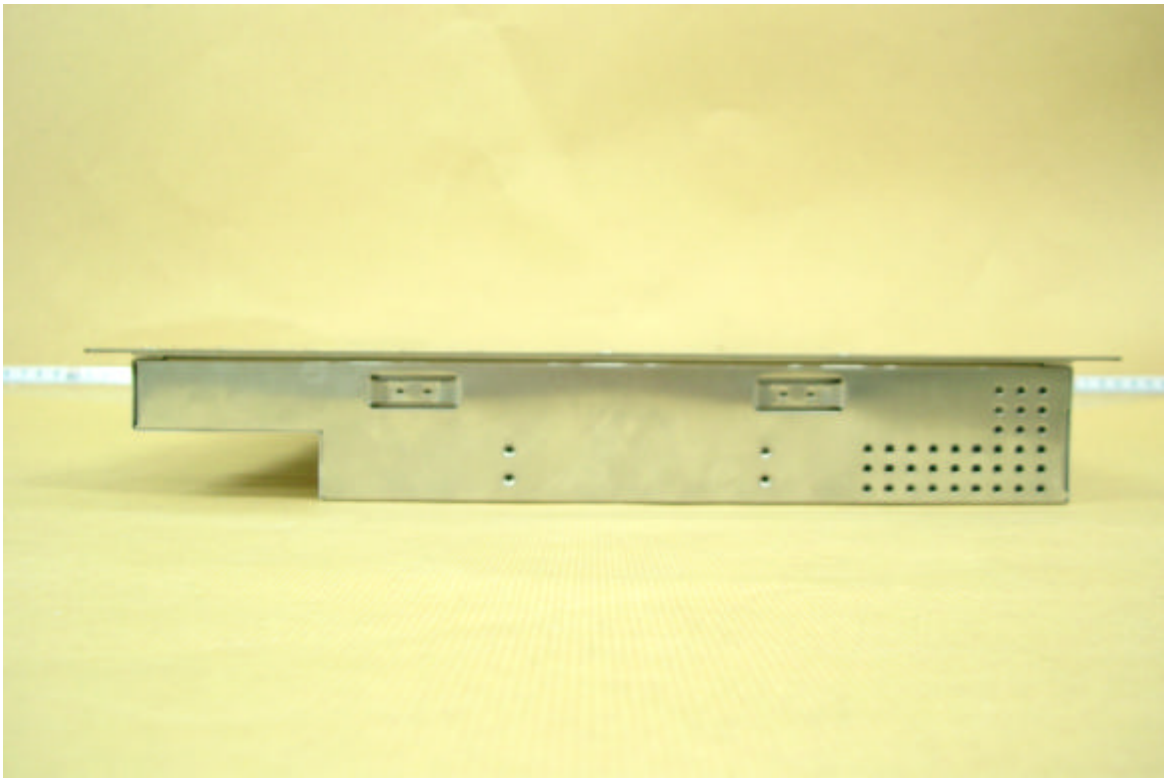

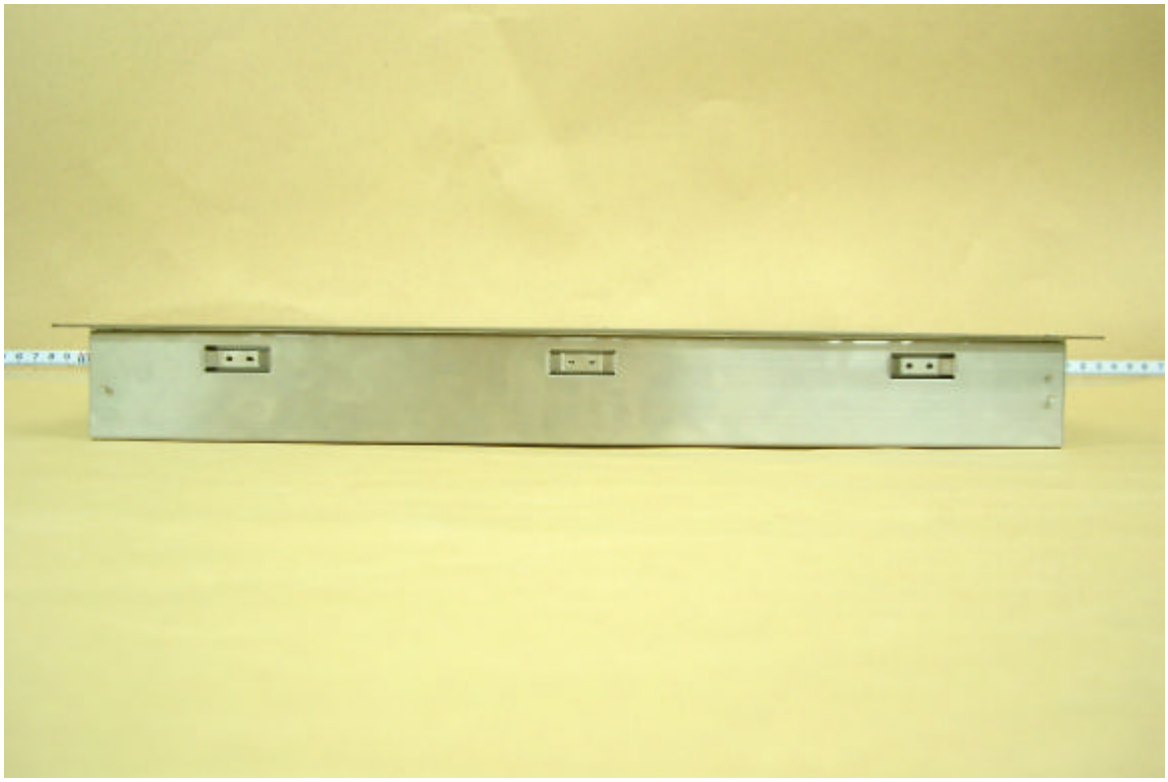

Cable & Adaptor

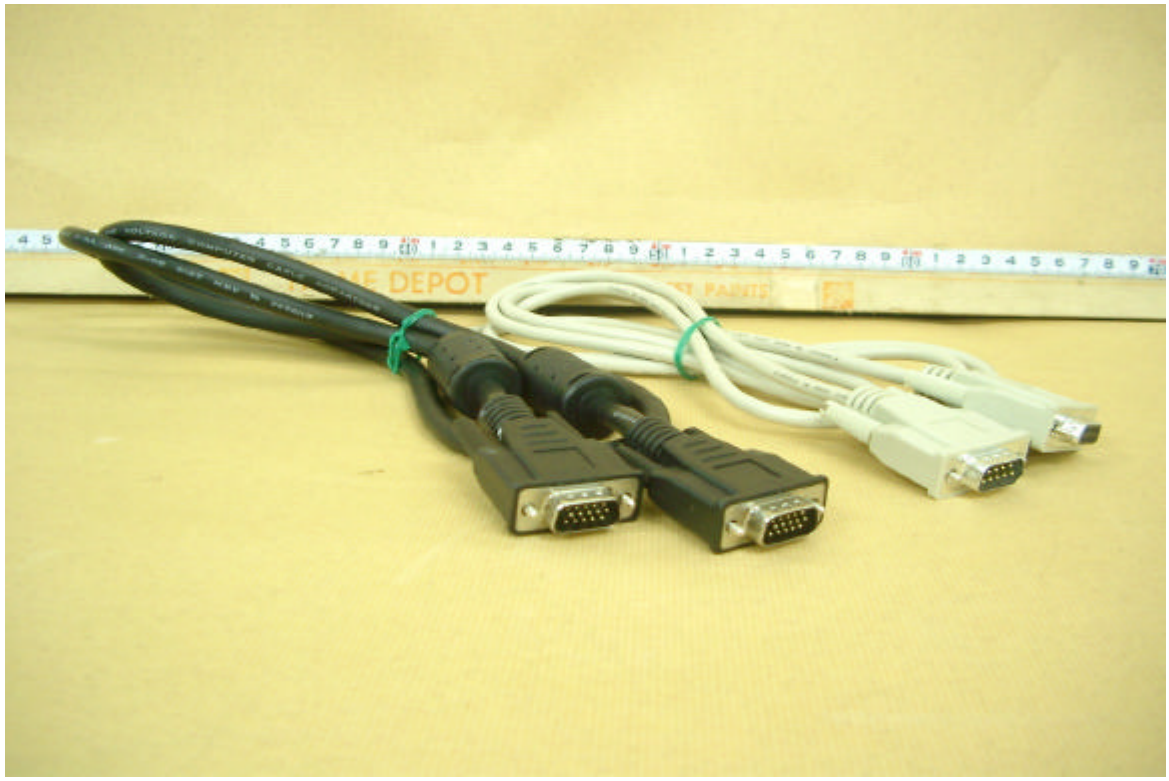


EDAC POWER ELEC.
AC ADAPTER
MODEL: EA1050A
AC INPUT:100-240V~ 1.8A,50-60Hz
DC OUTPUT:12~17V ⎓ 5.0A MAX.
OR 60W MAX.
CAUTION:
FOR INDOOR USE ONLY.
I.T.E. USE ONLY
Endast för kontorsmaskin
TYPICAL OUTPUT VOLTAGE
12V 13V 14V 15V 16V 17V
DATE CODE
LISTED
LPS
MADE IN TAIWAN

APPENDIX 3

CONDUCTED EMISSION PLOT
RADIATED EMISSION DATA

COMPLIANCE Engineering Service, Inc.
FCC,VCCI,CISPR,CE
UL,CSA,TUV

No. 199, Chung Sheng Road,
Hsin Tien City, Taipei,
Taiwan, R.O.C.
Tel:02-2217-0894 Fax:02-2217-1254

Data#: 66 File#: 0031c.emi Date: 2002-03-29 Time: 10:31:39

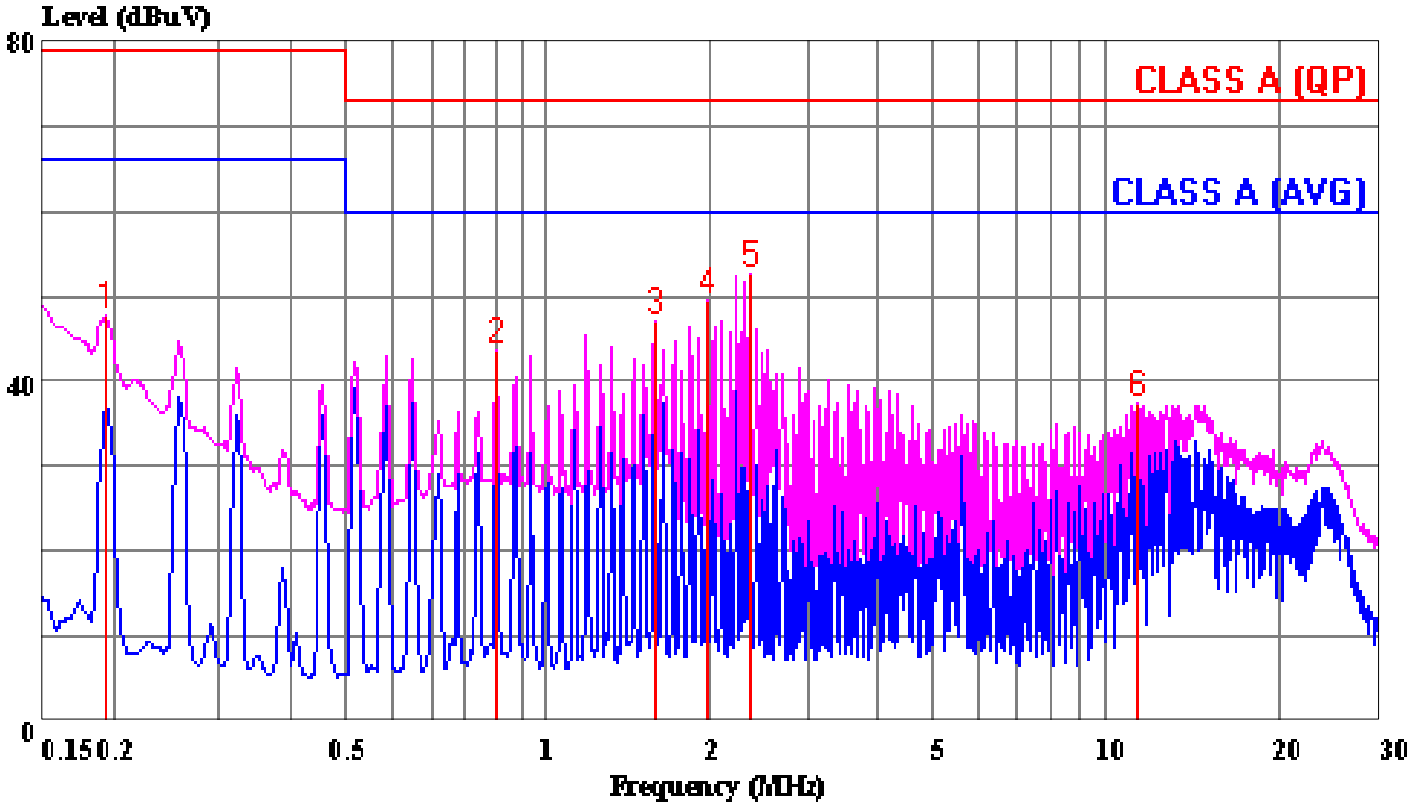

(Conducted)

Trace: 55 56 Ref Trace:

Condition: LINE
Report No. : 02E0031
Test Engr. : CLIFF LAI
Company : AAEON Technology Inc.
EUT : OPD-215ABT
Test Config : EUT/ ALL PERIPHERALS
Type of Test: EN 55022 CLASS A
Mode of Op. : 1024X768 (WORST)

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.192	47.65	0.02	47.67	79.00	-31.33	Peak
2	0.904	43.41	0.08	43.49	73.00	-29.51	Peak
3	1.689	46.83	0.12	46.95	73.00	-26.05	Peak
4	2.088	49.22	0.14	49.35	73.00	-23.65	Peak
5	2.474	52.51	0.16	52.67	73.00	-20.33	Peak
6	11.498	37.02	0.36	37.38	73.00	-35.62	Peak

COMPLIANCE Engineering Service, Inc.
FCC,VCCI,CISPR,CE
UL,CSA,TUV

No. 199, Chung Sheng Road,
Hsin Tien City, Taipei,
Taiwan, R.O.C.
Tel:02-2217-0894 Fax:02-2217-1254

Data#: 65 File#: 0031c.emi Date: 2002-03-29 Time: 10:30:13

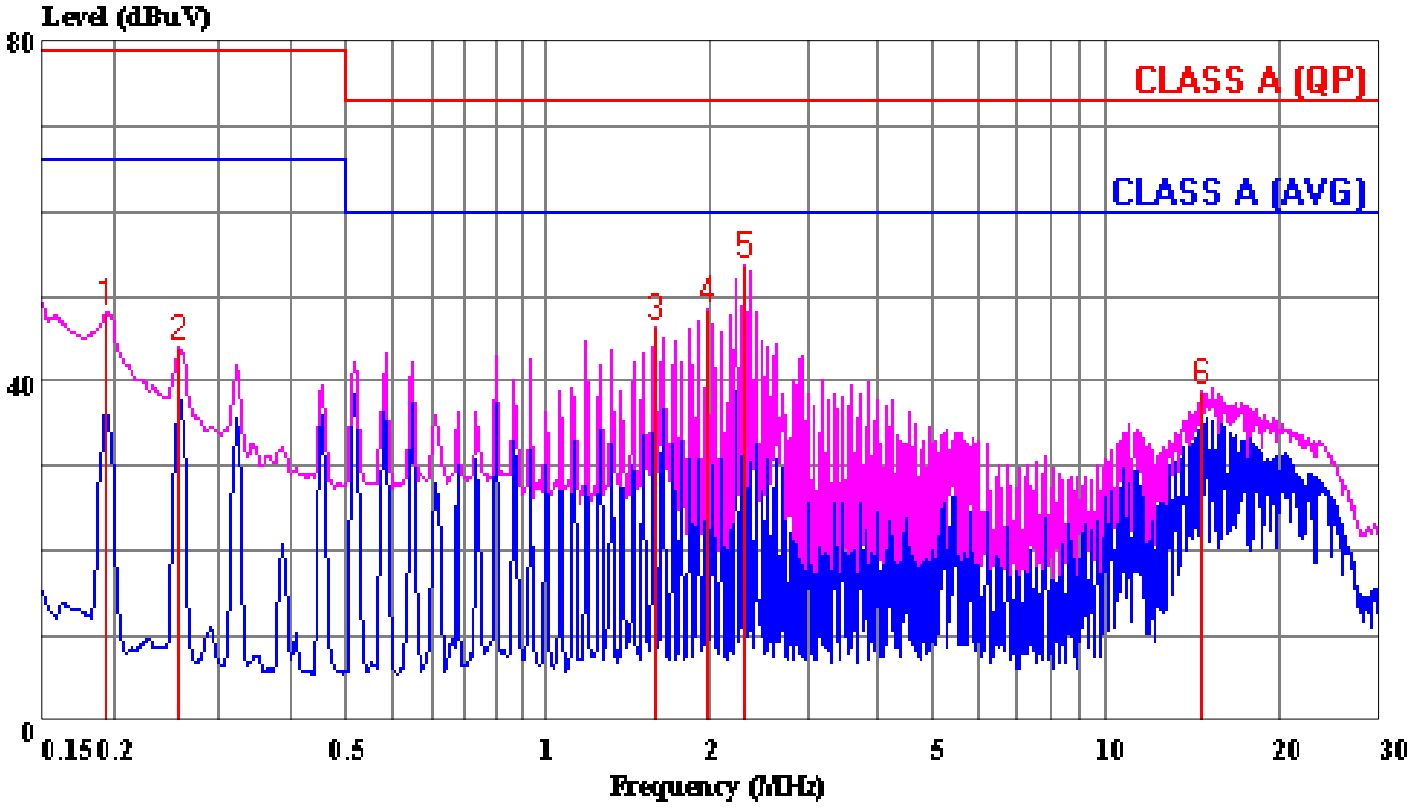

(Conducted)

Trace: 63 64 Ref Trace:

Condition: NEUTRAL
Report No. : 02E0031
Test Engr. : CLIFF LAI
Company : AAEON Technology Inc.
EUT : OPD-215ABT
Test Config : EUT/ ALL PERIPHERALS
Type of Test: EN 55022 CLASS A
Mode of Op. : 1024X768 (WORST)

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.192	48.19	0.02	48.21	79.00	-30.79	Peak
2	0.258	44.00	0.02	44.02	79.00	-34.98	Peak
3	1.689	46.23	0.12	46.35	73.00	-26.65	Peak
4	2.088	48.42	0.14	48.55	73.00	-24.45	Peak
5	2.409	53.43	0.15	53.58	73.00	-19.42	Peak
6	14.828	38.28	0.40	38.68	73.00	-34.32	Peak

COMPLIANCE Engineering Service, Inc.
FCC,VCCI,CISPR,CE
UL,CSA,TUV

No. 199, Chung Sheng Road,
Hsin Tien City, Taipei,
Taiwan, R.O.C.
Tel:02-2217-0894 Fax:02-2217-1254

Data#: 2 File#: 0031e.emi Date: 2002-03-29 Time: 11:36:52
E-Site

Condition: VERTICAL
Report No. : 02E0031
Test Engr. : CLIFF LAI
Company : AAEON Technology Inc.
EUT : OPD-215ABT
Test Config : EUT/ ALL PERIPHERALS
Type of Test: EN 55022 CLASS A
Mode of Op. : 800X600 (WORST)

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	110.965	46.60	-15.50	31.10	40.00	-8.90	Peak
2	147.950	45.30	-14.80	30.50	40.00	-9.50	Peak
3	222.034	47.90	-10.14	37.76	40.00	-2.24	QP
4	281.490	47.80	-7.46	40.34	47.00	-6.66	Peak
5	295.910	47.20	-7.24	39.96	47.00	-7.04	Peak
6	443.910	44.40	-3.88	40.52	47.00	-6.48	Peak
7	517.890	39.10	-2.66	36.44	47.00	-10.56	Peak
8	554.910	42.00	-1.69	40.31	47.00	-6.69	Peak
9	591.870	37.60	-0.81	36.79	47.00	-10.21	Peak
10	631.750	32.10	0.19	32.29	47.00	-14.71	Peak

COMPLIANCE Engineering Service, Inc.
FCC,VCCI,CISPR,CE
UL,CSA,TUV

No. 199, Chung Sheng Road,
Hsin Tien City, Taipei,
Taiwan, R.O.C.
Tel:02-2217-0894 Fax:02-2217-1254

Data#: 3 File#: 0031e.emi Date: 2002-03-29 Time: 11:51:57
E-Site

Condition: HORIZONTAL
Report No. : 02E0031
Test Engr. : CLIFF LAI
Company : AAEON Technology Inc.
EUT : OPD-215ABT
Test Config : EUT/ ALL PERIPHERALS
Type of Test: EN 55022 CLASS A
Mode of Op. : 800X600 (WORST)

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	135.010	47.80	-15.81	31.99	40.00	-8.01	Peak
2	151.880	50.60	-14.50	36.10	40.00	-3.90	Peak
3	222.260	39.40	-10.06	29.34	40.00	-10.66	Peak
4	283.500	35.40	-7.43	27.97	47.00	-19.03	Peak
5	291.620	39.20	-7.31	31.89	47.00	-15.11	Peak
6	301.290	42.80	-7.15	35.65	47.00	-11.35	Peak
7	445.510	28.70	-3.86	24.84	47.00	-22.16	Peak
8	553.530	29.10	-1.73	27.37	47.00	-19.63	Peak
9	631.720	31.00	0.19	31.19	47.00	-15.81	Peak