

Chapter

2

Quick Installation Guide



Notice:

The Quick Installation Guide is derived from Chapter 2 of user manual. For other chapters and further installation instructions, please refer to the user manual CD-ROM that came with the product.

Packing list

Before you begin installing your single board computer, please make sure that the following materials have been shipped:

- 1 x ETX-2600 EXT Carrier Board
- 1 x Quick Installation Guide
- 1 x Driver and Utility CD-ROM

2.1 Safety Precautions

Warning!




Always completely disconnect the power cord from your board whenever you are working on it. Do not make connections while the power is on, because a sudden rush of power can damage sensitive electronic components.

Caution!




Always ground yourself to remove any static charge before touching the board. Modern electronic devices are very sensitive to static electric charges. Use a grounding wrist strap at all times. Place all electronic components on a static-dissipative surface or in a static-shielded bag when they are not in the chassis

2.2 Location of Connectors and Jumpers

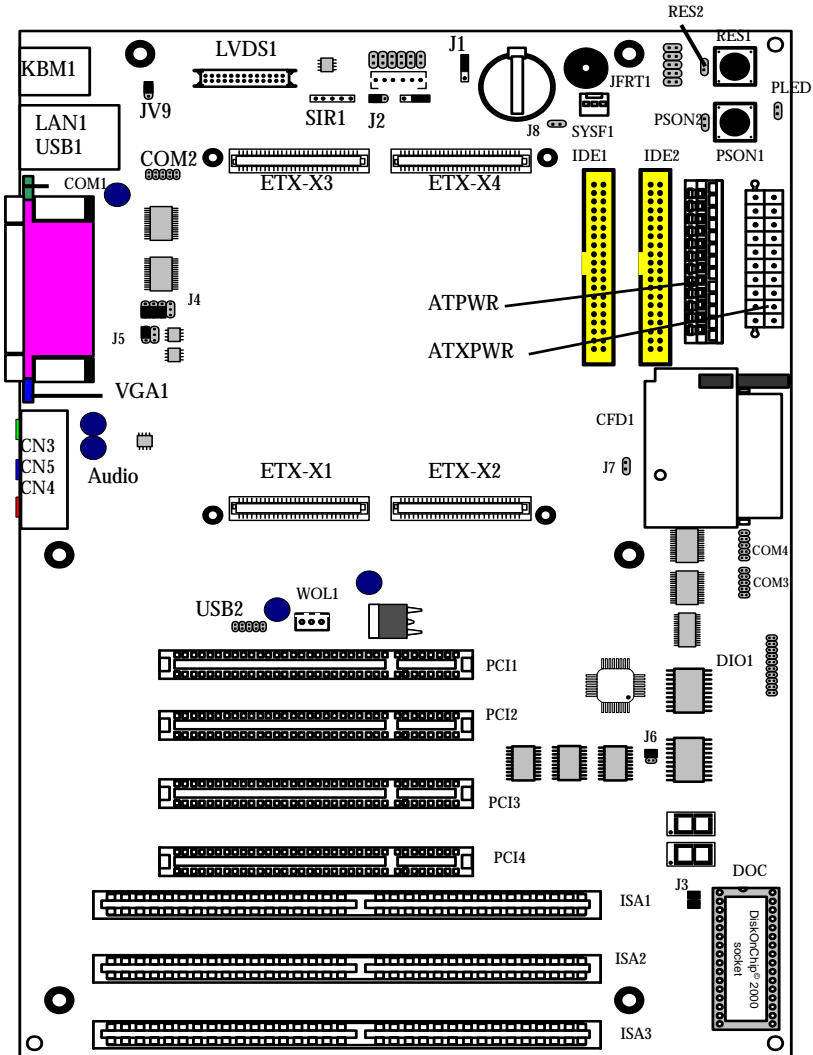

2.3 Mechanical Drawing

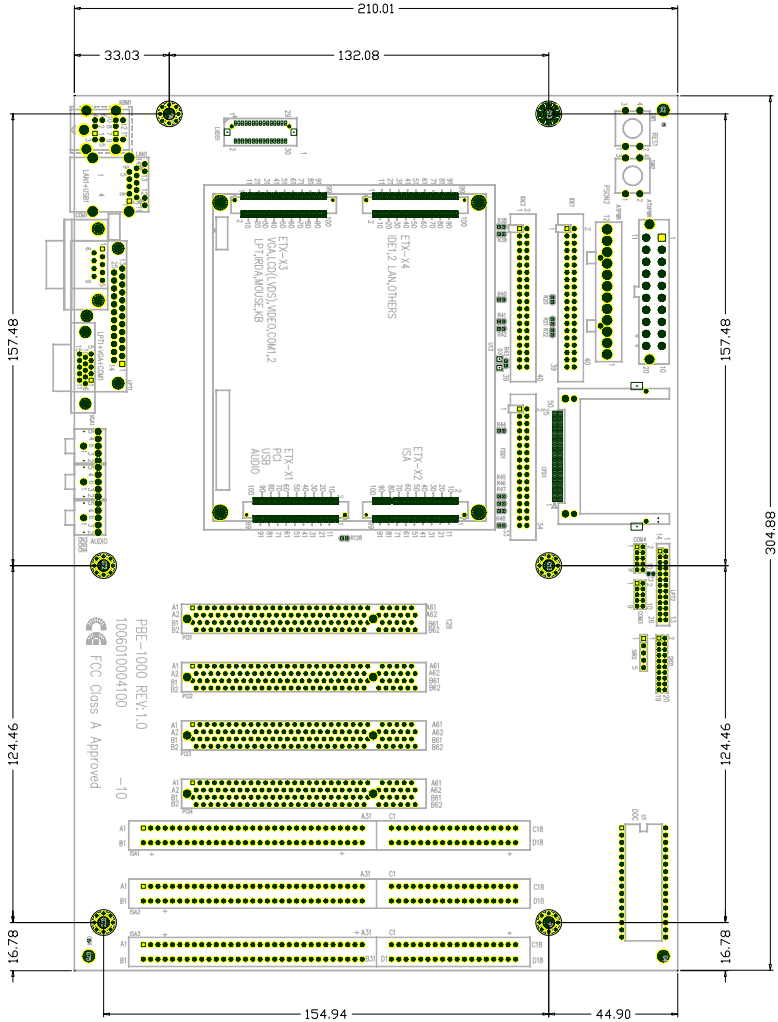

2.4 Specifications

General Specifications

❖ **ETX CPU Module socket**

Support the ETX-621 and ETX-622 CPU Module

❖ **Enhanced IDE**

Support 4 IDE Devices with Ultra DMA/100 mode

❖ **Parallel Port**

Support one SSP, ECP, and EPP mode bi-directional Parallel Port

❖ **Serial Port**

Support 4 COM

❖ **KB/Mouse Connector**

Keyboard/Mouse connector x 2

❖ **USB Connector**

4 USB ports

❖ **Flash Memory Interface**

❖ **CF Connector**

One CF socket supports Type I/II Compact Flash Card

❖ **DOC Socket**

One 32-pin DIP socket supports M-Systems DiskOnChip 2000 series

❖ **Expansion Interface**

Four 32-bit PCI Slots on Board

Three 16-bit ISA Slots on Board

❖ Other Feature

TV Out (NTSC , PAL) , LVDS 32-bit , Debug Port Disp ,
16-bit DIO , Wake On LAN

2.5 Jumper/Connector Quick Reference

Jumpers	Function
J1	Clear CMOS
J2	Watchdog Output
J3	DOC Base Address Select
J4	COM2 RS-232C/422/585 Select
J5	COM2 RS-232C/422/585 Select
J6	PORT80 Address Select
J7	CF IDE1 mode select (Master or Slave)
J8	IDE 100 or 33 mode select
JV9	LCD Voltage Select

Connectors

Lable	Function
VGA1	VGA Display Connector
LVDS1	Dual Channel LVDS Connector (DF13 30-pin)
TV1	TV-OUT Connector
IDE1	IDE Hard Drive Connector
IDE2	IDE Hard Drive Connector
CFD1	Compact Flash Connector
USB1	USB0~1 Connector

USB2	USB2~3 Connector
AUDIO	Audio Connector
SIR1	IrDA Connector
DIO1	Digital I/O Connector
KBM1	Keyboard and PS/2 Mouse Connector
LPT1	Parallel Port Connector
COM1	COM1 RS-232C Serial Port Connector
COM2	COM2 RS-232C/422/485 Serial Port Connector
COM3	COM3 RS-232C Serial Port Connector
COM4	COM4 RS-232C Serial Port Connector
ATPWR	AT Power Connector
ATXPWR	ATX Power Connector
SYSF1	CPU Fan Power Connector
LAN1	10/100 Base Ethernet Connector
DOC	Disk On Chip
PERSON1/2	Power Switch
RES1/2	Reset Switch
PLED	Power LED
JFRT1	Front Panel
WOL1	Wake On LAN
ETX-X1	PCI, USB, AUDIO
EXT-X2	ISA
ETX-X3	VGA, LCD (LVDS), VIDEO, COM1,2, LPT,

IrDA, Mouse, KB

ETX-X4 IDE1,2, LAN, Others

CMOS Jumper Settings

CMOS Operation (J1)

Type: J1: onboard 3-pin header

If the ETX-2600 refuses to boot due to inappropriate CMOS settings here is how to proceed to clear (reset) the CMOS to its default values.



CMOS Setup (J1)

J1

Normal Operation	1-2
Clear CMOS	2-3
Default setting	1-2

Watchdog Timer

Watchdog (J2)

Type: J1: onboard 3-pin header



Mode Setting (J2)

Watchdog Mode

J2

RESET	1-2
NMI	2-3
Disable Watchdog Timer	OFF
Default setting	1-2

DOC Address Select

DOC Address Select (J3)

Type: J3: onboard 2x2-pin header



Mode Setting (J3)

Based Address	1-2	3-4
D800	OFF	ON
D000	ON	OFF
Disable	OFF	OFF


Default setting D800

COM2 RS-232C/422/485 Select

COM2 Mode Select (J4, J5)

Type: J4: onboard 3x4-pin header

J5: onboard 3x2-pin header



Mode Setting (J4, J5)

COM2	J4	J5
RS-232C	1-2,4-5,7-8,10-11	1-2
RS-422	2-3,5-6,8-9,11-12	3-4
RS-485	2-3,5-6,8-9,11-12	5-6

Default setting RS-232C

PORT80 Address Select

PORT Address Select (J6)

Type: J6: onboard 2x2-pin header



Mode Setting (J6)

Port Address	1-2	3-4
80H	ON	ON
81H	OFF	ON
90H	ON	OFF
91H	OFF	OFF

Default setting 80H

LVDS Voltage Select

LVDS Voltage Select (JV9)

Type: JV9: onboard 3-pin header



Mode Setting (JV9)

Voltage	1-2	2-3
5V	ON	OFF
3.3V	OFF	ON
Disable	OFF	OFF

Default setting 3.3V

CF IDE1 Mode Select

CF IDE1 Mode Select (J7)

Type: onboard 2-pin header

Mode Setting (J7)

J7	Function
ON	CF is IDE1 Master
OFF	CF is IDE1 Slave

Default setting ON

IDE 100 or 33 Mode Select

IDE 100 or 33 Mode Select (J8)

Type: onboard 2-pin header

Mode Setting (J8)

J8	Function
ON	IDE supports Ultra DMA 100
OFF	IDE supports Ultra DMA 33

Default setting OFF

Note: If J8 is set to ON, CF and HDD can't exist at the same time.

IrDA Connector (SIR1)Connector: **SIR1**

Type: Onboard 5-pin header



Pin	Signal	Pin	Signal
1	+5V	2	NC
3	IRRX	4	GND
5	IRTX		

16-bit Digital I/O**16-bit General Purpose I/O (DIO1)**Connector: **DIO1**

Type: Onboard 20-pin header

Output Port I/O Based Address: 208hex

Input Port I/O Based Address : 200hex

Digital Output

Digital Input

Logic Level 0: 0.5V (max)

Logic Level 0: 0.8V (max)

Logic Level 1: 2.0V (min)

Logic Level 1: 2.0V (min)

Output Current per pin: ± 25 mA (max)

Pin Description		Pin Description	
1	DO0	2	DO1
3	DO2	4	DO3
5	DO4	6	DO5
7	DO6	8	DO7
9	GND	10	GND
11	DI0	12	DI1
13	DI2	14	DI3
15	DI4	16	DI5
17	DI6	18	DI7
19	+5V	20	+12V

* Note:

Output port: Pin1 ~ Pin8 <---> 208h~20Fh

Input port: Pin11~Pin18 <---> 200h~207h

LVDS DF13 30-pin Connector (LVDS1)


Pin	Signal	Pin	Signal
1	VDD	2	VDD
3	TX1CLK+	4	TX2CLK+
5	TX1CLK-	6	TX2CLK-
7	GND	8	GND
9	TX1D0+	10	TX2D0+

11	TX1D0-	12	TX2D0-
13	GND	14	GND
15	TX1D1+	16	TX2D1+
17	TX1D1-	18	TX2D1-
19	GND	20	GND
21	TX1D2+	22	TX2D2+
23	TX1D2-	24	TX2D2-
25	GND	26	GND
27	N.C	28	N.C
29	N.C	30	N.C

Switches and Indicators

Connector: **JFRT1**

Type: Onboard 10-pin header



Pin	Jumper	Description
1-2	PSON	ATX soft power switch
3-4	RES	reset function
5-6	ESMI	external SMI
7-8	HD	Hard Disk LED
9-10	SPKE	External speaker

ETX Connector

ETX1	1	GND	2
	3	PCICLK3	4
	5	GND	6
	7	PCICLK1	8
	9	REQ#3	10
	11	GNT#2	12
	13	REQ#2	14
	15	REQ#1	16
	17	GNT#0	18
	19	VCC	20
	21	SERIRQ	22
	23	AD0	24
	25	AD1	26
	27	AD4	28
	29	AD6	30
	31	CBE#0	32
	33	AD8	34
	35	GND	36
	37	AD10	38
	39	AD11	40
	41	AD12	42
	43	AD13	44
	45	AD14	46
	47	AD15	48
	49	CBE#1	50
	51	VCC	52
	53	PAR	54
	55	PERR#	56
	57	PME#	58
	59	LOCK#	60
	61	TRDY#	62
	63	IRDY#	64
	65	FRAME#	66
	67	GND	68
	69	AD16	70
	71	AD17	72
	73	AD19	74
	75	AD20	76
	77	AD22	78
	79	AD23	80
	81	AD24	82
	83	VCC	84
	85	AD25	86
	87	AD26	88
	89	AD27	90
	91	AD30	92
	93	PCIRST#	94
	95	INTR#C	96
	97	INTR#A	98
	99	GND	100
		GND	100
		PCICLK4	4
		GND	6
		PCICLK2	8
		GNT#3	10
		VCC3	12
		GNT#1	14
		VCC3	16
		N.C	18
		VCC	20
		REQ#0	22
		VCC3	24
		AD2	26
		AD3	28
		AD5	30
		AD7	32
		AD9	34
		GND	36
		AUXAL	38
		MIC	40
		AUXAR	42
		ASVCC	44
		SNDL	46
		ASGND	48
		SNDR	50
		VCC	52
		SERR#	54
		N.C	56
		USB2-	58
		DEVSEL#	60
		USB3-	62
		STOP#	64
		USB2+	66
		GND	68
		CBE#2	70
		USB3+	72
		AD18	74
		USB0-	76
		AD21	78
		USB1-	80
		CBE#3	82
		VCC	84
		AD26	86
		USB0+	88
		AD29	90
		USB1+	92
		AD31	94
		INTR#D	96
		INTR#B	98
		GND	100

ETX2	1	GND	GND	2
	3	SD14	SD15	4
	5	SD13	MASTER#	6
	7	SD12	DREQ7	8
	9	SD11	DACK#7	10
	11	SD10	DREQ6	12
	13	SD9	DACK#6	14
	15	SD8	DREQ5	16
	17	MEMW#	DACK#5	18
	19	MEMR#	DREQ0	20
	21	LA17	DACK#0	22
	23	LA18	IRQ14	24
	25	LA19	IRQ15	26
	27	LA20	IRQ12	28
	29	LA21	IRQ11	30
	31	LA22	IRQ10	32
	33	LA23	IO16#	34
	35	GND	GND	36
	37	SBHE#	M16#	38
	39	SA0	OSC	40
	41	SA1	BALE	42
	43	SA2	TC	44
	45	SA3	DACK#2	46
	47	SA4	IRQ3	48
	49	SA5	IRQ4	50
	51	VCC	VCC	52
	53	SA6	IRQ5	54
	55	SA7	IRQ6	56
	57	SA8	IRQ7	58
	59	SA9	SYSCLK	60
	61	SA10	REFCH#	62
	63	SA11	DREQ1	64
	65	SA12	DACK#1	66
	67	GND	GND	68
	69	SA13	DREQ3	70
	71	SA14	DACK#3	72
	73	SA15	IOR#	74
	75	SA16	IOW#	76
	77	SA18	SA17	78
	79	SA19	SMEMR#	80
	81	IOCHRDY	AEN	82
	83	VCC	VCC	84
	85	SD0	SMEMW#	86
	87	SD2	SD1	88
	89	SD3	NOWS#	90
	91	DREQ2	SD4	92
	93	SD5	IRQ9	94
	95	SD6	SD7	96
	97	IOCHK#	RSTDRV	98
	99	GND	GND	100

ETX3	1	GND	GND	2
	3	R	B	4
	5	HSY	G	6
	7	VSY	DDCK	8
	9	N.C/DE	DDDA	10
	11	LCD16/B0	LCD18/B2	12
	13	LCD17/B1	LCD19/B3	14
	15	GND	GND	16
	17	LCD13/G5	LCD15/VSYNC	18
	19	LCD12/G4	LCD14/HSYNC	20
	21	GND	GND	22
	23	LCD8/G0	LCD11/G3	24
	25	LCD9/G1	LCD10/G2	26
	27	GND	GND	28
	29	LCD4/R4	LCD8/B5	30
	31	LCD5/R5	LCD6/B4	32
	33	GND	GND	34
	35	LCD1/R1	LCD3/R3	36
	37	LCD0/R0	LCD2/R2	38
	39	VCC	VCC	40
	41	JILI_DAT	LTGIO0	42
	43	JILI_CLK	BLON#	44
	45	BIASON	DIGON	46
	47	COMP	Y	48
	49	SYNC	C	50
	51	LPT/FLPY#	N.C/SHFCLK	52
	53	VCC	GND	54
	55	STB#/I.C	AFD#/DENSEL	56
	57	I.C	PD7/N_C	58
	59	IRRX	ERR#/HDSEL#	60
	61	IRTX	PD6/MOT0	62
	63	RXD2	INIT#/DIR#	64
	65	GND	GND	66
	67	RTS#2	PD5/N.C	68
	69	DTR#2	SLIN#/STEP#	70
	71	DCD#2	PD4/DSKCHG#	72
	73	DSR#2	PD3/RDATA#	74
	75	CTS#2	PD2/WP#	76
	77	TXD#2	PD1/TRK0#	78
	79	RI#2	PD0/INDEX#	80
	81	VCC	VCC	82
	83	RXD1	ACK#/I.C	84
	85	RTS#1	BUSY#/I.C	86
	87	DTR#1	PE/WDATA#	88
	89	DCD#1	SLCT#/WGATE#	90
	91	DSR#1	MSCLK	92
	93	CTS#1	MSDAT	94
	95	TXD#1	KBCLK	96
	97	RI#1	KBDAT	98
	99	GND	GND	100

1	GND	GND	2
3	SV_SB	PWGIN	4
5	PS_ON	SPEAKER	6
7	PWRBTN#	BATT	8
9	KBINH	LILED	10
11	WDTRIG	ACTLED	12
13	ROMKBCS#	SPEEDLED	14
15	EXT_PRG	12CLK	16
17	VCC	VCC	18
19	OVCN#	GPCS#	20
21	EXTSMI#	12DAT	22
23	SMBCLK	SMBDAT	24
25	SIDE_CS3#	CPU_FAN	26
27	SIDE_CS1#	DASP_S	28
29	SIDE_A2	PIDE_CS3#	30
31	SIDE_A0	PIDE_CS1#	32
33	GND	GND	34
35	PDIAG_S	PIDE_A2	36
37	SIDE_A1	PIDE_A0	38
39	SIDE_INTRQ	PIDE_A1	40
41	N.C	N.C	42
43	SIDE_ACK#	PIDE_INTRQ	44
45	SIDE_RDY	PIDE_ACK#	46
47	SIDE_IOR#	PIDE_RDY	48
49	VCC	VCC	50
51	SIDE_IOW#	PIDE_IOR#	52
53	SIDE_DRQ	PIDE_IOW#	54
55	SIDE_D15	PIDE_DRQ	56
57	SIDE_D0	PIDE_D15	58
59	SIDE_D14	PIDE_D0	60
61	SIDE_D1	PIDE_D14	62
63	SIDE_D11	PIDE_D1	64
65	GND	GND	66
67	SIDE_D2	PIDE_D13	68
69	SIDE_12	PIDE_D2	70
71	SIDE_D3	PIDE_D12	72
73	SIDE_D11	PIDE_D3	74
75	SIDE_D4	PIDE_D11	76
77	SIDE_D10	PIDE_D4	78
79	SIDE_D5	PIDE_D10	80
81	VCC	VCC	82
83	SIDE_D9	PIDE_D5	84
85	SIDE_D6	PIDE_D9	86
87	SIDE_D8	PIDE_D6	88
89	-RI	LAN_WAKE	90
91	RXD-	PIDE_D8	92
93	RXD+	SIDE_D7	94
95	TXD-	PIDE_D7	96
97	TXD+	HDRST#	98
99	GND	GND	100