

# AIOT-QM

Supplier: POKI / box size: 312(L)\*257(W)\*197(H) mm

## Package Drop Test Report

Report NO: 15P030011



Summary	<p><input checked="" type="checkbox"/> <b>Pass</b></p> <p><input type="checkbox"/> <b>Fail</b> Note : There is/are ____ defect(s) not list in the report, please check it in the DTS Website.</p> <p><input type="checkbox"/> <b>Pass with Deviation</b></p> <p><b>Comment:</b> _____</p>
---------	---

Issue date

2015-09-11

Approval

KJ Wang

Test Engineer

Rex Chang

# Test item list

---

1. *Test item list* ----- 2
2. *Configuration of EUT* ----- 3
3. *Package drop test* ----- 4

## Testing Result

Num	Test item list	Result	Remark
1	Package drop test	Pass	



# Package Drop Test

**Test Date:** 09-11-2015

**Test Product:** AIOT-QM

**Test Site:** AAEON QE Dept.

**Test Standard:**

Reference ISTA PROJECT 1A

**Test Equipment:**

Drop Tester


KING DESIGN Co. LTD.

Model: KD-128A

Serial Number: UU110099190

**Test Condition:**

1. Test Phase: One corner. Three edges. Six face
2. Test Cycle: 1 Cycle
3. Test High: 76cm
4. Test Weight: 3.44Kg
5. Sample Package: 1unit in single-package.
6. Test Drawing:

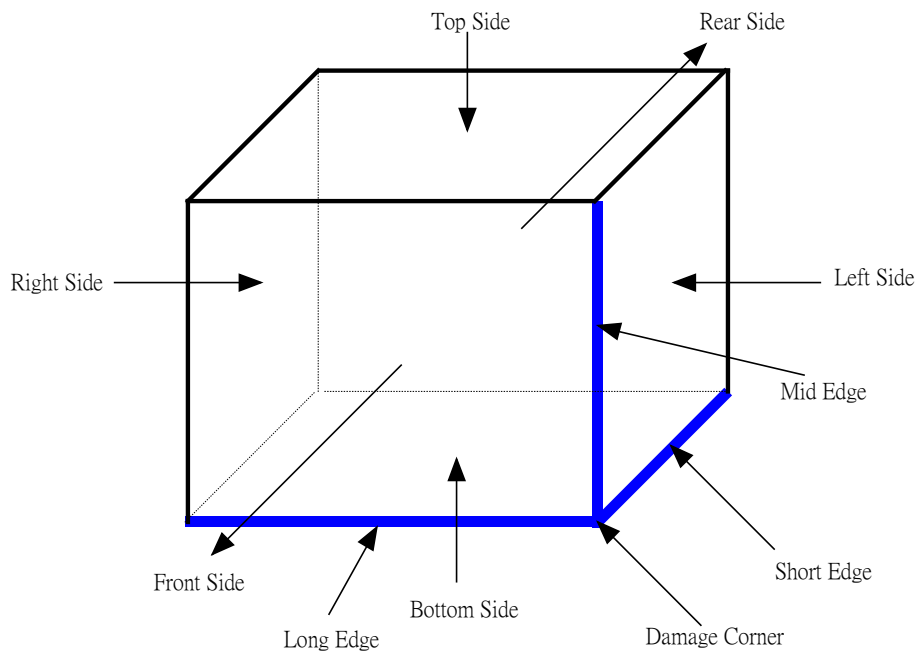

**Test Result:**

Packaging is not broken, system no structure deformation and function was working normally after drop test.