

FWS-7820

With 3.5" SATA HDD

Supplier: POKI

External carton size: 630 (L)*630 (W)*212 (H) mm

Internal carton size: 612 (L)*612 (W)*176 (H) mm

Package Drop Test Report

Report NO: 16I030015



Summary	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail Note : There is/are ____ defect(s) not list in the report, please check it in the DTS Website. <input type="checkbox"/> Pass with Deviation Comment: _____
---------	---

Tester by:	Peter Pan _____ Engineer	/	05/10/2016 _____ Date
Issued by:	Jerry Chen _____ Engineer	/	05/11/2016 _____ Date
Approval:	KJ Wang _____ Sr. Manager	/	05/11/2016 _____ Date


Test item list

1. *Test item list* ----- 2
2. *Configuration of EUT* ----- 2
3. *Package drop test* ----- 3

Testing Result

Num	Test item list	Result	Remark
1	Package drop test	Pass	

Photos After Test

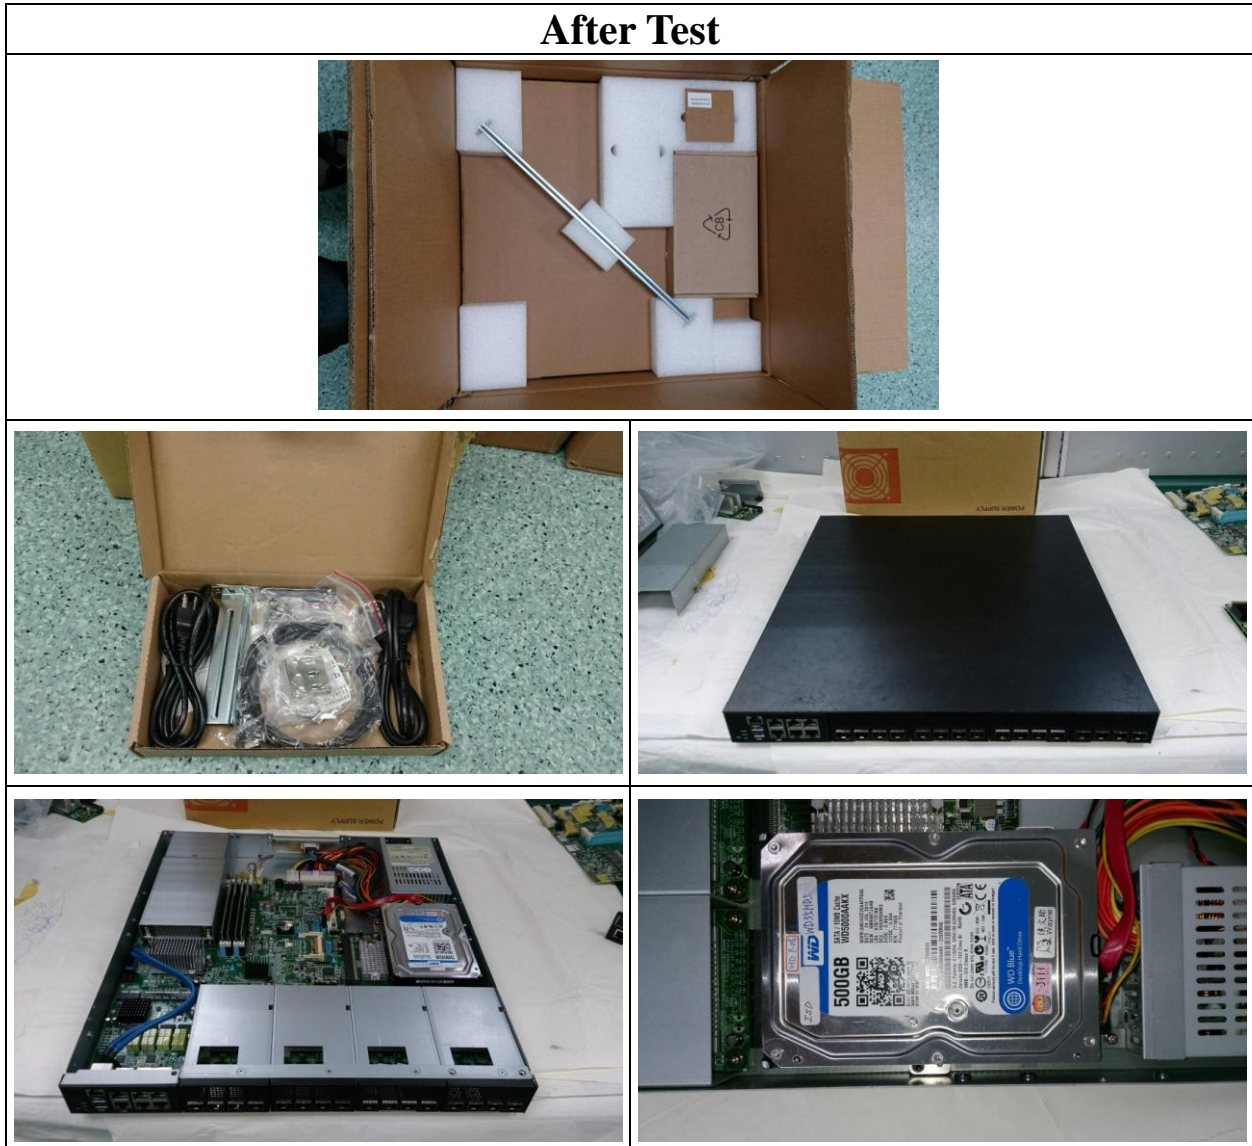

Package Drop Test

Test Date: 05-10-2016

Test Product: FWS-7820

Test Site: BOTH SQUERITY ENJRPRISE CONTAINER. ,TD

Test Standard:

Reference ISTA PROJECT 1A

Test Equipment:

Drop Tester


KING DESIGN Co. LTD.

Model: KD-128A

Serial Number: UU110099185

Test Condition:

1. Test Phase: One corner. Three edges. Six face
2. Test Cycle: 1 Cycle
3. Test Height: 61cm
4. Test Weight: 15 Kg
5. Sample Package: 1unit in double-package.
6. Test Drawing:

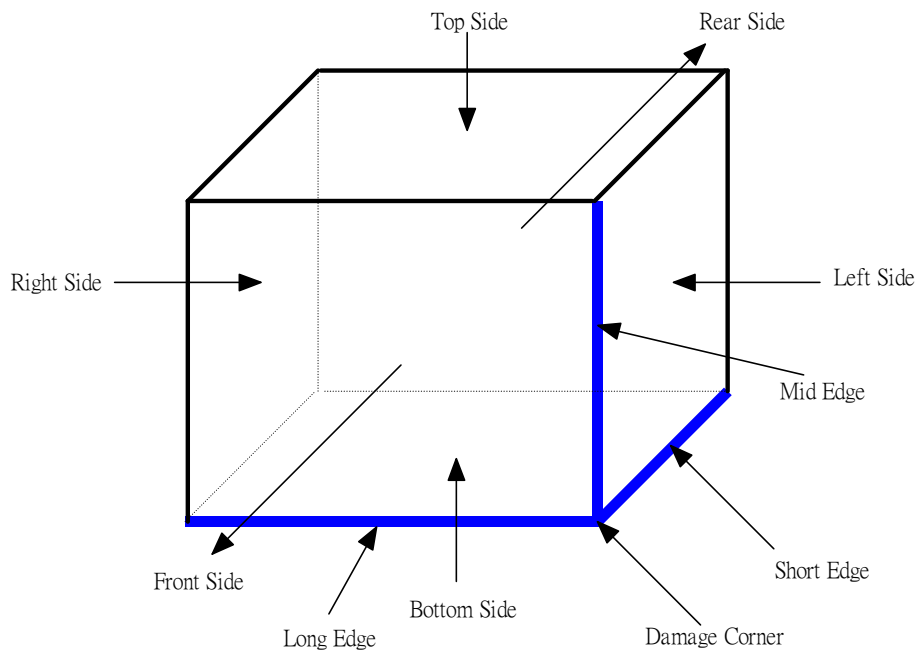

Test Result:

Packaging is not broken, main board no structure deformation and function was working normally after drop test.