

GENE-LN05

Intel® Atom™N450/D510 Processors

Intel® 82567V & 82583V

for 10/100/1000Mbps

2 SATA2, 1 CompactFlash™

6 COM, 7 USB2.0, Digital I/O

2 Mini Card, LPC Bus

Copyright Notice

This document is copyrighted, 2010. All rights are reserved. The original manufacturer reserves the right to make improvements to the products described in this manual at any time without notice.

No part of this manual may be reproduced, copied, translated, or transmitted in any form or by any means without the prior written permission of the original manufacturer. Information provided in this manual is intended to be accurate and reliable. However, the original manufacturer assumes no responsibility for its use, or for any infringements upon the rights of third parties that may result from its use.

The material in this document is for product information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, AAEON assumes no liabilities resulting from errors or omissions in this document, or from the use of the information contained herein.

AAEON reserves the right to make changes in the product design without notice to its users.

Acknowledgments

All other products' name or trademarks are properties of their respective owners.

- Award is a trademark of Award Software International, Inc.
- CompactFlash™ is a trademark of the Compact Flash Association.
- Intel®, Atom™ are trademarks of Intel® Corporation.
- Microsoft Windows® is a registered trademark of Microsoft Corp.
- ITE is a trademark of Integrated Technology Express, Inc.
- IBM, PC/AT, PS/2, and VGA are trademarks of International Business Machines Corporation.
- SoundBlaster is a trademark of Creative Labs, Inc.

All other product names or trademarks are properties of their respective owners.

Packing List

Before you begin installing your card, please make sure that the following materials have been shipped:

- 1700060157 Keyboard & Mouse Cable
- CD-ROM for manual (in PDF format) and drivers
- GENE-LN05

If any of these items should be missing or damaged, please contact your distributor or sales representative immediately.

Contents

Chapter 1 General Information

1.1 Introduction.....	1-2
1.2 Features	1-3
1.3 Specifications	1-4

Chapter 2 Quick Installation Guide

2.1 Safety Precautions	2-2
2.2 Location of Connectors & Jumpers	2-3
2.3 Mechanical Drawing	2-5
2.4 List of Jumpers	2-7
2.5 List of Connectors	2-7
2.6 Setting Jumpers	2-9
2.7 Touch Screen 4/5/8-wire Mode Selection (JP1)	2-10
2.8 AT/ATX Power Mode Selection (JP2)	2-10
2.9 COM2 RI/+5V/+12V Selection (JP3).....	2-10
2.10 Clear CMOS (JP4)	2-10
2.11 LVDS Inverter/ Backlight Bias/PWM Mode Selection (JP5).....	2-10
2.12 LVDS Operating Voltage Selection (JP6)	2-11
2.13 LVDS Inverter/ Backlight Voltage Selection (JP7) ..	2-11
2.14 CPU Fan Connector (CN1)	2-11
2.15 +5VSB Output w/ SMBUS (CN2)	2-11

2.16 External +5VSB Input (CN3)	2-12
2.17 LPC Expansion I/F (CN4).....	2-12
2.18 SATA Port #1 (CN5).....	2-12
2.19 SATA Port #2 (CN6).....	2-13
2.20 External 5V Input (CN7)	2-13
2.21 External 12V Input (CN8).....	2-13
2.22 Touch Screen Connector (CN9).....	2-14
2.23 +5V Output For SATA HDD (CN10).....	2-14
2.24 Front Panel (CN11)	2-14
2.25 COM Port #6 (CN13).....	2-15
2.26 USB Port #7 (CN14).....	2-15
2.27 COM Port #5 (CN15).....	2-15
2.28 USB Port #6 (CN16).....	2-15
2.29 USB Port #5 (CN17).....	2-16
2.30 COM Port #4 (CN18).....	2-16
2.31 USB Port #4 (CN19).....	2-16
2.32 USB Port #3 (CN20).....	2-17
2.33 COM Port #3 (CN21).....	2-17
2.34 COM Port #2 (CN22).....	2-17
2.35 Audio Line In/Out and MIC Connector (CN23)	2-18
2.36 RJ-45 Ethernet #2 (CN24)	2-18
2.37 RJ-45 Ethernet #1 (CN25)	2-19
2.38 Digital I/O Connector (CN26)	2-19
2.39 Parallel Port (CN27)	2-20
2.40 LVDS Inverter/ Backlight Connector (CN28).....	2-21

2.41 18-bit LVDS Output (CN29)	2-21
2.42 USB Port 1 & 2 (CN30)	2-22
2.43 PS/2 Keyboard & Mouse (CN31)	2-22
2.44 COM Port #1 (CN32).....	2-22
2.45 CRT Display Connector (CN33).....	2-22
2.46 SIM Card Socket (CN34)	2-23
2.47 CompactFlash Disk (CFD1)	2-23
2.48 Mini-Card Slot #1 (PCIE1).....	2-24
2.49 Mini-Card Slot #2 (PCIE2).....	2-25
2.50 DDR2 SODIMM Slot (DIMM1)	2-26

Chapter 3 Award BIOS Setup

3.1 System Test and Initialization.	3-2
3.2 Award BIOS Setup	3-3

Chapter 4 Driver Installation

4.1 Installation	4-3
------------------------	-----

Appendix A Programming The Watchdog Timer

A.1 Programming	A-2
A.2 W83627DHG Watchdog Timer Initial Program.....	A-7

Appendix B I/O Information

B.1 I/O Address Map	B-2
B.2 1 st MB Memory Address Map	B-4
B.3 IRQ Mapping Chart.....	B-5
B.4 DMA Channel Assignments.....	B-5

Appendix C Mating Connector

C.1 List of Mating Connectors and Cables..... C-2

Chapter

1

**General
Information**

1.1 Introduction

AAEON, a leading embedded boards manufacturer, is pleased to announce the debut of their new generation 3.5" SubCompact Board—GENE-LN05. The GENE-LN05 is a cutting-edge product that provides high performance and low power consumption in the embedded market.

GENE-LN05 adopts the latest Intel® Atom processors and the system memory is deployed with SODIMM DDR2 667/800 up to 2GB. In addition, Intel® 82567V & 82583V supports two 10/100/100Base-TX that allows faster network connections. This model applies two Mini Card and LPC Bus expansions. Moreover, two SATA2 and one Type2 CompactFlash™ storages are configured on the GENE-LN05. In addition to the diverse storages, GENE-LN05 also equips seven USB2.0, six COM, one keyboard/mouse ports for flexible I/O expansions. There are no more worries about installing many necessary devices to complete the functions of your system.

The display of GENE-LN05 supports CRT/LCD simultaneous/ dual view displays and 18-bit single channel LVDS. This brand new SubCompact board is developed to cater to the requirements of Automation, Medical, ticket machine, transportation, gaming, KIOSK, and POS/POI applications.

1.2 Features

- Intel® Atom™ N450/D510 Processors Up To 1.66 GHz
- Intel® ICH8M
- SODIMM DDR2 667/800, Max. 2 GB
- Gigabit Ethernet x 2
- VGA, 18-bit Single Channel LVDS LCD
- 2CH HD Audio
- SATA2 x 2, CompactFlash™ x 1
- USB 2.0 x 7, COM x 6, Parallel x 1, 8-bit Digital I/O
- Onboard 4/5/8-wire Resistive Touch Screen Controller
- Mini Card x 2
- +5V or +12V Only Operation
- Onboard Trusted Platform Module (Optional)

1.3 Specifications

System

- Processor Intel® Atom™ N450/D510 1.66GHz Processors
- System Memory 200-pin DDR2 SODIMM x 1, Max. 2GB (DDR2 667/800)
- Chipset Intel® ICH8M
- I/O Chipset Nuvoton W83627DHG-P, Fintek F81216DG
- Ethernet Intel® 82567V & 82583V, 10/100/1000Base-TX, RJ-45 x 2
- BIOS AMI Plug & Play SPI BIOS – 4Mb Flash
- Wake On LAN Yes
- Watchdog Timer Generates a time-out system reset
- H/W Monitor Chipset Supports power supply voltages and temperature monitoring
- Expansion Interface Mini Card x 2, LPC Bus
- Trusted Platform Module (TPM) Infineon SLB 9635 TT 1.2 (Optional)
- Battery Lithium battery
- Power Requirement +5V or +12V, AT/ATX

- Board Size 5.75”(L) x 4”(W) (146mm x 101.6mm)

- Gross Weight 0.88 lb (0.4 kg)
- Operating Temperature 32°F~ 140°F (0°C ~ 60°C)
- Storage Temperature -40°F~ 176°F (-40°C ~ 80°C)
- Operating Humidity 0%~90% relative humidity, non-condensing

Display: Supports CRT/LCD simultaneous/dual view displays

- Chipset Intel® N450/D510 integrated
- Memory Shared system memory up to 384 MB/ DVMT4.0
- Resolution Up to 1280x1024 for N450;
Up to 1920x1440 for D510
- LCD Interface 18-bit single channel LVDS

I/O

- Storage SATA2 x 2,
Type2 CompactFlash™ x 1
- Serial Port RS-232 x 5, RS-232/422/485
(auto flow) x 1
- Parallel Port SPP/EPP/ECP x 1
- USB Port USB2.0 x 7
- PS/2 Port Keyboard x 1, Mouse x 1
- Digital I/O Supports 8-bit (Programmable)
- Audio Line-in, Line-out, Mic-in

- Touch Screen Supports 4/5/8-wire resistive touch screen

Chapter

2

**Quick
Installation
Guide**

2.1 Safety Precautions

Warning!


Always completely disconnect the power cord from your board whenever you are working on it. Do not make connections while the power is on, because a sudden rush of power can damage sensitive electronic components.

Caution!


Always ground yourself to remove any static charge before touching the board. Modern electronic devices are very sensitive to static electric charges. Use a grounding wrist strap at all times. Place all electronic components on a static-dissipative surface or in a static-shielded bag when they are not in the chassis

2.2 Location of Connectors and Jumpers

Component Side

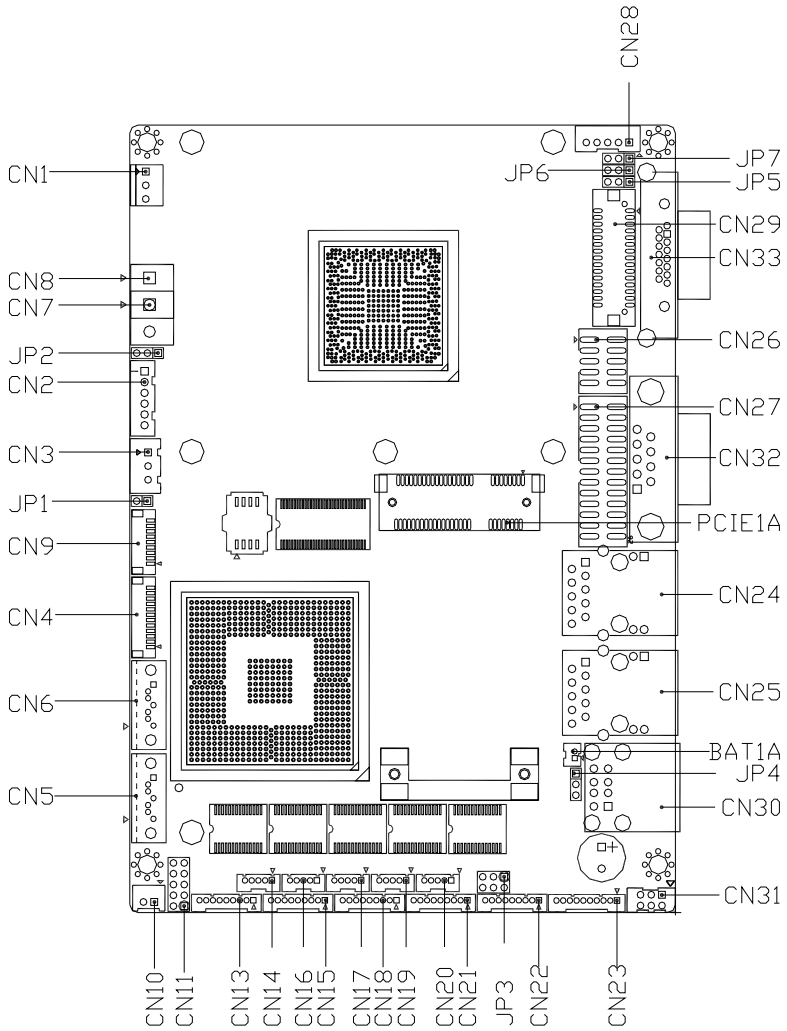


Solder Side

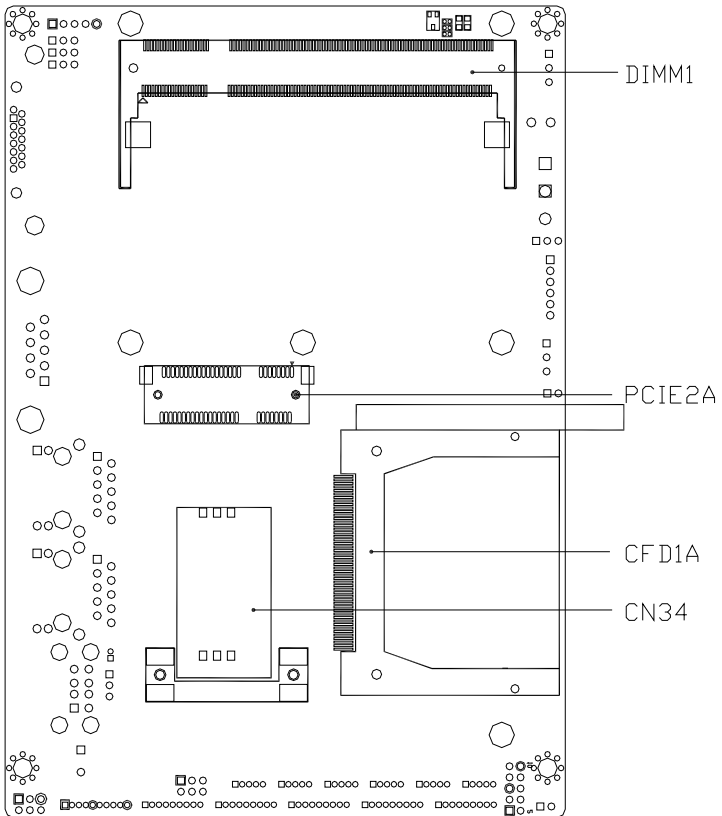


2.3 Mechanical Drawing

Component Side

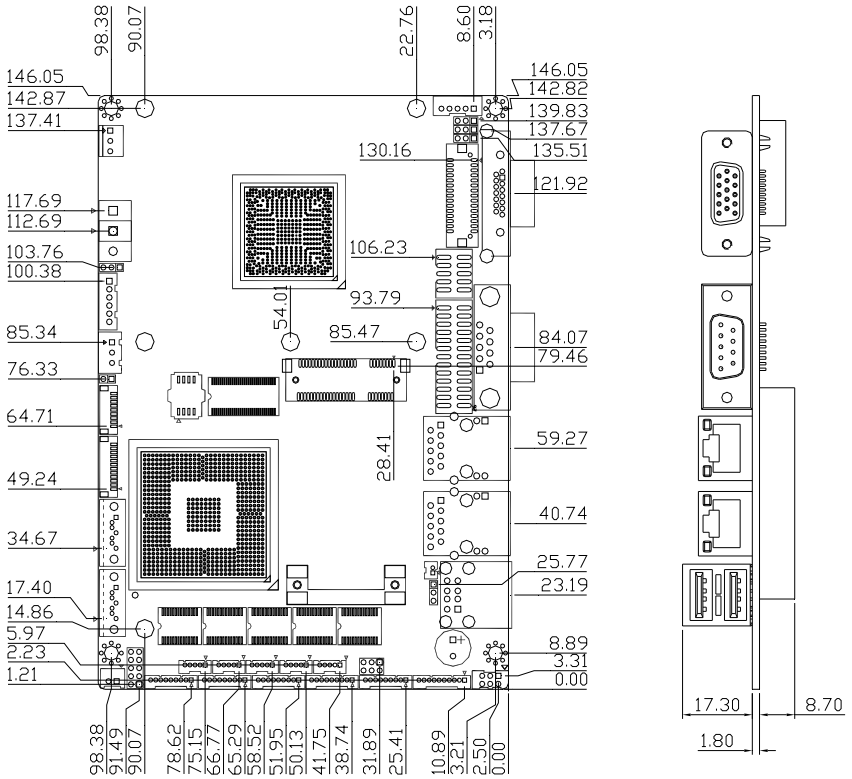

Solder Side

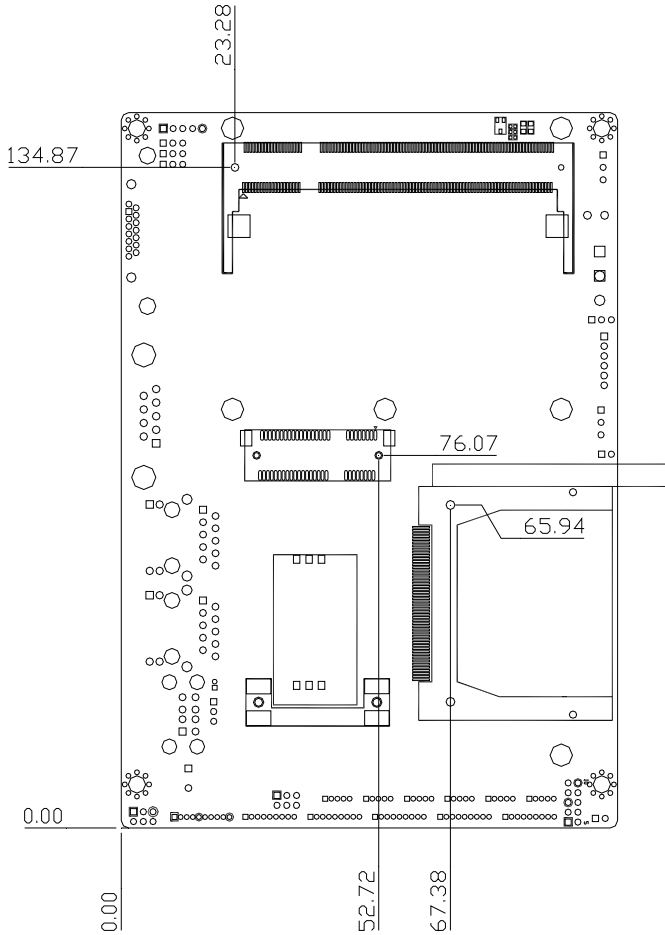

2.4 List of Jumpers

The board has a number of jumpers that allow you to configure your system to suit your application.

The table below shows the function of each of the board's jumpers:

Label	Function
JP1	Touch Screen 4/5/8-wire Mode Selection
JP2	AT/ATX Power Mode Selection
JP3	COM2 RI/+5/+12V Selection
JP4	Clear CMOS
JP5	LVDS Inverter/ Backlight Bias/PWM Mode Selection
JP6	LVDS Operating Voltage Selection
JP7	LVDS Inverter/ Backlight Voltage Selection

2.5 List of Connectors

The board has a number of connectors that allow you to configure your system to suit your application. The table below shows the function of each board's connectors:

Label	Function
CN1	CPU FAN
CN2	+5VSB Output w/ SMBus
CN3	External +5VSB Input
CN4	LPC Expansion I/F
CN5	SATA Port #1
CN6	SATA Port #2
CN7	External 5V Input (depend on power input configuration)
CN8	External 12V Input (depend on power input configuration)
CN9	Touch Screen Connector


CN10	+5V Output for SATA HDD using
CN11	Front Panel
CN13	COM Port #6
CN14	USB Port #7
CN15	COM Port #5
CN16	USB Port #6
CN17	USB Port #5
CN18	COM Port #4
CN19	USB Port #4
CN20	USB Port #3
CN21	COM Port #3
CN22	COM Port #2
CN23	Audio Line In/Out and MIC Connector
CN24	RJ-45 Ethernet #2
CN25	RJ-45 Ethernet #1
CN26	Digital I/O
CN27	Parallel Port
CN28	LVDS Inverter/ Backlight Connector
CN29	18-bit LVDS Output
CN30	USB Port #1 and #2
CN31	PS/2 Keyboard & Mouse
CN32	COM Port #1
CN33	Analog CRT Display
CN34	SIM Card Socket

CFD1	Compact Flash Disk
PCIE1	Mini-Card Slot #1
PCIE2	Mini-Card Slot #2
DIMM1	DDR2 SODIMM Slot

2.6 Setting Jumpers

You configure your card to match the needs of your application by setting jumpers. A jumper is the simplest kind of electric switch. It consists of two metal pins and a small metal clip (often protected by a plastic cover) that slides over the pins to connect them. To “close” a jumper you connect the pins with the clip.

To “open” a jumper you remove the clip. Sometimes a jumper will have three pins, labeled 1, 2 and 3. In this case you would connect either pins 1 and 2 or 2 and 3.

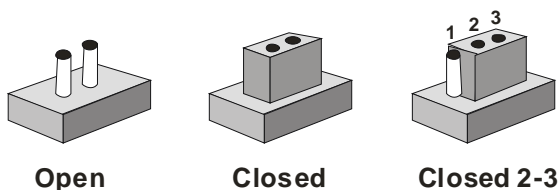

A pair of needle-nose pliers may be helpful when working with jumpers.

If you have any doubts about the best hardware configuration for your application, contact your local distributor or sales representative before you make any change.

Generally, you simply need a standard cable to make most connections.

2.7 Touch Screen 4/5/8-wire Mode Selection (JP1)

JP1	Function
1-2 Closed	4/8-wire (Default)
1-2 Open	5-wire

2.8 AT/ATX Power Mode Selection (JP2)

JP2	Function
1-2	AT (Default)
2-3	ATX

2.9 COM2 RI/+5V/+12V Selection (JP3)

Note: The max. rating of JP3 is 5V @ 1A, 12V @ 500mA

JP3	Function
1-2	+12V (Only for +12V power input model)
3-4	+5V
5-6	RI (Default)

2.10 Clear CMOS (JP4)

JP4	Function
1-2	Normal (Default)
2-3	Clear CMOS

2.11 LVDS Inverter/ Backlight Bias/PWM Mode Selection (JP5)

JP5	Function
1-2	Bias (Default)
2-3	PWM Control

2.12 LVDS Operating Voltage Selection (JP6)

JP6	Function
1-2	+5V
2-3	+3.3V (Default)

2.13 LVDS Inverter/ Backlight Voltage Selection (JP7)

JP7	Function
1-2	+12V (Only for +12V power input model)
2-3	+5V (Default)

2.14 CPU Fan Connector (CN1)

Pin	Signal
1	Ground
2	+5 Volt. (Optional) / +12 Volt.
3	FAN Sense

2.15 +5VSB Output w/ SMBUS (CN2)

Pin	Signal
1	SMBDATA
2	Ground
3	SMBCLK
4	Ground
5	PSON#
6	+5 Volt. Standby

2.16 External +5VSB Input (CN3)

Pin	Signal
1	PSON#
2	Ground
3	+5 Volt. Standby

2.17 LPC Expansion I/F (CN4)

Pin	Signal
1	LAD0
2	LAD1
3	LAD2
4	LAD3
5	+3.3 Volt.
6	LFRAME#
7	LRESET#
8	Ground
9	LPC_CLK
10	LDRQ#0
11	LDRQ#1
12	SERIRQ

2.18 SATA Port #1 (CN5)

Pin	Signal
1	Ground
2	TX0+
3	TX0-
4	Ground

5	RX0-
6	RX0+
7	Ground

2.19 SATA Port #2 (CN6)

Pin	Signal
1	Ground
2	TX1+
3	TX1-
4	Ground
5	RX1-
6	RX1+
7	Ground

2.20 External 5V Input (CN7)

DC Terminal

Pin	Signal
1	Ground
2	+5 Volt.

2.21 External 12V Input (CN8)

DC Terminal

Pin	Signal
1	+12 Volt.
2	Ground

2.22 Touch Screen Connector (CN9)

Pin	8-wire	5-wire	4-wire
1	Ground	Ground	Ground
2	Top Excite	UL(Y)	Top
3	Bottom Excite	UR(H)	Bottom
4	Left Excite	LL(L)	Left
5	Right Excite	LR(X)	Right
6	Top Sense	SENSE	N/C
7	Bottom Sense	N/C	N/C
8	Left Sense	N/C	N/C
9	Right Sense	N/C	N/C

2.23 +5V Output For SATA HDD (CN10)

Note: The max. rating of CN10 is 5V@ 1A

Pin	Signal
1	+5 Volt.
2	Ground

2.24 Front Panel (CN11)

Pin	Signal
(-) 1-2 (+)	ATX Power-on Button
(-) 3-4 (+)	HDD Active LED
(-) 5-6 (+)	External Speaker
(-) 7-8 (+)	Power LED
(-) 9-10 (+)	System Reset Button

2.25 COM Port #6 (CN13)

Pin	Signal	Pin	Signal
1	DCDF	2	DSRF
3	RXF	4	RTSF
5	TXF	6	CTSF
7	DTRF	8	RIF
9	Ground	10	N/C

2.26 USB Port #7 (CN14)

Pin	Signal
1	+5 Volt. Standby
2	Data6-
3	Data6+
4	Ground
5	Ground

2.27 COM Port #5 (CN15)

Pin	Signal	Pin	Signal
1	DCDE	2	DSRE
3	RXE	4	RTSE
5	TXE	6	CTSE
7	DTRE	8	RIE
9	Ground	10	N/C

2.28 USB Port #6 (CN16)

Pin	Signal
1	+5 Volt. Standby

2	Data5-
3	Data5+
4	Ground
5	Ground

2.29 USB Port #5 (CN17)

Pin	Signal
1	+5 Volt. Standby
2	Data4-
3	Data4+
4	Ground
5	Ground

2.30 COM Port #4 (CN18)

Pin	Signal	Pin	Signal
1	DCDD	2	DSRD
3	RXD	4	RTSD
5	TXD	6	CTSD
7	DTRD	8	RID
9	Ground	10	N/C

2.31 USB Port #4 (CN19)

Pin	Signal
1	+5 Volt. Standby
2	Data3-
3	Data3+
4	Ground
5	Ground

2.32 USB Port #3 (CN20)

Pin	Signal
1	+5 Volt. Standby
2	Data2-
3	Data2+
4	Ground
5	Ground

2.33 COM Port #3 (CN21)

Pin	Signal	Pin	Signal
1	DCDC	2	DSRC
3	RXC	4	RTSC
5	TXC	6	CTSC
7	DTRC	8	RIC
9	Ground	10	N/C

2.34 COM Port #2 (CN22)

RS-232 Mode

Pin	Signal	Pin	Signal
1	DCDB	2	DSRB
3	RXB	4	RTSB
5	TXB	6	CTSB
7	DTRB	8	RIB / +5 Volt. / (+12 Volt.)
9	Ground	10	N/C

RS-422 Mode

Pin	Signal	Pin	Signal
1	TXD-	2	N/C

SubCompact Board**GENE-LN05**

3	RXD+	4	N/C
5	TXD+	6	N/C
7	RXD-	8	N/C / +5 Volt. / (+12 Volt.)
9	Ground	10	N/C

RS-485 Mode

Pin	Signal	Pin	Signal
1	TXD-	2	N/C
3	N/C	4	N/C
5	TXD+	6	N/C
7	N/C	8	N/C / +5 Volt. / (+12 Volt.)
9	Ground	10	N/C

3.35 Audio Line In/Out and MIC Connector (CN23)

Pin	Signal
1	MIC_L
2	MIC_R
3	Ground
4	Line IN_L
5	Line IN_R
6	Ground
7	Line OUT_L
8	Ground
9	Line OUT_R
10	+5 Volt.

2.36 RJ-45 Ethernet #2 (CN24)

Pin	Signal	Pin	Signal
R1	MDIO0+	R2	MDIO0-

R3	MDIO1+	R4	MDIO1-
R5	TCD0	R6	TCD1
R7	MDIO2+	R8	MDIO2-
R9	MDIO3+	R10	MDIO3-
L1	SPD100_LED	L2	SPD1K_LED
L3	ACT_LED	L4	+3.3 Volt.

2.37 RJ-45 Ethernet #1 (CN25)

Pin	Signal	Pin	Signal
R1	GPHY_MDIO0+	R2	GPHY_MDIO0-
R3	GPHY_MDIO1+	R4	GPHY_MDIO1-
R5	TCD0	R6	TCD1
R7	GPHY_MDIO2+	R8	GPHY_MDIO2-
R9	GPHY_MDIO3+	R10	GPHY_MDIO3-
L1	SPD100_LED	L2	SPD1K_LED
L3	ACT_LED	L4	+3.3 Volt.

2.38 Digital I/O Connector (CN26)

Note: The max. rating of Pin 1 ~ Pin 8 is 3.3V@8mA
The max. rating of Pin 9 is 3.3V@0.5A

This connector offers 4-pair of digital I/O functions .

BIOS using the I2C Bus to read/write internal DIO registers and the Serial Bus address is 0x6E.

The pin definitions are illustrated below:

Pin	Signal	Pin	Signal
1	Port 1	2	Port 2
3	Port 3	4	Port 4
5	Port 5	6	Port 6
7	Port 7	8	Port 8

9	+3.3 Volt.	10	Ground
---	------------	----	--------

BIOS Setting (I2C address)	Connector Definition	Address(Register)		F75111 GPIO Setting
		Output	Input	
Port 1 @6Eh	Pin 1	21h/Bit 0	22h/Bit 0	U67 Pin 6 (GPIO 20)
Port 2 @6Eh	Pin 2	21h/Bit 1	22h/Bit 1	U67 Pin 7 (GPIO 21)
Port 3 @6Eh	Pin 3	21h/Bit 2	22h/Bit 2	U67 Pin 8 (GPIO 22)
Port 4 @6Eh	Pin 4	21h/Bit 3	22h/Bit 3	U67 Pin 24(GPIO 23)
Port 5 @6Eh	Pin 5	21h/Bit 4	22h/Bit 4	U67 Pin 23(GPIO 24)
Port 6 @6Eh	Pin 6	21h/Bit 5	22h/Bit 5	U67 Pin 22(GPIO 25)
Port 7 @6Eh	Pin 7	21h/Bit 6	22h/Bit 6	U67 Pin 21(GPIO 26)
Port 8 @6Eh	Pin 8	21h/Bit 7	22h/Bit 7	U67 Pin 20(GPIO 27)

2.39 Parallel Port (CN27)

Pin	Signal	Pin	Signal
1	STB	2	AFD#
3	D0	4	ERROR#
5	D1	6	PINIT#
7	D2	8	SLIN#
9	D3	10	Ground
11	D4	12	Ground
13	D5	14	Ground
15	D6	16	Ground
17	D7	18	Ground
19	ACK#	20	Ground
21	BUSY	22	Ground
23	PE	24	Ground

25	SLCT	26	N/C
----	------	----	-----

2.40 LVDS Inverter/ Backlight Connector (CN28)

Note: The max. rating of CN28 is 5V@ 1.5A, 12V @ 800mA

Pin	Signal
1	+5 Volt. / +12 Volt.
2	Brightness Control
3	Ground
4	Ground
5	Backlight Enable (Controlled by CH7308C)

2.41 18-bit LVDS Output (CN29)

Pin	Signal	Pin	Signal
1	Back-Light Enable	2	Back-Light Control
3	LCD Volt.	4	Ground
5	LA_CLK#	6	LA_CLK
7	LCD Volt.	8	Ground
9	LA_DATA#_0	10	LA_DATA_0
11	LA_DATA#_1	12	LA_DATA_1
13	LA_DATA#_2	14	LA_DATA_2
15	N/C	16	N/C
17	N/C	18	N/C
19	N/C	20	N/C
21	N/C	22	N/C
23	N/C	24	N/C
25	N/C	26	N/C
27	LCD Volt.	28	Ground
29	N/C	30	N/C

2.42 USB Port 1 & 2 (CN30)

Pin	Signal	Pin	Signal
1	+5 Volt. Standby	5	+5 Volt. Standby
2	Data0-	6	Data1-
3	Data0+	7	Data1+
4	Ground	8	Ground

2.43 PS/2 Keyboard & Mouse (CN31)

Pin	Signal	Pin	Signal
1	Keyboard Data	2	Keyboard Clock
3	Ground	4	+5 Volt.
5	Mouse Data	6	Mouse Clock

2.44 COM Port #1 (CN32)

Pin	Signal	Pin	Signal
1	DCDA	2	RXA
3	TXA	4	DTRA
5	Ground	6	DSRA
7	RTSA	8	CTSA
9	RIA		

2.45 CRT Display Connector (CN33)

Pin	Signal	Pin	Signal
1	RED	2	GREEN
3	BLUE	4	N/C
5	GREEN	6	Ground
7	Ground	8	Ground
9	+5 Volt.	10	CRT_PLUG#

11	N/C	12	DDCDATA
13	HSYNC	14	VSYNC
15	DDCCLK		

2.46 SIM Card Socket (CN34)

Pin	Signal	Pin	Signal
1	UIM_PWR	2	UIM_RST
3	UIM_CLK	4	Ground
5	UIM_VPP	6	UIM_DATA

2.47 CompactFlash Disk (CFD1)

Pin	Signal	Pin	Signal
1	Ground	26	Ground
2	PDD3	27	PDD11
3	PDD4	28	PDD12
4	PDD5	29	PDD13
5	PDD6	30	PDD14
6	PDD7	31	PDD15
7	PDCS#1	32	PDCS#3
8	Ground	33	Ground
9	Ground	34	PDIOR#
10	Ground	35	PDIOW#
11	Ground	36	+3.3 Volt.
12	Ground	37	INT_IRQ14
13	+3.3 Volt.	38	+3.3 Volt.
14	Ground	39	CSEL#
15	Ground	40	N/C
16	Ground	41	IDERST#

17	Ground	42	PIORDY
18	PDA2	43	N/C
19	PDA1	44	+3.3 Volt.
20	PDA0	45	DASP#
21	PDD0	46	PDIAG#
22	PDD1	47	PDD8
23	PDD2	48	PDD9
24	N/C	49	PDD10
25	Ground	50	Ground

2.48 Mini-Card Slot #1 (PCIE1)

Pin	Signal	Pin	Signal
1	PCIE_WAKE#	2	+3.3 Volt. Standby
3	N/C	4	Ground
5	N/C	6	+1.5 Volt.
7	CLKREQ#	8	UIM_PWR
9	Ground	10	UIM_DATA
11	MCARD_CLK1#	12	UIM_CLK
13	MCARD_CLK1	14	UIM_RESET
15	Ground	16	UIM_VPP
17	N/C	18	Ground
19	N/C	20	W_DISABLE#1
21	Ground	22	PCIE_RST#
23	PCIE_RXN1	24	+3.3 Volt. Standby
25	PCIE_RXP1	26	Ground
27	Ground	28	+1.5 Volt.
29	Ground	30	SMBCLK
31	PCIE_TXN1	32	SMBDATA

33	PCIE_TXP1	34	Ground
35	Ground	36	USB_Data8-
37	Ground	38	USB_Data8+
39	+3.3 Volt. Standby	40	Ground
41	+3.3 Volt. Standby	42	N/C
43	Ground	44	N/C
45	N/C	46	N/C
47	N/C	48	+1.5 Volt.
49	N/C	50	Ground
51	N/C	52	+3.3 Volt. Standby

2.49 Mini-Card Slot #2 (PCIE2)

Pin	Signal	Pin	Signal
1	PCIE_WAKE#	2	+3.3 Volt. Standby
3	N/C	4	Ground
5	N/C	6	+1.5 Volt.
7	CLKREQ#	8	N/C
9	Ground	10	N/C
11	MCARD_CLK2#	12	N/C
13	MCARD_CLK2	14	N/C
15	Ground	16	N/C
17	N/C	18	Ground
19	N/C	20	W_DISABLE#2
21	Ground	22	PCIE_RST#
23	PCIE_RXN2	24	+3.3 Volt. Standby
25	PCIE_RXP2	26	Ground
27	Ground	28	+1.5 Volt.
29	Ground	30	SMBCLK

31	PCIE_TXN2	32	SMBDATA
33	PCIE_TXP2	34	Ground
35	Ground	36	USB_Data9-
37	Ground	38	USB_Data9+
39	+3.3 Volt. Standby	40	Ground
41	+3.3 Volt. Standby	42	N/C
43	Ground	44	N/C
45	N/C	46	N/C
47	N/C	48	+1.5 Volt.
49	N/C	50	Ground
51	N/C	52	+3.3 Volt. Standby

2.50 DDR2 SODIMM Slot (DIMM1)

Standard specification

Below Table for China RoHS Requirements

产品中有毒有害物质或元素名称及含量

AAEON Main Board/ Daughter Board/ Backplane

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
印刷电路板 及其电子组件	×	○	○	○	○	○
外部信号 连接器及线材	×	○	○	○	○	○
<p>O: 表示该有毒有害物质在该部件所有均质材料中的含量均在 SJ/T 11363-2006 标准规定的限量要求以下。</p> <p>X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 SJ/T 11363-2006 标准规定的限量要求。</p> <p>备注: 此产品所标示之环保使用期限, 系指在一般正常使用状况下。</p>						

Chapter

3

**AMI
BIOS Setup**

3.1 System Test and Initialization

These routines test and initialize board hardware. If the routines encounter an error during the tests, you will either hear a few short beeps or see an error message on the screen. There are two kinds of errors: fatal and non-fatal. The system can usually continue the boot up sequence with non-fatal errors.

System configuration verification

These routines check the current system configuration against the values stored in the CMOS memory. If they do not match, the program outputs an error message. You will then need to run the BIOS setup program to set the configuration information in memory.

There are three situations in which you will need to change the CMOS settings:

1. You are starting your system for the first time
2. You have changed the hardware attached to your system
3. The CMOS memory has lost power and the configuration information has been erased.

The GENE-LN05 CMOS memory has an integral lithium battery backup for data retention. However, you will need to replace the complete unit when it finally runs down.

3.2 AMI BIOS Setup

AMI BIOS ROM has a built-in Setup program that allows users to modify the basic system configuration. This type of information is stored in battery-backed CMOS RAM so that it retains the Setup information when the power is turned off.

Entering Setup

Power on the computer and press or <F2> immediately. This will allow you to enter Setup.

Main

Set the date, use tab to switch between date elements.

Advanced

Enable/disable boot option for legacy network devices.

Chipset

host bridge parameters.

Boot

Enables/disables quiet boot option.

Security

Set setup administrator password.

Save&Exit

Exit system setup after saving the changes.

Chapter

4

**Driver
Installation**

The GENE-LN05 comes with an AutoRun CD-ROM that contains all drivers and utilities that can help you to install the driver automatically.

Insert the driver CD, the driver CD-title will auto start and show the installation guide. If not, please follow the sequence below to install the drivers.

Follow the sequence below to install the drivers:

Step 1 – Install Chipset Driver

Step 2 – Install VGA Driver

Step 3 – Install LAN Driver

Step 4 – Install Audio Driver

Step 5 – Install TPM Driver (Optional)

Step 6 – Install Touch Driver (Optional)

Step 7 – Install Rapid Storage Technology Driver (Optional)

Please read instructions below for further detailed installations.

4.1 Installation:

Insert the GENE-LN05 CD-ROM into the CD-ROM drive. And install the drivers from Step 1 to Step 7 in order.

Step 1 – Install Chipset Driver

1. Click on the **Step 1 - Intel Chipset Software Installation Utility** folder and double click on the **infinst_autol.exe**
2. Follow the instructions that the window shows
3. The system will help you install the driver automatically

Step 2 – Install VGA Driver

1. Click on the **Step 2 - Intel Graphics Media Accelerator Driver Production Version** folder and select the OS folder your system is
2. Double click on the **Setup.exe** file located in each OS folder
3. Follow the instructions that the window shows
4. The system will help you install the driver automatically

Step 3 –Install LAN Driver

1. Click on the **Step 3 - Intel Ethernet 82567V and 82583V** folder and select the **WDM** folder
2. Double click on the **PROWin32.exe** file
3. Follow the instructions that the window shows
4. The system will help you install the driver automatically

Step 4 –Install Audio Driver

1. Click on the **Step 4 - Realtek HD Audio Codec** folder and select the OS folder your system is
2. Double click on **Setup.exe** file located in each OS folder
3. Follow the instructions that the window shows
4. The system will help you install the driver automatically

Step 5 –Install TPM Driver (Optional)

1. Click on the **Step 5 - Infineon TPM (Option)** folder and double click on the **Setup.exe**
2. Follow the instructions that the window shows
3. The system will help you install the driver automatically

Step 6 –Install Touch Driver (Optional)

1. Click on the **Step 6 - PenMount Touch 6000 series (Option)** folder and select the OS folder your system is
2. Double click on the **.exe** located in each OS folder
3. Follow the instructions that the window shows
4. The system will help you install the driver automatically

Step 7 –Install Rapid Storage Technology Driver (Optional)

1. Click on the **Step 7 - Intel Rapid Storage Technology (Option)** folder and double click on the **setup.exe**
2. Follow the instructions that the window shows
3. The system will help you install the driver automatically

Appendix

A


Programming the Watchdog Timer

A.1 Programming

GENE-LN05 utilizes W83627DHG-P chipset as its watchdog timer controller.

Below are the procedures to complete its configuration and the AAEON initial watchdog timer program is also attached based on which you can develop customized program to fit your application.

Configuring Sequence Description

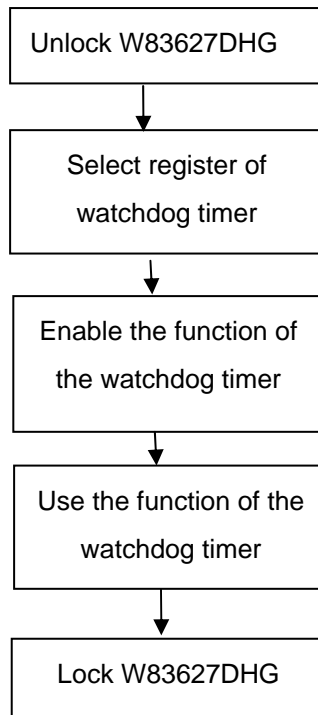

There are three steps to complete the configuration setup:

- (1) Enter the W83627DHG config Mode
- (2) Modify the data of configuration registers

- (3) Exit the W83627DHG config Mode. Undesired result may occur if the config Mode is not exited normally.

(1) Enter the W83627DHG config Mode

To enter the W83627DHG config Mode, two special I/O write operations are to be performed during Wait for Key state. To ensure the initial state of the key-check logic, it is necessary to perform two write operations to the Special Address port (2EH). The different enter keys are provided to select configuration ports (2Eh/2Fh) of the next step.

	Address Port	Data Port
87h,87h:	2Eh	2Fh

(2) Modify the Data of the Registers

All configuration registers can be accessed after entering the config Mode. Before accessing a selected register, the content of Index 07h must be changed to the LDN to which the register belongs, except some Global registers.

(3) Exit the W83627DHG config Mode

The exit key is provided to select configuration ports (2Eh/2Fh) of the next step.

	Address Port	Data Port
0aah:	2Eh	2Fh

WatchDog Timer Register I (Index=F5h, Default=00h)

CRF5 (PLED and KBC P20 Control Mode Register)

Bit 7-5 : select PLED mode

= 000 Power LED pin is driven high.

= 001 Power LED pin outputs 0.5Hz pulse with 50% duty cycle.

= 010 Power LED pin is driven low.

= 011 Power LED pin outputs 2Hz pulse with 50% duty cycle.

= 100 Power LED pin outputs 1Hz pulse with 50% duty cycle.

= 101 Power LED pin outputs 4Hz pulse with 50% duty cycle.

= 110 Power LED pin outputs 0.25Hz pulse with 50% duty cycle.

=111 Power LED pin outputs 0.25Hz pulse with 50% duty cycle..

Bit 4 : WDTO# count mode is 1000 times faster.

= 0 Disable.

= 1 Enable.

Bit 3 : select WDTO# count mode.

= 0 second

= 1 minute

Bit 2 : Enable the rising edge of keyboard Reset (P20) to force Time-out event.

= 0 Disable

= 1 Enable

Bit 1 : Disable / Enable the WDTO# output low pulse to the KBRST# pin (PIN60)

= 0 Disable

= 1 Enable

Bit 0 : Reserved.

WatchDog Timer Register II (Index=F6h, Default=00h)

- Bit 7-0** = 0 x 00 Time-out Disable
 = 0 x 01 Time-out occurs after 1 second/minute
 = 0 x 02 Time-out occurs after 2 second/minutes
 = 0 x 03 Time-out occurs after 3 second/minutes

 = 0 x FF Time-out occurs after 255 second/minutes

WatchDog Timer Register III (Index=F7h, Default=00h)

- Bit 7** : Mouse interrupt reset Enable or Disable
 = 1 Watchdog Timer is reset upon a Mouse interrupt
 = 0 Watchdog Timer is not affected by Mouse interrupt
- Bit 6** : Keyboard interrupt reset Enable or Disable
 = 1 Watchdog Timer is reset upon a Keyboard interrupt
 = 0 Watchdog Timer is not affected by Keyboard interrupt
- Bit 5** : Force Watchdog Timer Time-out. Write Only

- = 1 Force Watchdog Timer time-out event: this bit is self-clearing
- Bit 4** : Watchdog Timer Status. R/W
- = 1 Watchdog Timer time-out occurred
- = 0 Watchdog Timer counting
- Bit 3-0** : These bits select IRQ resource for Watchdog. Setting of 2 selects SMI.

A.2 W83627DHG Watchdog Timer Initial Program

Example: Setting 10 sec. as Watchdog timeout interval

```
;/;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
```

```
Mov dx,2eh           ;Enter W83627DHG config mode
```

```
Mov al,87h          (out 87h to 2eh twice)
```

```
Out dx,al
```

```
Out dx,al
```

```
;/;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
```

```
Mov al,07h
```

```
Out dx,al
```

```
Inc dx
```

```
Mov al,08h          ;Select Logical Device 8 (GPIO Port  
2)
```

```
Out dx,al
```

```
;/;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
```

```
Dec dx
```

```
Mov al,30h          ;CR30 (GP20~GP27)
```

```
Out dx,al
```

```
Inc dx
```

```
Mov al,01h          ;Activate GPIO2
```

```
Out dx,al
```

;/;;

```
Dec dx
Mov al,0f5h           ;CRF5 (PLED mode register)
Out dx,al
Inc dx
In al,dx
And al,not 08h       ;Set second as counting unit
Out dx,al
```

;/;;

```
Dec dx
Mov al,0f6h           ; CRF6
Out dx,al
Inc dx
Mov al,10             ;Set timeout interval as 10 sec.
Out dx,al
```

;/;;

```
Dec dx               ;Exit W83627DHG config mode
Mov al,0aah          (out 0aah to 2eh once)
Out dx,al
```

;/;;





























Appendix

B

I/O Information

B.1 I/O Address Map

Input/output (IO)	
[00000000 - 0000000F]	Direct memory access controller
[00000000 - 00000CF7]	PCI bus
[00000010 - 0000001F]	Motherboard resources
[00000020 - 00000021]	Programmable interrupt controller
[00000022 - 0000003F]	Motherboard resources
[00000040 - 00000043]	System timer
[00000044 - 0000005F]	Motherboard resources
[00000060 - 00000060]	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
[00000061 - 00000061]	System speaker
[00000062 - 00000063]	Motherboard resources
[00000064 - 00000064]	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
[00000065 - 0000006D]	Motherboard resources
[00000070 - 00000071]	System CMOS/real time clock
[00000072 - 0000007F]	Motherboard resources
[00000080 - 00000080]	Motherboard resources
[00000081 - 00000083]	Direct memory access controller
[00000084 - 00000086]	Motherboard resources
[00000087 - 00000087]	Direct memory access controller
[00000088 - 00000088]	Motherboard resources
[00000089 - 0000008B]	Direct memory access controller
[0000008C - 0000008E]	Motherboard resources
[0000008F - 0000008F]	Direct memory access controller
[00000090 - 0000009F]	Motherboard resources
[000000A0 - 000000A1]	Programmable interrupt controller
[000000A2 - 000000BF]	Motherboard resources
[000000C0 - 000000DF]	Direct memory access controller
[000000E0 - 000000EF]	Motherboard resources
[000000F0 - 000000FF]	Numeric data processor
[00000170 - 00000177]	Secondary IDE Channel
[000001F0 - 000001F7]	Primary IDE Channel
[00000274 - 00000277]	ISAPNP Read Data Port
[00000279 - 00000279]	ISAPNP Read Data Port
[00000295 - 000002A4]	Motherboard resources
[000002E0 - 000002E7]	Communications Port (COM5)
[000002E8 - 000002EF]	Communications Port (COM4)
[000002F0 - 000002F7]	Communications Port (COM6)
[000002F8 - 000002FF]	Communications Port (COM2)
[00000376 - 00000376]	Secondary IDE Channel

	[00000378 - 0000037F] Printer Port (LPT1)
	[00000380 - 000003BB] Intel(R) Graphics Media Accelerator 3150
	[000003C0 - 000003DF] Intel(R) Graphics Media Accelerator 3150
	[000003E8 - 000003EF] Communications Port (COM3)
	[000003F6 - 000003F6] Primary IDE Channel
	[000003F8 - 000003FF] Communications Port (COM1)
	[00000480 - 000004BF] Motherboard resources
	[000004D0 - 000004D1] Motherboard resources
	[00000800 - 0000087F] Motherboard resources
	[00000A79 - 00000A79] ISAPNP Read Data Port
	[00000D00 - 0000FFFF] PCI bus
	[0000E000 - 0000E01F] Intel(R) 82583V Gigabit Network Connection
	[0000E000 - 0000EFFF] Intel(R) ICH8 Family PCI Express Root Port 1 - 283F
	[0000F000 - 0000F01F] Intel(R) ICH8 Family SMBus Controller - 283E
	[0000F020 - 0000F03F] Intel(R) ICH8 Family USB Universal Host Controller - 2832
	[0000F040 - 0000F05F] Intel(R) ICH8 Family USB Universal Host Controller - 2831
	[0000F060 - 0000F07F] Intel(R) ICH8 Family USB Universal Host Controller - 2830
	[0000F080 - 0000F09F] Intel(R) ICH8 Family USB Universal Host Controller - 2835
	[0000F0A0 - 0000F0BF] Intel(R) ICH8 Family USB Universal Host Controller - 2834
	[0000F0C0 - 0000F0DF] Intel(R) 82567V-3 Gigabit Network Connection
	[0000F0E0 - 0000F0EF] Intel(R) ICH8M 3 port Serial ATA Storage Controller - 2828
	[0000F0F0 - 0000F0FF] Intel(R) ICH8M 3 port Serial ATA Storage Controller - 2828
	[0000F100 - 0000F103] Intel(R) ICH8M 3 port Serial ATA Storage Controller - 2828
	[0000F110 - 0000F117] Intel(R) ICH8M 3 port Serial ATA Storage Controller - 2828
	[0000F120 - 0000F123] Intel(R) ICH8M 3 port Serial ATA Storage Controller - 2828
	[0000F130 - 0000F137] Intel(R) ICH8M 3 port Serial ATA Storage Controller - 2828
	[0000F140 - 0000F14F] Intel(R) ICH8M Ultra ATA Storage Controllers - 2850
	[0000F190 - 0000F197] Intel(R) Graphics Media Accelerator 3150

B.2 1st MB Memory Address Map

Address Range	Device
[000A0000 - 000BFFFF]	Intel(R) Graphics Media Accelerator 3150
[000A0000 - 000BFFFF]	PCI bus
[1F700000 - FFFFFFFF]	PCI bus
[E0000000 - EFFFFFFF]	Intel(R) Graphics Media Accelerator 3150
[F0000000 - F3FFFFFF]	System board
[FE800000 - FE8FFFFFF]	Intel(R) Graphics Media Accelerator 3150
[FE900000 - FE91FFFF]	Intel(R) 82583V Gigabit Network Connection
[FE900000 - FE9FFFFFF]	Intel(R) ICH8 Family PCI Express Root Port 1 - 283F
[FE920000 - FE923FFF]	Intel(R) 82583V Gigabit Network Connection
[FEA00000 - FEA7FFFF]	Intel(R) Graphics Media Accelerator 3150
[FEA80000 - FEAFFFFFF]	Intel(R) Graphics Media Accelerator 3150
[FEB00000 - FEB1FFFF]	Intel(R) 82567V-3 Gigabit Network Connection
[FEB20000 - FEB23FFF]	Microsoft UAA Bus Driver for High Definition Audio
[FEB24000 - FEB240FF]	Intel(R) ICH8 Family SMBus Controller - 283E
[FEB25000 - FEB253FF]	Intel(R) ICH8 Family USB2 Enhanced Host Controller - 2836
[FEB26000 - FEB263FF]	Intel(R) ICH8 Family USB2 Enhanced Host Controller - 283A
[FEB27000 - FEB27FFF]	Intel(R) 82567V-3 Gigabit Network Connection
[FEC00000 - FEC0FFFF]	Motherboard resources
[FED14000 - FED19FFF]	System board
[FED1C000 - FED1FFFF]	Motherboard resources
[FED20000 - FED8FFFF]	Motherboard resources
[FEE00000 - FEE00FFF]	Motherboard resources
[FFE00000 - FFFFFFFF]	Motherboard resources

B.3 IRQ Mapping Chart

IRQ	Device
(ISA) 0	System timer
(ISA) 1	Standard 101/102-Key or Microsoft Natural PS/2 Keyboard
(ISA) 3	Communications Port (COM2)
(ISA) 4	Communications Port (COM1)
(ISA) 8	System CMOS/real time clock
(ISA) 9	Microsoft ACPI-Compliant System
(ISA) 10	Communications Port (COM3)
(ISA) 10	Communications Port (COM4)
(ISA) 10	Communications Port (COM5)
(ISA) 10	Communications Port (COM6)
(ISA) 12	Microsoft PS/2 Mouse
(ISA) 13	Numeric data processor
(ISA) 14	Primary IDE Channel
(ISA) 15	Secondary IDE Channel
(PCI) 7	Intel(R) ICH8 Family SMBus Controller - 283E
(PCI) 16	Intel(R) 82583V Gigabit Network Connection
(PCI) 16	Intel(R) Graphics Media Accelerator 3150
(PCI) 16	Intel(R) ICH8 Family USB Universal Host Controller - 2834
(PCI) 18	Intel(R) ICH8 Family USB Universal Host Controller - 2832
(PCI) 18	Intel(R) ICH8 Family USB2 Enhanced Host Controller - 283A
(PCI) 18	Intel(R) ICH8M 3 port Serial ATA Storage Controller - 2828
(PCI) 19	Intel(R) ICH8 Family USB Universal Host Controller - 2831
(PCI) 21	Intel(R) ICH8 Family USB Universal Host Controller - 2835
(PCI) 21	Microsoft UAA Bus Driver for High Definition Audio
(PCI) 22	Intel(R) ICH8 Family PCI Express Root Port 1 - 283F
(PCI) 23	Intel(R) 82567V-3 Gigabit Network Connection
(PCI) 23	Intel(R) ICH8 Family USB Universal Host Controller - 2830
(PCI) 23	Intel(R) ICH8 Family USB2 Enhanced Host Controller - 2836

Memory

B.4 DMA Channel Assignments

Direct memory access (DMA)	4 Direct memory access controller
Input/output (IO)	
Interrupt request (IRQ)	
Memory	

Appendix

C

Mating Connector

C.1 List of Mating Connectors and Cables

The table notes mating connectors and available cables.

Connector Label	Function	Mating Connector		Available Cable	Cable P/N
		Vendor	Model no.		
CN2	+5VSB Output w/ SMBus	Catch	2418HJ-06	ATX External 5VSB Cable	External AUX Power and PS_ON#
CN3	External +5VSB Power Input and PS_ON#	Liantay	H735-03	ATX Cable	170220020B
CN4	LPC Expansion I/F	Liantay	H746-12	AAEON LPC Cable	1703120130
CN5	SATA Port 1	Molex	67582-0000	SATA Cable	1709070500
CN6	SATA Port 2	Molex	67582-0000	SATA Cable	1709070500
CN8	External 12V Input	N/A	N/A	Power Cable	1702002010
CN9	Touch Screen	Liantay	H746-09	N/A	N/A
CN10	+5V Output for SATA HDD using	Catch	2418HJ-02	SATA Power Cable	1702150155
CN13	COM Port #6	Molex	51021-0900	UART Wafer Cable	1701090150
CN14	USB Port #7	Molex	51021-0500	USB Wafer Cable	1700050207
CN15	COM Port #5	Molex	51021-0900	UART Wafer Cable	1701090150

SubCompact Board**GENE-LN05**

CN16	USB Port #6	Molex	51021-0500	USB Wafer Cable	1700050207
CN17	USB Port #5	Molex	51021-0500	USB Wafer Cable	1700050207
CN18	COM Port #4	Molex	51021-0900	UART Wafer Cable	1701090150
CN19	USB Port #4	Molex	51021-0500	USB Wafer Cable	1700050207
CN20	USB Port #3	Molex	51021-0500	USB Wafer Cable	1700050207
CN21	COM Port #3	Molex	51021-0900	UART Wafer Cable	1701090150
CN22	COM Port #2	Molex	51021-0900	UART Wafer Cable	1701090150
CN23	Audio Line In/Out and MIC Connector	Molex	51021-1000	Audio Cable	1709100254
CN24	RJ-45 Ethernet #2	Neltron	7001-8P8C	N/A	N/A
CN25	RJ-45 Ethernet #1	Neltron	7001-8P8C	N/A	N/A
CN26	Digital I/O	Neltron	2026B-10	N/A	N/A
CN27	Parallel Port	Catch	H754-2x13	Parallel Cable	1701260200
CN28	LVDS Inverter Control	Catch	2418HJ-02	N/A	N/A
CN29	LVDS Output	HIROSE	DF13-30DS-1.25C	N/A	N/A
CN31	PS/2 Keyboard & Mouse	Catch	A003-290	KB/MS Cable	1700060152
BAT1	External RTC Connector	Molex	51021-0200	Battery Cable	175011901C