

# FWS-7821

Supplier: POKI / box size: 529(L)\*444(W)\*184(H) mm

## Package Drop Test Report

Report NO: 16I030018



Summary	<p><input checked="" type="checkbox"/> <b>Pass</b></p> <p><input type="checkbox"/> <b>Fail</b></p> <p>Note : There is/are ____ defect(s) not list in the report, please check it in the DTS Website.</p> <p><input type="checkbox"/> <b>Pass with Deviation</b></p> <p><b>Comment:</b> _____</p>
---------	--

Issue date

QE Manager

Issued by

Test Engineer

2016-12-09

KJ Wang

Ben Sun

Peter Pan

# Test item list

---

1. *Test item list* ----- 2
2. *Configuration of EUT* ----- 3
3. *Package drop test* ----- 4

## Testing Result

Num	Test item list	Result	Remark
1	Package drop test	Pass	

# Package Drop Test

**Test Date:** 12-08-2016

**Test Product:** FWS-7821

**Test Site:** AAEON QE Dept.

**Test Standard:**

Reference ISTA PROJECT 1A

**Test Equipment:**

Drop Tester


KING DESIGN Co. LTD.

Model: KD-128A

Serial Number: UU110099185

**Test Condition:**

1. Test Phase: One corner. Three edges. Six face
2. Test Cycle: 1 Cycle
3. Test High: 76cm
4. Test Weight: 5.5Kg
5. Sample Package: 1unit in double-package.
6. Test Drawing:

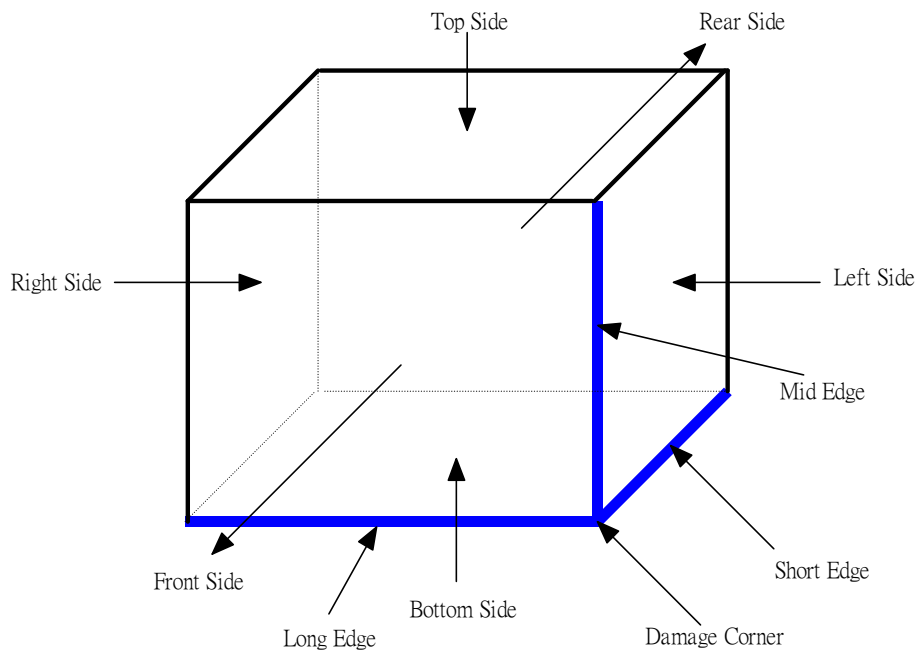

**Test Result:**

No issues were found after the packing drop test.