

UP-APL01

Supplier: POKI / Gift box size: 126(L)*122(W)*57(H) mm

Package Drop Test Report

Report NO: 17D030013



Summary	<p><input checked="" type="checkbox"/> Pass</p> <p><input type="checkbox"/> Fail Note : There is/are ____ defect(s) not list in the report, please check it in the DTS Website.</p> <p><input type="checkbox"/> Pass with Deviation</p> <p>Comment: _____</p>
---------	---

Issue date

2017-09-22

QE Manager

KJ Wang

Test Engineer


Juno Cheng

Test item list

1. *Test item list* ----- 2
2. *Configuration of EUT* ----- 3
3. *Package drop test* ----- 4

Testing Result

Num	Test item list	Result	Remark
1	Package drop test	Pass	

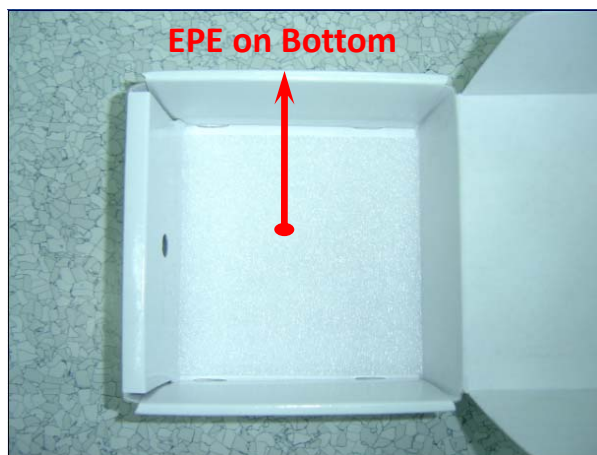

Package Drop Test

Test Date: 09-21-2017

Test Product: UP-APL01

Test Site: AAEON QE Dept.

Test Standard:

Reference ISTA PROJECT 2A

Test Equipment:

Drop Tester


KING DESIGN Co. LTD.

Model: KD-128A

Serial Number: UU110099190

Test Condition:

1. Test Phase: One corner. Three edges. Six face
2. Test Cycle: 1 Cycle
3. Test Height: 97cm
4. Test Weight: 0.28 Kg
5. Sample Package: 1unit in single-package.
6. Test Drawing:

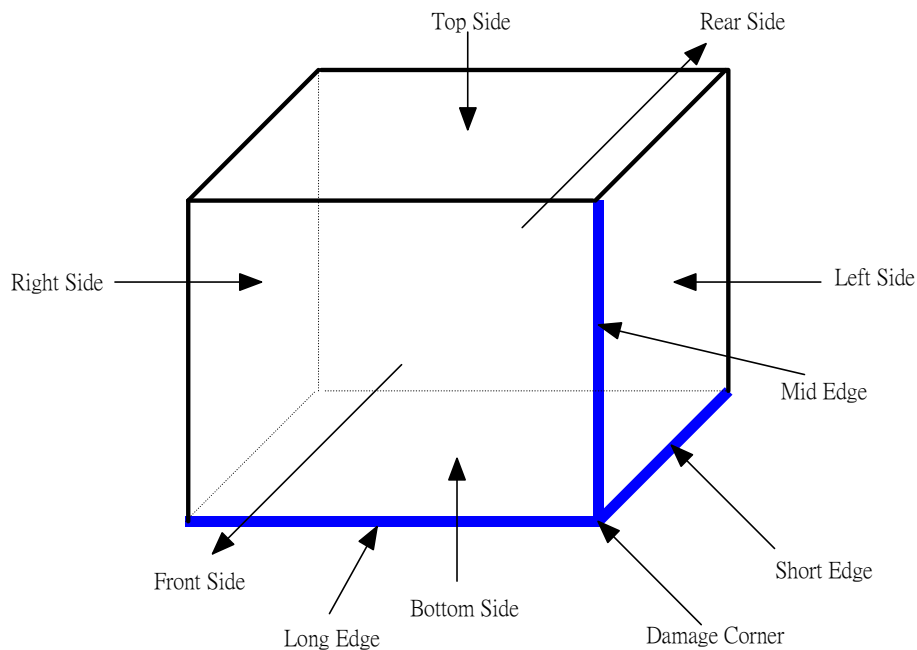

Test Result:

Packaging is not broken, main board no structure deformation and function was working normally after drop test.