

NVR-CV

Network Video Recorder
Hot-Swappable Tray for
3.5" HDD x 4 or 2.5" HDD x 4
Gigabit Ethernet x 2
COM x 2, USB2.0 x 6
VGA x 1, DVI-D x 1

Copyright Notice

This document is copyrighted, 2013. All rights are reserved. The original manufacturer reserves the right to make improvements to the products described in this manual at any time without notice.

No part of this manual may be reproduced, copied, translated, or transmitted in any form or by any means without the prior written permission of the original manufacturer. Information provided in this manual is intended to be accurate and reliable. However, the original manufacturer assumes no responsibility for its use, or for any infringements upon the rights of third parties that may result from its use.

The material in this document is for product information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, AAEMON assumes no liabilities resulting from errors or omissions in this document, or from the use of the information contained herein.

AAEMON reserves the right to make changes in the product design without notice to its users.

Acknowledgments

All other products' name or trademarks are properties of their respective owners.

- AMI is a trademark of American Megatrends Inc.
- CompactFlash™ is a trademark of the Compact Flash Association.
- Intel® is a trademark of Intel® Corporation.
- Microsoft Windows® is a registered trademark of Microsoft Corp.
- ITE is a trademark of Integrated Technology Express, Inc.
- IBM, PC/AT, PS/2, and VGA are trademarks of International Business Machines Corporation.
- SoundBlaster is a trademark of Creative Labs, Inc.

All other product names or trademarks are properties of their respective owners.

Packing List

Before you begin installing your card, please make sure that the following materials have been shipped:

- 1 CD-ROM for Manual (in PDF Format) and Drivers
- 1 NVR-CV

If any of these items should be missing or damaged, please contact your distributor or sales representative immediately.

Contents

Chapter 1 General Information

1.1 Introduction.....	1-2
1.2 Features	1-3
1.3 Specifications	1-4

Chapter 2 Hardware Installation

2.1 Mechanical Drawing.....	2-2
2.2 Installing the 3.5" Hard Disk Drive.....	2-3

Chapter 3 Driver Installation

3.1 Installation	3-3
------------------------	-----

Chapter 4 I/O Information

4.1 I/O Address Map	4-2
4.2 1 st MB Memory Address Map.....	4-4
4.3 IRQ Mapping Chart	4-5
4.4 DMA Channel Assignments	4-7

Chapter

1

**General
Information**

1.1 Introduction

NVR-CV adopts the Intel® Atom™ D2550 Dual Core Processor and equips with Intel® NM10 chipset. Moreover, the system memory features two 204-pin Single Channel DDR3 1066/800 non-ECC, un-buffered DIMM memory up to 4GB. It deploys two LAN ports that consist of 10/100/1000Base-TX Ethernet RJ-45 ports.

NVR-CV features desktop form factor for network video recorder applications.

This NVR-CV supports up to four 3.5" Hard Disk Drive or four 2.5" SATA swappable HDD. Moreover, the flexible expansion interface features one PCI-E[x4] slot. In addition, this model supports two COM ports, and six USB2.0 ports (two USB2.0 ports on the ear and four USB2.0 ports on the rear.) Furthermore, the NVR-CV can support dual displays with one VGA and one DVI-D.

1.2 Features

- Intel® Atom™ D2550 Dual Core Processor
- Intel® NM10 Chipset
- 204-pin Single Channel DDR3 1066/800 Non-ECC, Un-buffered DIMM Memory Up To 4GB
- 10/100/1000Base-TX Ethernet x 2
- Hot-Swappable Tray for 3.5" HDD x 4 or 2.5" HDD x 4
- COM x 2
- USB2.0 x 6
- VGA x 1, DVI-D x 1
- Audio Line-out, Line-in, Mic-in
- RAID 0/1/5/10 support
- Supports Linux OS and Windows® XP embedded Standard (optional)

1.3 Specifications

System

● CPU	Intel® Atom™ D2550 Dual Core Processor, 1.83 GHz
● Chipset	Intel® NM10
● System Memory	204-pin Single Channel DDR3 1066/800 Non-ECC, Un-buffered Memory, support up to 4G
● LCD/CRT Controller	Intel® NM10
● Ethernet	Realtek 8111E for 10/100/1000Base-TX, RJ-45 x 2
● BIOS	AMI Plug & Play BIOS – 32MB SPI
● Serial ATA	SATA x 6
● Wake on LAN	Yes
● Hardware Status Monitoring	Supports Power Supply Voltage, Fan Speed and Temperature Monitoring
● Expansion Interface	PCI-E[x4] x 1
● Watchdog Timer	Programmable 1~255 steps System Reset
● Storage	Supports 3.5" or 2.5" removable SATA HDD tray x 4
● Front I/O Port	Power Button x 1 Reset Button x 1 Power & HDD LED USB2.0 x 2
● Rear I/O Port	VGA x 1 DVI-D x 1 RJ-45 x 2 USB2.0 x 4 Audio Jack x 3
● RAID Support	0/1/5/10

Mechanical

● Dimension	7.87" x 9.84" x 11.93" (200mm x 250mm x 303mm)
● Gross Weight	17.6 lb (8 Kg)
● Net Weight	15.4 lb (7 Kg)

Environmental

● Operating Temperature	32°F ~ 104°F (0°C ~ 40°C)
● Storage Temperature	-4°F ~ 140°F (-20°C ~ 60°C)
● Storage Humidity	10%~80% @40°C; non-condensing
● Vibration	0.5 g rms/ 5~500Hz/ operation (2.5" HDD) 1.5 g rms/ 5~500Hz/ non-operation
● Shock	10 G peak acceleration (11 m sec. duration) operation 20 G peak acceleration (11 m sec. duration) non-operation

Power Supply


● DC Output	200W
● AC Input Voltage Range	100~240VAC, 47~63HZ, 3.5A

Chapter

2

Hardware Installation

2.1 Mechanical Drawing

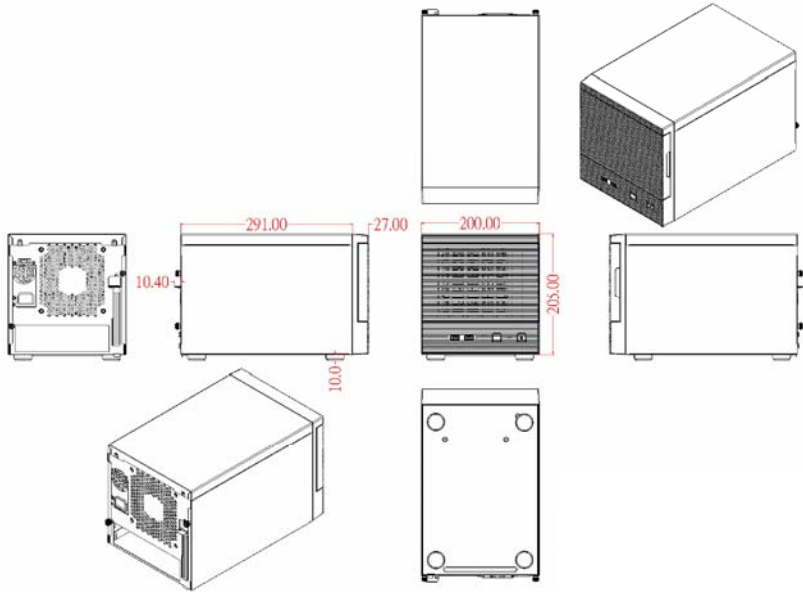

2.2 Installing the 3.5" Hard Disk Drive

Step 1: Press HDD to the right to remove the HDD tray



Step 2: Put the HDD to the HDD bracket (tray)



Step 3: Fasten the HDD on the bottom bracket with three screws



Step 4: Insert the HDD tray back to the chassis



Step 5: Push the HDD tray to the chassis until it has been firmly locked



Chapter

3

**Driver
Installation**

The NVR-CV comes with an AutoRun CD-ROM that contains all drivers and utilities that can help you to install the driver automatically.

Insert the driver CD, the driver CD-title will auto start and show the installation guide. If not, please follow the sequence below to install the drivers.

Follow the sequence below to install the drivers:

- Step 1 – Install Chipset Driver
- Step 2 – Install VGA Driver
- Step 3 – Install LAN Driver
- Step 4 – Install Audio Driver
- Step 5 – Install AHCI Driver
- Step 6 – Install Serial Port Driver (Optional)

Please read instructions below for further detailed installations.

3.1 Installation

Insert the NVR-CV CD-ROM into the CD -ROM drive and install the drivers from Step 1 to Step 6 in order.

Step 1 – Install Chipset Driver

1. Click on the **Step 1 - INF** folder and double click on the ***infinst_autol*** file
2. Follow the instructions that the window shows
3. The system will help you install the driver automatically

Step 2 – Install VGA Driver

1. Click on the **Step 2 - VGA** folder and select the OS folder your system is
2. Double click on the **.exe** file located in each OS folder
3. Follow the instructions that the window shows
4. The system will help you install the driver automatically

Step 3 – Install LAN Driver

1. Click on the **Step 3 - LAN** folder and select the OS folder your system is
2. Double click on the **setup.exe** file located in each OS folder
3. Follow the instructions that the window shows
4. The system will help you install the driver automatically

Step 4 – Install Audio Driver

1. Click on the **Step 4 - AUDIO** folder and double click on the **SETUP.exe** file
2. Follow the instructions that the window shows
3. The system will help you install the driver automatically

Step 5 – Install AHCI Driver

1. Click on the **Step 5 - AHCI** folder and select the folder of **AP**
2. Double click on the **iata_cd.exe** file
3. Follow the instructions that the window shows
4. The system will help you install the driver automatically

Step 6 – Install Serial Port Driver (Optional)

1. Click on the **Step 6 - Serial Port Driver (Optional)** and double click on the **patch.bat** file
2. Follow the instructions that the window shows
3. The system will help you install the driver automatically









































Chapter

4


I/O Information

4.1 I/O Address Map

Input/output (IO)	
[00000000 - 0000001F]	Direct memory access controller
[00000000 - 0000CF7]	PCI bus
[00000010 - 0000001F]	Motherboard resources
[00000020 - 00000021]	Programmable interrupt controller
[00000022 - 0000003F]	Motherboard resources
[00000024 - 00000025]	Programmable interrupt controller
[00000028 - 00000029]	Programmable interrupt controller
[0000002C - 0000002D]	Programmable interrupt controller
[0000002E - 0000002F]	Motherboard resources
[00000030 - 00000031]	Programmable interrupt controller
[00000034 - 00000035]	Programmable interrupt controller
[00000038 - 00000039]	Programmable interrupt controller
[0000003C - 0000003D]	Programmable interrupt controller
[00000040 - 00000043]	System timer
[00000044 - 0000005F]	Motherboard resources
[0000004E - 0000004F]	Motherboard resources
[00000050 - 00000053]	System timer
[00000061 - 00000061]	Motherboard resources
[00000062 - 00000063]	Motherboard resources
[00000063 - 00000063]	Motherboard resources
[00000065 - 00000065]	Motherboard resources
[00000065 - 0000006F]	Motherboard resources
[00000067 - 00000067]	Motherboard resources
[00000070 - 00000070]	Motherboard resources
[00000070 - 00000077]	System CMOS/real time clock
[00000072 - 0000007F]	Motherboard resources
[00000080 - 00000080]	Motherboard resources
[00000080 - 00000080]	Motherboard resources
[00000081 - 00000091]	Direct memory access controller
[00000084 - 00000086]	Motherboard resources
[00000088 - 00000088]	Motherboard resources
[0000008C - 0000008E]	Motherboard resources
[00000090 - 0000009F]	Motherboard resources
[00000092 - 00000092]	Motherboard resources
[00000093 - 0000009F]	Direct memory access controller
[000000A0 - 000000A1]	Programmable interrupt controller
[000000A2 - 000000BF]	Motherboard resources
[000000A4 - 000000A5]	Programmable interrupt controller
[000000A8 - 000000A9]	Programmable interrupt controller
[000000AC - 000000AD]	Programmable interrupt controller
[000000B0 - 000000B1]	Programmable interrupt controller
[000000B2 - 000000B3]	Motherboard resources
[000000B4 - 000000B5]	Programmable interrupt controller
[000000B8 - 000000B9]	Programmable interrupt controller
[000000BC - 000000BD]	Programmable interrupt controller
[000000C0 - 000000DF]	Direct memory access controller

	[000000E0 - 000000EF]	Motherboard resources
	[000000F0 - 000000F0]	Numeric data processor
	[00000290 - 0000029F]	Motherboard resources
	[000002E8 - 000002EF]	Communications Port (COM4)
	[000002F0 - 000002F7]	Communications Port (COM5)
	[000002F8 - 000002FF]	Communications Port (COM2)
	[00000378 - 0000037F]	Printer Port (LPT1)
	[000003B0 - 000003BB]	Intel(R) Graphics Media Accelerator 3600 Series
	[000003C0 - 000003DF]	Intel(R) Graphics Media Accelerator 3600 Series
	[000003E8 - 000003EF]	Communications Port (COM3)
	[000003F8 - 000003FF]	Communications Port (COM1)
	[00000400 - 0000047F]	Motherboard resources
	[00000400 - 0000047F]	Motherboard resources
	[000004D0 - 000004D1]	Motherboard resources
	[000004D0 - 000004D1]	Programmable interrupt controller
	[00000500 - 0000053F]	Motherboard resources
	[00000500 - 0000057F]	Motherboard resources
	[00000600 - 0000061F]	Motherboard resources
	[00000680 - 0000069F]	Motherboard resources
	[00000800 - 0000081F]	Intel(R) N10/ICH7 Family SMBus Controller - 27DA
	[00000A00 - 00000A1F]	Motherboard resources
	[00000A20 - 00000A2F]	Motherboard resources
	[00000D00 - 0000FFFF]	PCI bus
	[0000D000 - 0000D0FF]	Realtek PCIe GBE Family Controller #2
	[0000D000 - 0000DFFF]	Intel(R) N10/ICH7 Family PCI Express Root Port - 27D4
	[0000E000 - 0000E0FF]	Realtek PCIe GBE Family Controller
	[0000E000 - 0000EFFF]	Intel(R) N10/ICH7 Family PCI Express Root Port - 27D2
	[0000F000 - 0000F01F]	Intel(R) N10/ICH7 Family USB Universal Host Controller - 27CB
	[0000F020 - 0000F03F]	Intel(R) N10/ICH7 Family USB Universal Host Controller - 27CA
	[0000F040 - 0000F05F]	Intel(R) N10/ICH7 Family USB Universal Host Controller - 27C9
	[0000F060 - 0000F07F]	Intel(R) N10/ICH7 Family USB Universal Host Controller - 27C8
	[0000F080 - 0000F08F]	Intel(R) N10/ICH7 Family Serial ATA Storage Controller - 27C0
	[0000F090 - 0000F093]	Intel(R) N10/ICH7 Family Serial ATA Storage Controller - 27C0
	[0000F0A0 - 0000F0A7]	Intel(R) N10/ICH7 Family Serial ATA Storage Controller - 27C0
	[0000F0B0 - 0000F0B3]	Intel(R) N10/ICH7 Family Serial ATA Storage Controller - 27C0
	[0000F0C0 - 0000F0C7]	Intel(R) N10/ICH7 Family Serial ATA Storage Controller - 27C0
	[0000F0D0 - 0000F0D7]	Intel(R) Graphics Media Accelerator 3600 Series
	[0000FFFF - 0000FFFF]	Motherboard resources
	[0000FFFF - 0000FFFF]	Motherboard resources
	[0000FFFF - 0000FFFF]	Motherboard resources

4.2 1st MB Memory Address Map

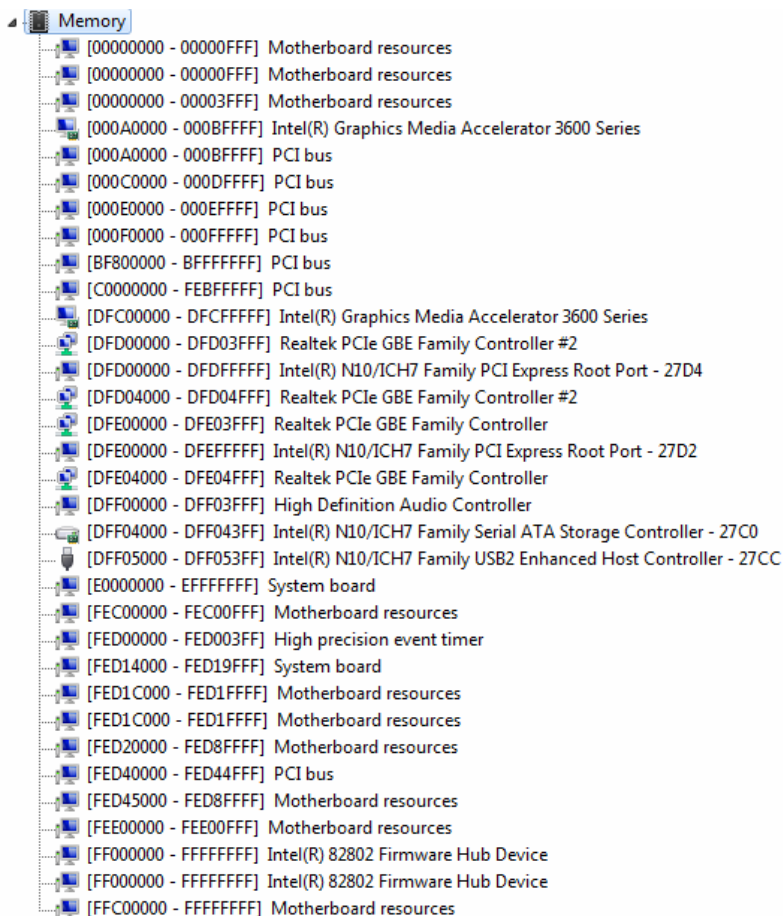






















































The image shows a screenshot of the Windows System Information tool, specifically the 'Memory' section. It displays a list of memory addresses and their corresponding hardware resources. The list includes various components such as Motherboard resources, Intel(R) Graphics Media Accelerator 3600 Series, PCI bus, Realtek PCIe GBE Family Controller, Intel(R) N10/ICH7 Family PCI Express Root Port, High Definition Audio Controller, Intel(R) N10/ICH7 Family Serial ATA Storage Controller, Intel(R) N10/ICH7 Family USB2 Enhanced Host Controller, System board, High precision event timer, and Intel(R) 82802 Firmware Hub Device.

Address Range	Resource
[00000000 - 00000FFF]	Motherboard resources
[00000000 - 00000FFF]	Motherboard resources
[00000000 - 00003FFF]	Motherboard resources
[000A0000 - 000BFFFF]	Intel(R) Graphics Media Accelerator 3600 Series
[000A0000 - 000BFFFF]	PCI bus
[000C0000 - 000DFFFF]	PCI bus
[000E0000 - 000EFFFF]	PCI bus
[000F0000 - 000FFFFFF]	PCI bus
[BF800000 - BFFFFFFF]	PCI bus
[C0000000 - FEBFFFFF]	PCI bus
[DFC00000 - DFCFFFFFF]	Intel(R) Graphics Media Accelerator 3600 Series
[DFD00000 - DFD03FFF]	Realtek PCIe GBE Family Controller #2
[DFD00000 - DFDFFFFFF]	Intel(R) N10/ICH7 Family PCI Express Root Port - 27D4
[DFD04000 - DFD04FFF]	Realtek PCIe GBE Family Controller #2
[DFE00000 - DFE03FFF]	Realtek PCIe GBE Family Controller
[DFE00000 - DFEFFFFFF]	Intel(R) N10/ICH7 Family PCI Express Root Port - 27D2
[DFE04000 - DFE04FFF]	Realtek PCIe GBE Family Controller
[DFF00000 - DFF03FFF]	High Definition Audio Controller
[DFF04000 - DFF043FF]	Intel(R) N10/ICH7 Family Serial ATA Storage Controller - 27C0
[DFF05000 - DFF053FF]	Intel(R) N10/ICH7 Family USB2 Enhanced Host Controller - 27C8
[E0000000 - EFFFFFFF]	System board
[FEC00000 - FEC00FFF]	Motherboard resources
[FED00000 - FED003FF]	High precision event timer
[FED14000 - FED19FFF]	System board
[FED1C000 - FED1FFFF]	Motherboard resources
[FED1C000 - FED1FFFF]	Motherboard resources
[FED20000 - FED8FFFF]	Motherboard resources
[FED40000 - FED44FFF]	PCI bus
[FED45000 - FED8FFFF]	Motherboard resources
[FEE00000 - FEE00FFF]	Motherboard resources
[FF000000 - FFFFFFFF]	Intel(R) 82802 Firmware Hub Device
[FF000000 - FFFFFFFF]	Intel(R) 82802 Firmware Hub Device
[FFC00000 - FFFFFFFF]	Motherboard resources

4.3 IRQ Mapping Chart

Interrupt request (IRQ)	Description
(ISA) 0x00000000 (00)	System timer
(ISA) 0x00000003 (03)	Communications Port (COM2)
(ISA) 0x00000004 (04)	Communications Port (COM1)
(ISA) 0x00000007 (07)	Communications Port (COM3)
(ISA) 0x00000008 (08)	System CMOS/real time clock
(ISA) 0x0000000A (10)	Communications Port (COM4)
(ISA) 0x0000000B (11)	Communications Port (COM5)
(ISA) 0x0000000D (13)	Numeric data processor
(ISA) 0x00000051 (81)	Microsoft ACPI-Compliant System
(ISA) 0x00000052 (82)	Microsoft ACPI-Compliant System
(ISA) 0x00000053 (83)	Microsoft ACPI-Compliant System
(ISA) 0x00000054 (84)	Microsoft ACPI-Compliant System
(ISA) 0x00000055 (85)	Microsoft ACPI-Compliant System
(ISA) 0x00000056 (86)	Microsoft ACPI-Compliant System
(ISA) 0x00000057 (87)	Microsoft ACPI-Compliant System
(ISA) 0x00000058 (88)	Microsoft ACPI-Compliant System
(ISA) 0x00000059 (89)	Microsoft ACPI-Compliant System
(ISA) 0x0000005A (90)	Microsoft ACPI-Compliant System
(ISA) 0x0000005B (91)	Microsoft ACPI-Compliant System
(ISA) 0x0000005C (92)	Microsoft ACPI-Compliant System
(ISA) 0x0000005D (93)	Microsoft ACPI-Compliant System
(ISA) 0x0000005E (94)	Microsoft ACPI-Compliant System
(ISA) 0x0000005F (95)	Microsoft ACPI-Compliant System
(ISA) 0x00000060 (96)	Microsoft ACPI-Compliant System
(ISA) 0x00000061 (97)	Microsoft ACPI-Compliant System
(ISA) 0x00000062 (98)	Microsoft ACPI-Compliant System
(ISA) 0x00000063 (99)	Microsoft ACPI-Compliant System
(ISA) 0x00000064 (100)	Microsoft ACPI-Compliant System
(ISA) 0x00000065 (101)	Microsoft ACPI-Compliant System
(ISA) 0x00000066 (102)	Microsoft ACPI-Compliant System
(ISA) 0x00000067 (103)	Microsoft ACPI-Compliant System
(ISA) 0x00000068 (104)	Microsoft ACPI-Compliant System
(ISA) 0x00000069 (105)	Microsoft ACPI-Compliant System
(ISA) 0x0000006A (106)	Microsoft ACPI-Compliant System
(ISA) 0x0000006B (107)	Microsoft ACPI-Compliant System
(ISA) 0x0000006C (108)	Microsoft ACPI-Compliant System
(ISA) 0x0000006D (109)	Microsoft ACPI-Compliant System
(ISA) 0x0000006E (110)	Microsoft ACPI-Compliant System
(ISA) 0x0000006F (111)	Microsoft ACPI-Compliant System
(ISA) 0x00000070 (112)	Microsoft ACPI-Compliant System
(ISA) 0x00000071 (113)	Microsoft ACPI-Compliant System
(ISA) 0x00000072 (114)	Microsoft ACPI-Compliant System
(ISA) 0x00000073 (115)	Microsoft ACPI-Compliant System
(ISA) 0x00000074 (116)	Microsoft ACPI-Compliant System
(ISA) 0x00000075 (117)	Microsoft ACPI-Compliant System
(ISA) 0x00000076 (118)	Microsoft ACPI-Compliant System
(ISA) 0x00000077 (119)	Microsoft ACPI-Compliant System
(ISA) 0x00000078 (120)	Microsoft ACPI-Compliant System

	(ISA) 0x00000079 (121)	Microsoft ACPI-Compliant System
	(ISA) 0x0000007A (122)	Microsoft ACPI-Compliant System
	(ISA) 0x0000007B (123)	Microsoft ACPI-Compliant System
	(ISA) 0x0000007C (124)	Microsoft ACPI-Compliant System
	(ISA) 0x0000007D (125)	Microsoft ACPI-Compliant System
	(ISA) 0x0000007E (126)	Microsoft ACPI-Compliant System
	(ISA) 0x0000007F (127)	Microsoft ACPI-Compliant System
	(ISA) 0x00000080 (128)	Microsoft ACPI-Compliant System
	(ISA) 0x00000081 (129)	Microsoft ACPI-Compliant System
	(ISA) 0x00000082 (130)	Microsoft ACPI-Compliant System
	(ISA) 0x00000083 (131)	Microsoft ACPI-Compliant System
	(ISA) 0x00000084 (132)	Microsoft ACPI-Compliant System
	(ISA) 0x00000085 (133)	Microsoft ACPI-Compliant System
	(ISA) 0x00000086 (134)	Microsoft ACPI-Compliant System
	(ISA) 0x00000087 (135)	Microsoft ACPI-Compliant System
	(ISA) 0x00000088 (136)	Microsoft ACPI-Compliant System
	(ISA) 0x00000089 (137)	Microsoft ACPI-Compliant System
	(ISA) 0x0000008A (138)	Microsoft ACPI-Compliant System
	(ISA) 0x0000008B (139)	Microsoft ACPI-Compliant System
	(ISA) 0x0000008C (140)	Microsoft ACPI-Compliant System
	(ISA) 0x0000008D (141)	Microsoft ACPI-Compliant System
	(ISA) 0x0000008E (142)	Microsoft ACPI-Compliant System
	(ISA) 0x0000008F (143)	Microsoft ACPI-Compliant System
	(ISA) 0x00000090 (144)	Microsoft ACPI-Compliant System
	(ISA) 0x00000091 (145)	Microsoft ACPI-Compliant System
	(ISA) 0x00000092 (146)	Microsoft ACPI-Compliant System
	(ISA) 0x00000093 (147)	Microsoft ACPI-Compliant System
	(ISA) 0x00000094 (148)	Microsoft ACPI-Compliant System
	(ISA) 0x00000095 (149)	Microsoft ACPI-Compliant System
	(ISA) 0x00000096 (150)	Microsoft ACPI-Compliant System
	(ISA) 0x00000097 (151)	Microsoft ACPI-Compliant System
	(ISA) 0x00000098 (152)	Microsoft ACPI-Compliant System
	(ISA) 0x00000099 (153)	Microsoft ACPI-Compliant System
	(ISA) 0x0000009A (154)	Microsoft ACPI-Compliant System
	(ISA) 0x0000009B (155)	Microsoft ACPI-Compliant System
	(ISA) 0x0000009C (156)	Microsoft ACPI-Compliant System
	(ISA) 0x0000009D (157)	Microsoft ACPI-Compliant System
	(ISA) 0x0000009E (158)	Microsoft ACPI-Compliant System
	(ISA) 0x0000009F (159)	Microsoft ACPI-Compliant System
	(ISA) 0x000000A0 (160)	Microsoft ACPI-Compliant System
	(ISA) 0x000000A1 (161)	Microsoft ACPI-Compliant System
	(ISA) 0x000000A2 (162)	Microsoft ACPI-Compliant System
	(ISA) 0x000000A3 (163)	Microsoft ACPI-Compliant System
	(ISA) 0x000000A4 (164)	Microsoft ACPI-Compliant System
	(ISA) 0x000000A5 (165)	Microsoft ACPI-Compliant System
	(ISA) 0x000000A6 (166)	Microsoft ACPI-Compliant System
	(ISA) 0x000000A7 (167)	Microsoft ACPI-Compliant System
	(ISA) 0x000000A8 (168)	Microsoft ACPI-Compliant System
	(ISA) 0x000000A9 (169)	Microsoft ACPI-Compliant System
	(ISA) 0x000000AA (170)	Microsoft ACPI-Compliant System
	(ISA) 0x000000AB (171)	Microsoft ACPI-Compliant System
	(ISA) 0x000000AC (172)	Microsoft ACPI-Compliant System
	(ISA) 0x000000AD (173)	Microsoft ACPI-Compliant System

(ISA) 0x000000AE (174)	Microsoft ACPI-Compliant System
(ISA) 0x000000AF (175)	Microsoft ACPI-Compliant System
(ISA) 0x000000B0 (176)	Microsoft ACPI-Compliant System
(ISA) 0x000000B1 (177)	Microsoft ACPI-Compliant System
(ISA) 0x000000B2 (178)	Microsoft ACPI-Compliant System
(ISA) 0x000000B3 (179)	Microsoft ACPI-Compliant System
(ISA) 0x000000B4 (180)	Microsoft ACPI-Compliant System
(ISA) 0x000000B5 (181)	Microsoft ACPI-Compliant System
(ISA) 0x000000B6 (182)	Microsoft ACPI-Compliant System
(ISA) 0x000000B7 (183)	Microsoft ACPI-Compliant System
(ISA) 0x000000B8 (184)	Microsoft ACPI-Compliant System
(ISA) 0x000000B9 (185)	Microsoft ACPI-Compliant System
(ISA) 0x000000BA (186)	Microsoft ACPI-Compliant System
(ISA) 0x000000BB (187)	Microsoft ACPI-Compliant System
(ISA) 0x000000BC (188)	Microsoft ACPI-Compliant System
(ISA) 0x000000BD (189)	Microsoft ACPI-Compliant System
(ISA) 0x000000BE (190)	Microsoft ACPI-Compliant System
(PCI) 0x0000000A (10)	Intel(R) N10/ICH7 Family SMBus Controller - 27DA
(PCI) 0x00000010 (16)	Intel(R) N10/ICH7 Family PCI Express Root Port - 27D0
(PCI) 0x00000010 (16)	Intel(R) N10/ICH7 Family USB Universal Host Controller - 27CB
(PCI) 0x00000011 (17)	Intel(R) N10/ICH7 Family PCI Express Root Port - 27D2
(PCI) 0x00000012 (18)	Intel(R) N10/ICH7 Family PCI Express Root Port - 27D4
(PCI) 0x00000012 (18)	Intel(R) N10/ICH7 Family USB Universal Host Controller - 27CA
(PCI) 0x00000013 (19)	Intel(R) N10/ICH7 Family PCI Express Root Port - 27D6
(PCI) 0x00000013 (19)	Intel(R) N10/ICH7 Family Serial ATA Storage Controller - 27C0
(PCI) 0x00000013 (19)	Intel(R) N10/ICH7 Family USB Universal Host Controller - 27C9
(PCI) 0x00000016 (22)	High Definition Audio Controller
(PCI) 0x00000017 (23)	Intel(R) N10/ICH7 Family USB Universal Host Controller - 27C8
(PCI) 0x00000017 (23)	Intel(R) N10/ICH7 Family USB2 Enhanced Host Controller - 27CC
(PCI) 0xFFFFFFFF (-4)	Realtek PCIe GBE Family Controller #2
(PCI) 0xFFFFFFFF (-3)	Realtek PCIe GBE Family Controller
(PCI) 0xFFFFFFFF (-2)	Intel(R) Graphics Media Accelerator 3600 Series

4.4 DMA Channel Assignments

Direct memory access (DMA)	
4	Direct memory access controller