

Notice

This guide is designed for experienced users to setup the system in the shortest time.

Safety Precautions

Warning!



Always completely disconnect the power cord from your board whenever you are working on it. Do not make connections while the power is on, because a sudden rush of power can damage sensitive electronic components.

Caution!



Always ground yourself to remove any static charge before touching the board. Modern electronic devices are very sensitive to static electric charges. Use a grounding wrist strap at all times. Place all electronic components on a static-dissipative surface or in a static-shielded bag when they are not in the chassis

OZONE SAFE



RECYCLABLE

A Message to the Customer

First of all, thank you for purchasing PFM-P13DW2 PC/104 Power Supply. This Quick Installation Guide will help you on the process of the installation. Please read it thoroughly before you start to install it. The product comes with a sheet of warranty for two years assurances except for improper use. Therefore, we strongly suggest you to read and refer to the Quick Installation Guide before any installation. You may visit AAEON website for the latest version of the instruction. Please refer to <http://www.aaeon.com>

Product Warranty

AAEON Customer Services

All products in AAEON are designed as the strictest specifications to ensure that the products will own the reliable performance in the typical industrial environments. Whether your purchase from AAEON is made to the purpose of the laboratory or the factory facility, you can be assured that every purchase in AAEON will provide the reliability and stability of operation.

Your satisfaction is our primary concern. Here is a guide for AAEON's customer services. Ensure you get the full benefits of our services, please follow the instructions below step by step.

Technical Support

We require you to get the maximum performance from your products.

If you run into technical difficulties, we'll be here always for you. For the most frequently asked questions, you can easily find solutions in your product documentation. The guide is detailed specification, so please refer to it first. Therefore, we suggest strongly that you can read it before asking for a customer service over the phone. If you still cannot find the answer, gather all questions you can think of and have the product at hand before giving a call to your dealer. All dealers of AAEON are well-trained and ready to provide you as many supports as we can. Based on the customer service we've

encountered until now, most of problems are minor and able to be easily solved over the phone. In addition, free-charged technical support is available from AAEON engineers in the office time. We are always pleased to give advice regarding to any installation and operation for AAEON products.

Content

A Message to the Customer	2
Product Warranty	3
1.1 Features.....	6
1.2 Specifications.....	6
1.3 Location of Connectors.....	7
1.4 Mechanical Drawing	7
1.5 List of Connectors.....	8
1.6 PCI-104 Connector (CN1)	9
1.7 Power Input Connector (CN2)	9
1.8 VCC5/12V Output Connector (CN3).....	9
1.9 PC/104 Connector (CN5)	9
1.10 LED Function	9


1.1 Features

- 50W Output
- +7V to 30V Input Range
- PC/104 Compliant


1.2 Specifications

- Power Input +7V to 30V
- Power Output +5V, +12V DC/ 50Watts
- Board Size 3.55" (L) x 3.775" (W) (90mm x 96mm)
- Operating Temperature -40°F ~185°F(-40°C ~85°C)

1.3 Location of Connectors

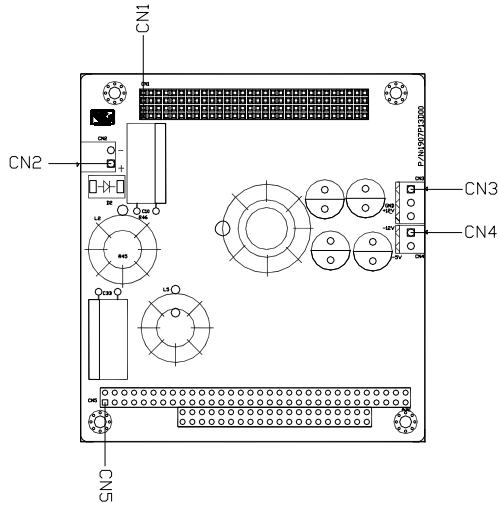

1.4 Mechanical Drawing

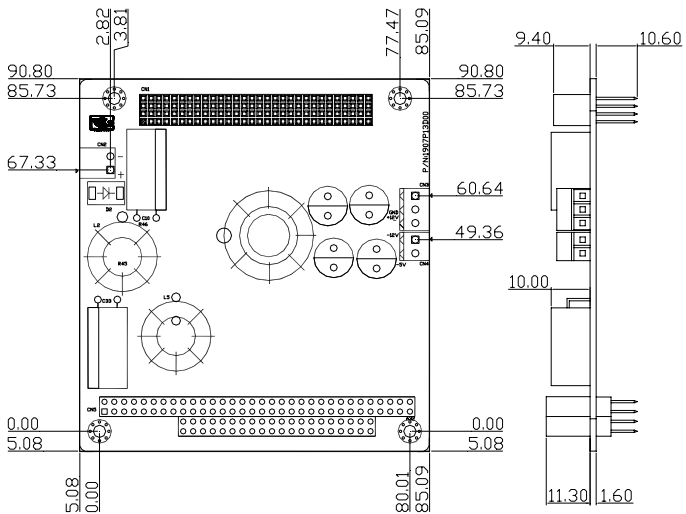

1.5 List of Connectors

The board has a number of connectors that allow you to configure your system to suit your application. The table below shows the function of each board's connectors:

Label	Function
CN1	PCI-104 Connector
CN2	Power Input Connector
CN3	+5V/+12V Output Connector
CN5	PC104 Connector
D15	+5V LED
D18	+12V LED

1.6 PCI-104 Connector (CN1)

Standard PCI-104 Connector

1.7 Power Input Connector (CN2)

Pin	Signal
1	Vin (7V~30V)
2	GND

1.8 VCC5/12V Output Connector (CN3)

Pin	Signal
1	+5V
2	GND
3	+12V

1.9 PC/104 Connector (CN5)

Standard PC/104 Connector

1.10 LED Function

Pin	Signal
D15	+5V
D18	+12V

Below Table for China RoHS Requirements

产品中有害有毒物质或元素名称及含量

AAEON Main Board/ Daughter Board/ Backplane

部件名称	有害有毒物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
印刷电路板 及其电子组件	×	○	○	○	○	○
外部信号 连接器及线材	×	○	○	○	○	○
<p>O: 表示该有害有毒物质在该部件所有均质材料中的含量均在 SJ/T 11363-2006 标准规定的限量要求以下。</p> <p>X: 表示该有害有毒物质至少在该部件的某一均质材料中的含量超出 SJ/T 11363-2006 标准规定的限量要求。</p> <p>备注: 此产品所标示之环保使用期限, 系指在一般正常使用状况下。</p>						