

PICO-KBU4-SEMI

PICO-SEMI System

User's Manual 3rd Ed

Copyright Notice

This document is copyrighted, 2020. All rights are reserved. The original manufacturer reserves the right to make improvements to the products described in this manual at any time without notice.

No part of this manual may be reproduced, copied, translated, or transmitted in any form or by any means without the prior written permission of the original manufacturer. Information provided in this manual is intended to be accurate and reliable. However, the original manufacturer assumes no responsibility for its use, or for any infringements upon the rights of third parties that may result from its use.

The material in this document is for product information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, AAEMON assumes no liabilities resulting from errors or omissions in this document, or from the use of the information contained herein

AAEMON reserves the right to make changes in the product design without notice to its users.

Acknowledgement

All other products' name or trademarks are properties of their respective owners.

- Microsoft Windows® is a registered trademark of Microsoft Corp.
- Intel® is a registered trademark of Intel Corporation
- Core™ is a trademarked product name of Intel Corporation.
- ITE is a trademark of Integrated Technology Express, Inc.
- IBM, PC/AT, PS/2, and VGA are trademarks of International Business Machines Corporation.

All other product names or trademarks are properties of their respective owners.

Ownership is not assumed nor implied by the publisher of this document for products or product names not herein listed.

Packing List

Before setting up your product, please make sure the following items have been shipped:

Item	Quantity
● PICO-KBU4-SEMI	1

If any of these items are missing or damaged, please contact your distributor or sales representative immediately.

About this Document

This User's Manual contains all the essential information, such as detailed descriptions and explanations on the product's hardware and software features (if any), its specifications, dimensions, jumper/connector settings/definitions, and driver installation instructions (if any), to facilitate users in setting up their product.

Users may refer to the product page at AAEON.com for the latest version of this document.

Safety Precautions

Please read the following safety instructions carefully. It is advised that you keep this manual for future references

1. All cautions and warnings on the device should be noted.
2. Make sure the power source matches the power rating of the device.
3. Position the power cord so that people cannot step on it. Do not place anything over the power cord.
4. Always completely disconnect the power before working on the system's hardware.
5. No connections should be made when the system is powered as a sudden rush of power may damage sensitive electronic components.
6. If the device is not to be used for a long time, disconnect it from the power supply to avoid damage by transient over-voltage.
7. Always disconnect this device from any AC supply before cleaning.
8. While cleaning, use a damp cloth instead of liquid or spray detergents.
9. Make sure the device is installed near a power outlet and is easily accessible.
10. Keep this device away from humidity.
11. Place the device on a solid surface during installation to prevent falls
12. Do not cover the openings on the device to ensure optimal heat dissipation.
13. Watch out for high temperatures when the system is running.
14. Do not touch the heat sink or heat spreader when the system is running
15. Never pour any liquid into the openings. This could cause fire or electric shock.
16. As most electronic components are sensitive to static electrical charge, be sure to ground yourself to prevent static charge when installing the internal components. Use a grounding wrist strap and contain all electronic components in any static-shielded containers.

17. If any of the following situations arises, please contact our service personnel:
 - i. Damaged power cord or plug
 - ii. Liquid intrusion to the device
 - iii. Exposure to moisture
 - iv. Device is not working as expected or in a manner as described in this manual
 - v. The device is dropped or damaged
 - vi. Any obvious signs of damage displayed on the device
18. **DO NOT LEAVE THIS DEVICE IN AN UNCONTROLLED ENVIRONMENT WHERE THE STORAGE TEMPERATURE IS BELOW -20°C (-4°F) OR ABOVE 60°C (140°F) TO PREVENT DAMAGE.**

Warning!



This device complies with Part 15 FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received including interference that may cause undesired operation.

Caution:

There is a danger of explosion if the battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer's instructions and your local government's recycling or disposal directives.

Attention:

Il y a un risque d'explosion si la batterie est remplacée de façon incorrecte. Ne la remplacer qu'avec le même modèle ou équivalent recommandé par le constructeur. Recycler les batteries usées en accord avec les instructions du fabricant et les directives gouvernementales de recyclage.

China RoHS Requirements (CN)

产品中有毒有害物质或元素名称及含量

AAEON System

QO4-381 Rev.A0

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯 醚(PBDE)
印刷电路板 及其电子组件	×	○	○	○	○	○
外部信号 连接器及线材	×	○	○	○	○	○
外壳	○	○	○	○	○	○
中央处理器 与内存	×	○	○	○	○	○
硬盘	×	○	○	○	○	○
液晶模块	×	×	○	○	○	○
光驱	×	○	○	○	○	○
触控模块	×	○	○	○	○	○
电源	×	○	○	○	○	○
电池	×	○	○	○	○	○

本表格依据 SJ/T 11364 的规定编制。

○：表示该有毒有害物质在该部件所有均质材料中的含量均在 GB/T 26572 标准规定的限量要求以下。

×：表示该有害物质的某一均质材料超出了 GB/T 26572 的限量要求，然而该部件

仍符合欧盟指令 2011/65/EU 的规范。

备注：

- 一、此产品所标示之环保使用期限，系指在一般正常使用状况下。
- 二、上述部件物质中央处理器、内存、硬盘、光驱、电源为选购品。
- 三、上述部件物质液晶模块、触控模块仅一体机产品适用。

Hazardous and Toxic Materials List

AAEON System

QO4-381 Rev.A0

Component Name	Hazardous or Toxic Materials or Elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (Cr(VI))	Polybrominated biphenyls (PBBs)	Polybrominated ethers (PBDEs)
PCB and Components	X	O	O	O	O	O
Wires & Connectors for Ext.Connections	X	O	O	O	O	O
Chassis	O	O	O	O	O	O
CPU & RAM	X	O	O	O	O	O
HDD Drive	X	O	O	O	O	O
LCD Module	X	X	O	O	O	O
Optical Drive	X	O	O	O	O	O
Touch Control Module	X	O	O	O	O	O
PSU	X	O	O	O	O	O
Battery	X	O	O	O	O	O

This form is prepared in compliance with the provisions of SJ/T 11364.

O: The level of toxic or hazardous materials present in this component and its parts is below the limit specified by GB/T 26572.

X: The level of toxic of hazardous materials present in the component exceed the limits specified by GB/T 26572, but is still in compliance with EU Directive 2011/65/EU (RoHS 2).

Notes:

1. The Environment Friendly Use Period indicated by labelling on this product is applicable only to use under normal conditions.
2. Individual components including the CPU, RAM/memory, HDD, optical drive, and PSU are optional.
3. LCD Module and Touch Control Module only applies to certain products which feature these components.

Table of Contents

Chapter 1 - Product Specifications	1
1.1 Specifications	2
Chapter 2 – Hardware Information	4
2.1 Dimensions	5
2.2 Jumpers and Connectors.....	8
2.3 List of Jumpers	11
2.3.1 Clear CMOS Jumper (JP5)	11
2.3.2 Auto Power Button Enable/Disable Selection (JP5)	11
2.4 List of Connectors.....	12
2.4.1 RTC Battery Connector (CN1)	13
2.4.2 HDMI (CN2).....	13
2.4.3 LAN (RJ-45) Port1 (CN6)	15
2.4.4 LAN (RJ-45) Port2 (CN7).....	16
2.4.5 USB 2.0 Port 1/2 (CN10)	17
2.4.6 USB 2.0/3.0 Port 3 Port 3/4 (CN11).....	18
2.4.7 Front Panel Port (CN15).....	19
2.4.8 COM Port1/ COM Port2 (CN16)	20
2.4.9 LPC Port (CN19)	22
2.4.10 +12V DC Jack (CN23)	23
2.4.11 M.2 (Key B) Connector (CN26)	23
2.4.12 Smart FAN Connector (CN27)	26
2.4.13 M.2 (Key E) Connector (CN30)	26
2.4.14 DDR4 SO-DIMM Slot (DIMM1)	29
2.5 Function Block.....	29
Chapter 3 - AMI BIOS Setup	30
3.1 System Test and Initialization	31

3.2	AMI BIOS Setup	32
3.3	Setup Submenu: Main	33
3.4	Setup Submenu: Advanced.....	34
3.4.1	CPU configuration.....	35
3.4.2	SATA Configuration	37
3.4.3	Hardware Monitor	38
3.4.3.1	CPU Smart Fan Mode Configuration	39
3.4.4	SIO Configuration	40
3.4.4.1	Serial Port Configuration	41
3.4.5	USB Configuration.....	42
3.4.6	Digital IO Port Configuration	43
3.4.7	Power management	44
3.4.8	Firmware Update Configuration.....	45
3.5	Setup submenu: Chipset.....	46
3.5.1	System Agent (SA) Configuration.....	47
3.5.1.1	Graphics Configuration	48
3.5.1.1.1	LVDS Panel Configuration	49
3.5.2	PCH-IO Configuration.....	51
3.6	Setup submenu: Security	52
3.7	Setup submenu: Boot.....	53
3.7.1	BBS Priorities.....	54
3.8	Setup submenu: Exit	55
Chapter 4 – Drivers Installation.....		56
4.1	Driver Download/Installation	57
Appendix A - Watchdog Timer Programming.....		59
A.1	Watchdog Timer Registers	60
A.2	Watchdog Sample Program.....	61
Appendix B - I/O Information		64

B.1	I/O Address Map	65
B.2	Memory Address Map	66
B.3	IRQ Mapping Chart.....	67
Appendix C – Mating Connectors		68
C.1	List of Mating Connectors and Cables.....	69
Appendix D – DIO		70
D.1	DIO	71

Chapter 1

Product Specifications

1.1 Specifications

System

Form Factor	PICO-ITX
Processor	7th Intel® Core™ processor U series
System Memory	DDR4 SODIMM Slot x 1
Chipset	Intel® SOC
Ethernet	GbE x 2, Realtek RTL8111E-VL-CG
BIOS	AMI BIOS
Wake on LAN	Yes
Watchdog Timer	Yes
Expansion Interface	M.2 2230 E key (For WIFI/BT Module)
Power Requirement	Normal: +12V
Power Consumption	I7-7600 with DDR4 16GB, 12V at 2.3A
System Size	4.8" x 3.15" x 2" (122mm x 72mm x 50mm)
Operation Temp.	32°F~ 122°F (0°C ~ 50°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 70°C)
Humidity	0% ~ 90% relative humidity, non-condensing
MTBF	163,000

Display

Chipset	Intel® SOC
Video Output	HDMI 1.4
Touch	-

I/O

Storage	M.2 2230 B key
USB	USB3.0 x 2 (Rear IO)
Audio	Optional
TPM	-
Serial Port	RS-232 x 1, RS-232422/485 x1 (Optional)

Certification


Certification	CE, FCC
---------------	---------

Chapter 2

Hardware Information


2.1 Dimensions

System

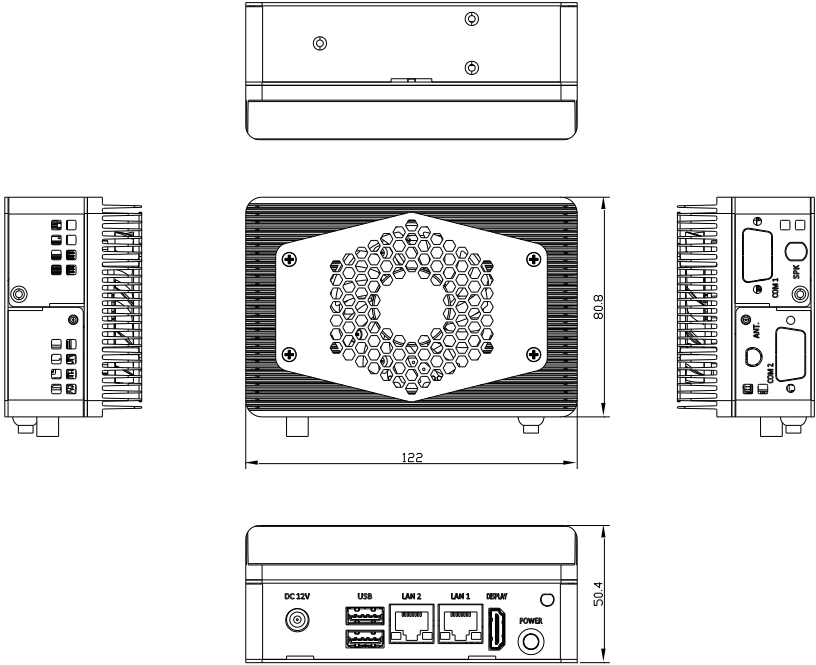


Board


Component Side

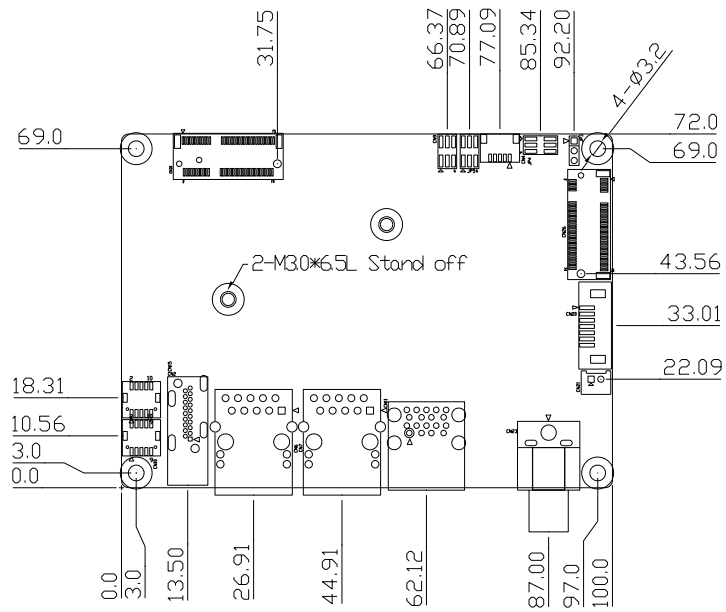

Component Side

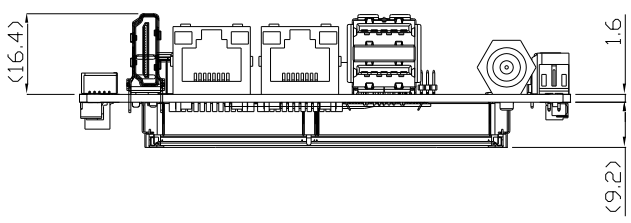


Solder Side

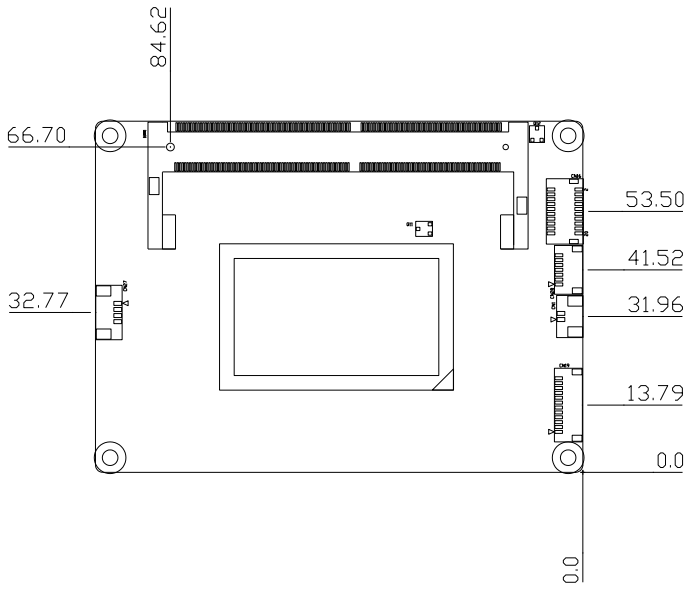

Solder Side


2.2 Jumpers and Connectors

System

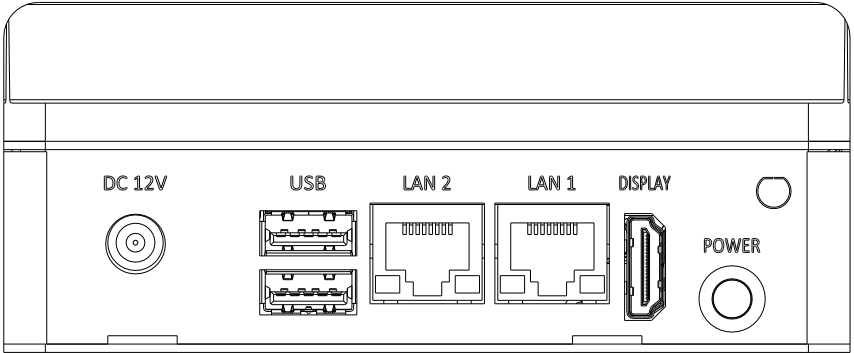


Board


Component Side

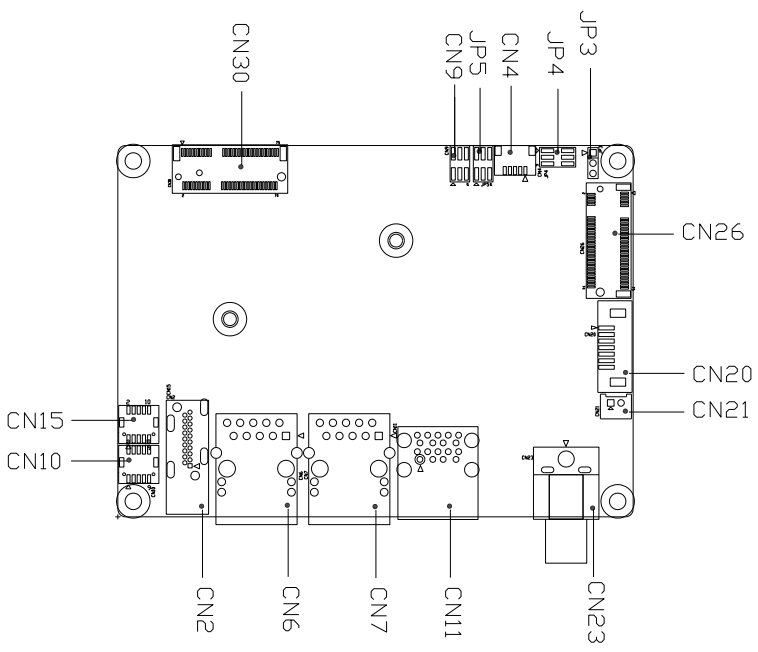

Component Side

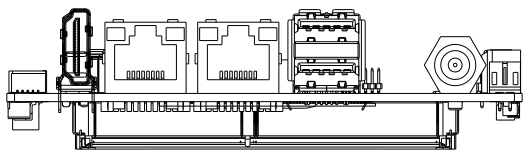

Solder Side

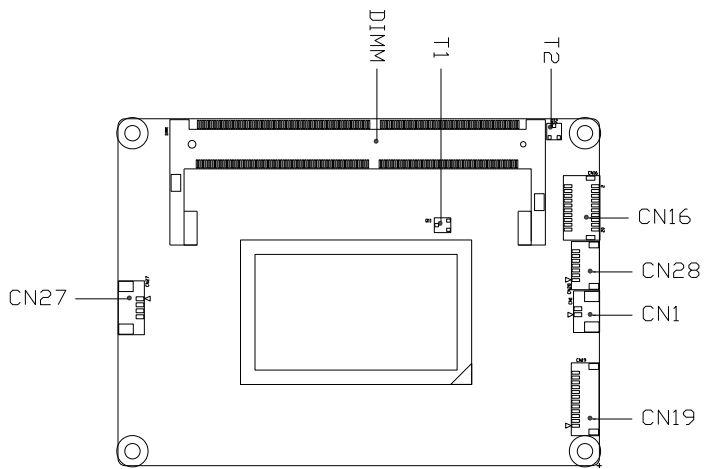


Solder Side

2.3 List of Jumpers


Please refer to the table below for all of the board's jumpers that you can configure for your application

Label	Function
JP5	Clear CMOS Jumper Auto Power Button Enable/Disable Selection

2.3.1 Clear CMOS Jumper (JP5)




Normal (Default)




Clear CMOS

2.3.2 Auto Power Button Enable/Disable Selection (JP5)



Enable Auto Power Button




**Disable Auto Power Button
(Default)**

2.4 List of Connectors

Please refer to the table below for all of the board's connectors that you can configure for your application


Label	Function
CN1	RTC Battery Connector
CN2	HDMI
CN6	LAN (RJ-45) Port1
CN7	LAN (RJ-45) Port2
CN10	USB 2.0 Port 1/2
CN11	USB 2.0/3.0 Port 3 Port 0/1
CN15	Front Panel
CN16	COM Port1/ COM Port2
CN19	LPC Port
CN23	+12V DC Jack
CN26	M.2 (Key B) Connector
CN27	Smart FAN Connector
CN30	M.2 (Key E) Connector
DIMM1	DDR4 SO-DIMM Slot

2.4.1 RTC Battery Connector (CN1)



Pin	Pin Name	Signal Type	Pin Name
1	+3.3V	PWR	+3.3V
2	GND	GND	GND


2.4.2 HDMI (CN2)

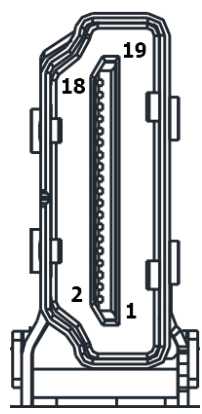

Pin	Pin Name	Signal Type	Signal level
1	HDMI_TX2+	DIFF	
2	GND	GND	GND
3	HDMI_TX2-	DIFF	


Pin	Pin Name	Signal Type	Signal level
4	HDMI_TX1+	DIFF	
5	GND	GND	GND
6	HDMI_TX1-	DIFF	
7	HDMI_TX0+	DIFF	
8	GND	GND	GND
9	HDMI_TX0-	DIFF	
10	HDMI_CLK+	DIFF	
11	GND	GND	GND
12	HDMI_CLK-	DIFF	
13	NC		
14	NC		
15	DDC_CLK	I/O	+5V
16	DDC_DATA	I/O	+5V
17	GND	GND	GND
18	+5V	PWR	+5V
19	HDMI_HPD		

2.4.3 LAN (RJ-45) Port1 (CN6)

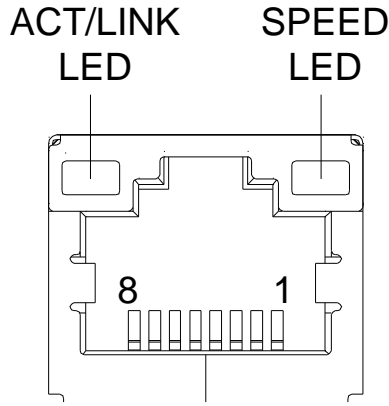


Pin	Pin Name	Signal Type	Signal Level
1	MDI0+	DIFF	
2	MDI0-	DIFF	
3	MDI1+	DIFF	
4	MDI2+	DIFF	
5	MDI2-	DIFF	
6	MDI1-	DIFF	
7	MDI3+	DIFF	
8	MDI3-	DIFF	

2.4.4 LAN (RJ-45) Port2 (CN7)

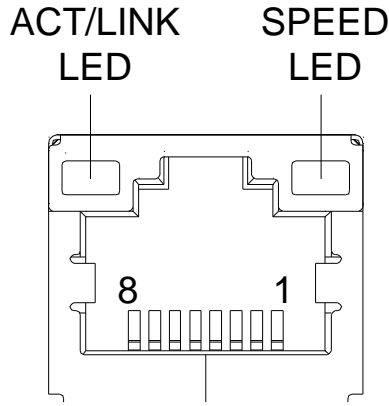


Pin	Pin Name	Signal Type	Signal Level
1	MDI0+	DIFF	
2	MDI0-	DIFF	
3	MDI1+	DIFF	
4	MDI2+	DIFF	
5	MDI2-	DIFF	
6	MDI1-	DIFF	
7	MDI3+	DIFF	
8	MDI3-	DIFF	

2.4.5 USB 2.0 Port 1/2 (CN10)

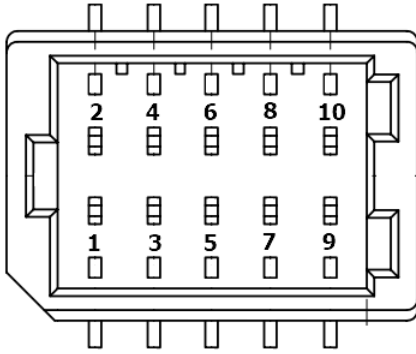


Pin	Pin Name	Signal Type	Signal Level
1	+V5SB	PWR	+5V
2	+V5SB	PWR	+5V
3	USB1_D-	DIFF	
4	USB2_D-	DIFF	
5	USB1_D+	DIFF	
6	USB2_D+	DIFF	
7	GND	GND	GND
8	GND	GND	GND
9	GND	GND	GND
10	GND	GND	GND

2.4.6 USB 2.0/3.0 Port 3 Port 3/4 (CN11)

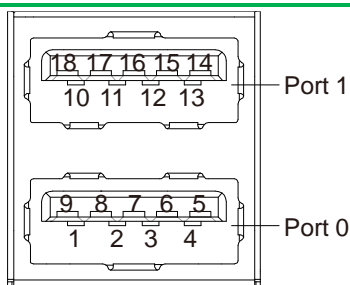


Pin	Pin Name	Signal Type	Signal Level
1	+V5SB	PWR	+5V
2	USB3_D-	DIFF	
3	USB3_D+	DIFF	
4	GND	GND	GND
5	USB3_SSRX-	DIFF	
6	USB3_SSRX+	DIFF	
7	GND	GND	GND
8	USB3_SSTX-	DIFF	
9	USB3_SSTX+	DIFF	
10	+V5SB	PWR	+5V
11	USB4_D-	DIFF	
12	USB4_D+	DIFF	
13	GND	GND	GND
14	USB4_SSRX-	DIFF	
15	USB4_SSRX+	DIFF	
16	GND	GND	GND
17	USB4_SSTX-	DIFF	
18	USB4_SSTX+	DIFF	

2.4.7 Front Panel Port (CN15)

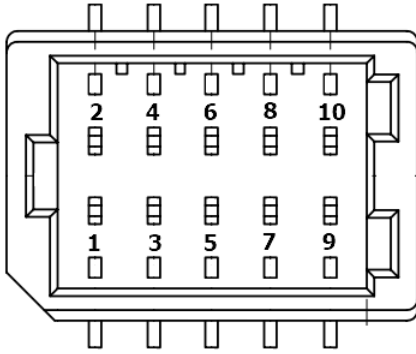

Pin	Pin Name	Signal Type	Signal level
1	GND	GND	GND
2	EXT_PWRBTN#	IN	
3	SATA_LED-	OUT	
4	SATA_LED+	OUT	
5	BUZZER-	OUT	
6	BUZZER+	OUT	
7	GND	GND	GND
8	PWR_LED+	OUT	
9	GND	GND	GND
10	HWRST#	IN	

2.4.8 COM Port1/ COM Port2 (CN16)

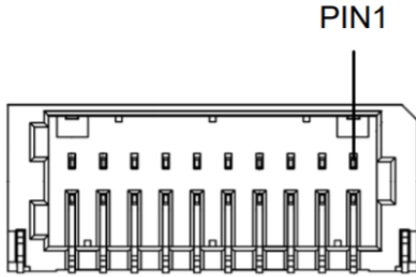

Pin	Pin Name	Signal Type	Signal Level
1	LOUT_L	OUT	
2	LOUT_R	OUT	
3	GND	GND	GND
4	AGND	GND	GND
5	DCDA	IN	
6	DCDB	IN	
7	RXA	IN	
8	RXB	IN	
9	TXA	OUT	±9V
10	TXB	OUT	±9V
11	DTRA	OUT	±9V
12	DTRB	OUT	±9V
13	DSRA	IN	
14	DSRB	IN	
15	RTSA	OUT	±9V
16	RTSB	OUT	±9V
17	CTSA	IN	
18	CTSB	IN	

Pin	Pin Name	Signal Type	Signal Level
19	RIA/+5V/+12V	IN/ PWR	+5V/+12V
20	RIB/+5V/+12V	IN/ PWR	+5V/+12V

COM Port 2 RS-422

Pin	Pin Name	Signal Type	Signal Level
3	GND	GND	GND
6	RS422_TX-	OUT	±5V
8	RS422_TX+	OUT	±5V
10	RS422_RX+	IN	
12	RS422_RX-	IN	


COM Port 2 RS-485

Pin	Pin Name	Signal Type	Signal Level
3	GND	GND	GND
6	RS485_D-	I/O	±5V
8	RS485_D+	I/O	±5V

※ COM2 RS-232/422/485 can be set by BIOS setting. Default is RS-232.


※ COM2 RI/+5V/+12V function can be set by BOM(R317-RI/R316-+12V/R318-+5V)

2.4.9 LPC Port (CN19)

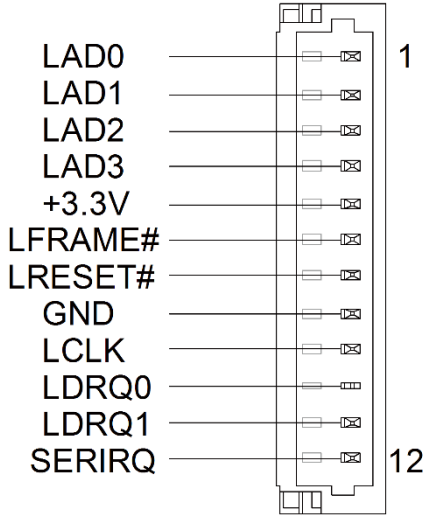

Pin	Pin Name	Signal Type	Signal Level
1	LAD0	IN/OUT	+3.3V
2	LAD1	IN/OUT	+3.3V
3	LAD2	IN/OUT	+3.3V
4	LAD3	IN/OUT	+3.3V
5	+V3.3S	PWR	+3.3V
6	LFRAME#	IN	
7	LRESET#	OUT	+3.3V
8	GND	GND	GND
9	LCLK	OUT	
10	SMB_DATA/ I2C_SDA	IN/OUT	
11	SMB_CLK/ I2C_CLK	OUT	
12	SMB_ALERT/ INT_SERIRQ	IN	+3.3V

2.4.10 +12V DC Jack (CN23)



Pin	Pin Name	Signal Type	Signal Level
1	+12V	PWR	+12V
2	GND	GND	GND


2.4.11 M.2 (Key B) Connector (CN26)

Pin	Pin Name	Signal Type	Signal Level
1	GND	GND	GND
2	+V3.3S	PWR	+3.3V
3	GND	GND	GND
4	+V3.3S	PWR	+3.3V
5	GND	GND	GND
6	NC	NC	
7	USB2P_10	IN/OUT	
8	W_DISABLE0#	OUT	
9	USB2N_10	IN/OUT	
10	SSD_LED#	IN	
11	GND	GND	GND
20	NC	NC	
21	GND	GND	GND
22	NC	NC	
23	NC	NC	
24	NC	NC	

Pin	Pin Name	Signal Type	Signal Level
25	NC	NC	
26	NC	NC	
27	GND	GND	GND
28	NC	NC	
29	PCIE11_RXN	DIFF	
30	NC	NC	
31	PCIE11_RXP	DIFF	
32	NC	NC	
33	GND	GND	GND
34	NC	NC	
35	PCIE11_TXN	DIFF	
36	NC	NC	
37	PCIE11_TXP	DIFF	
38	NC	NC	
39	GND	GND	GND
40	NC	NC	
41	SATA2_RXP	DIFF	
42	NC	NC	
43	SATA2_RXN	DIFF	
44	NC	NC	
45	GND	GND	GND
46	NC	NC	
47	SATA2_TXN	DIFF	
48	NC	NC	
49	SATA2_TXP	DIFF	
50	BUF_PLT_RST#	OUT	

Pin	Pin Name	Signal Type	Signal Level
51	GND	GND	GND
52	PCIE_CLK_REQ3#	IN	
53	PCIE3_CLKN	DIFF	
54	PCIE_WAKE#	IN	
55	PCIE3_CLKP	DIFF	
56	NC	NC	
57	GND	GND	GND
58	NC	NC	
59	NC	NC	
60	NC	NC	
61	NC	NC	
62	NC	NC	
63	NC	NC	
64	NC	NC	
65	NC	NC	
66	NC	NC	
67	NC	NC	
68	NC	NC	
69	GND	GND	GND
70	+V3.3S	PWR	+3.3V
71	GND	GND	GND
72	+V3.3S	PWR	+3.3V
73	GND	GND	GND
74	+V3.3S	PWR	+3.3V
75	NC	NC	

2.4.12 Smart FAN Connector (CN27)

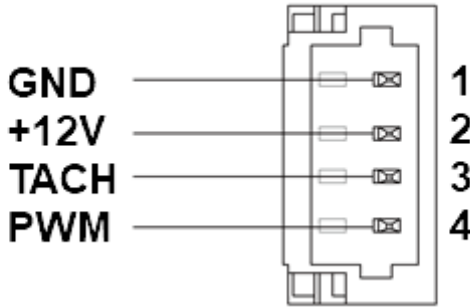

Pin	Pin Name	Signal Type	Signal Level
1	GND	GND	GND
2	+V3.3S	PWR	+12V
3	TACH	IN	
4	PWM	OUT	

2.4.13 M.2 (Key E) Connector (CN30)

Pin	Pin Name	Signal Type	Signal Level
1	GND	GND	GND
2	+V3.3A	PWR	+3.3V
3	USB2P_5	IN/OUT	
4	+V3.3A	PWR	+3.3V
5	USB2N_5	IN/OUT	
6	NC	NC	
7	GND	GND	GND
8	NC	NC	
9	NC	NC	

Pin	Pin Name	Signal Type	Signal Level
10	NC	NC	
11	NC	NC	
12	NC	NC	
13	NC	NC	
14	NC	NC	
15	NC	NC	
16	NC	NC	
17	NC	NC	
18	NC	NC	
19	NC	NC	
20	NC	NC	
21	NC	NC	
22	NC	NC	
23	NC	NC	
32	NC	NC	
33	GND	GND	GND
34	NC	NC	
35	PCIE1_TXP	DIFF	
36	NC	NC	
37	PCIE1_TXN	DIFF	
38	NC	NC	
39	GND	GND	GND
40	NC	NC	
41	PCIE1_RXP	DIFF	
42	NC	NC	
43	PCIE1_RXN	DIFF	


Pin	Pin Name	Signal Type	Signal Level
44	NC	NC	
45	GND	GND	GND
46	NC	NC	
47	PCIE1_CLKP	DIFF	
48	NC	NC	
49	PCIE1_CLKN	DIFF	
50	NC	NC	
51	GND	GND	GND
52	BUF_PLT_RST#	OUT	
53	PCIE_CLK_REQ1#	IN	
54	W_DISABLE1#	OUT	
55	PCIE_WAKE#	IN	
56	W_DISABLE2#	OUT	
57	GND	GND	GND
58	NC	NC	
59	NC	NC	
60	NC	NC	
61	NC	NC	
62	NC	NC	
63	GND	GND	GND
64	NC	NC	
65	NC	NC	
66	NC	NC	
67	NC	NC	
68	NC	NC	
69	GND	GND	GND

Pin	Pin Name	Signal Type	Signal Level
70	NC	NC	
71	NC	NC	
72	+V3.3S	PWR	+3.3V
73	NC	NC	
74	+V3.3S	PWR	+3.3V
75	GND	GND	GND

2.4.14 DDR4 SO-DIMM Slot (DIMM1)

Standard specification

2.5 Function Block

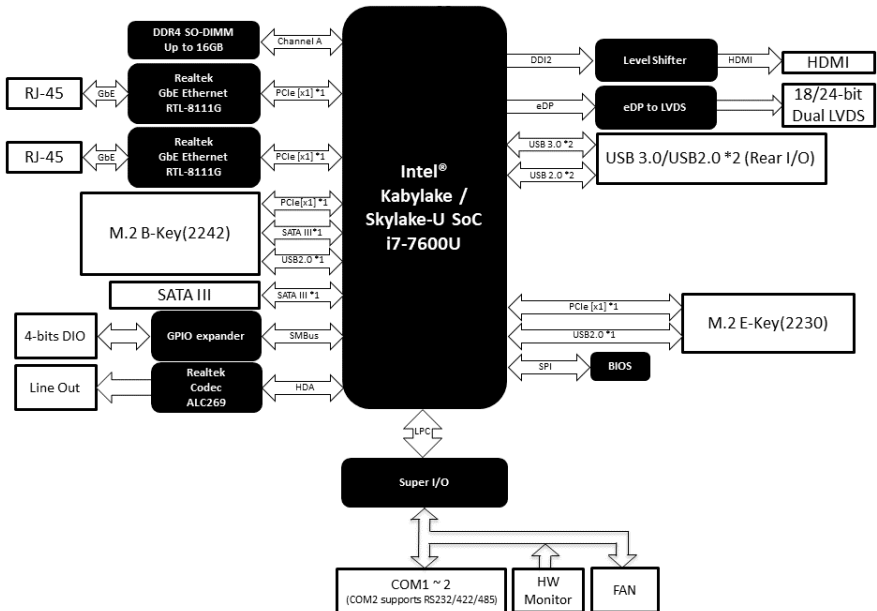

Chapter 3

AMI BIOS Setup

3.1 System Test and Initialization

These routines test and initialize board hardware. If the routines encounter an error during the tests, you will either hear a few short beeps or see an error message on the screen. There are two kinds of errors: fatal and non-fatal. The system can usually continue the boot up sequence with non-fatal errors.

System configuration verification

These routines check the current system configuration stored in the CMOS memory and BIOS NVRAM. If system configuration is not found or system configuration data error is detected, system will load optimized default and re-boot with this default system configuration automatically.

There are four situations in which you will need to setup system configuration:

1. You are starting your system for the first time
2. You have changed the hardware attached to your system
3. The system configuration is reset by Clear-CMOS jumper
4. The CMOS memory has lost power and the configuration information has been erased.

The PICO-KBU4-SEMI CMOS memory has an integral lithium battery backup for data retention. However, you will need to replace the complete unit when it finally runs down.

3.2 AMI BIOS Setup

AMI BIOS ROM has a built-in Setup program that allows users to modify the basic system configuration. This type of information is stored in battery-backed CMOS RAM and BIOS NVRAM so that it retains the Setup information when the power is turned off.

Entering Setup

Power on the computer and press or <ESC> immediately. This will allow you to enter Setup.

Main

Set the date, use tab to switch between date elements.

Advanced

Enable/disable boot option for legacy network devices.

Chipset

Host bridge parameters.

Boot

Enables/disables quiet boot option.

Security

Set setup administrator password.


Save & Exit

Exit system setup after saving the changes.


3.3 Setup Submenu: Main



3.4 Setup Submenu: Advanced

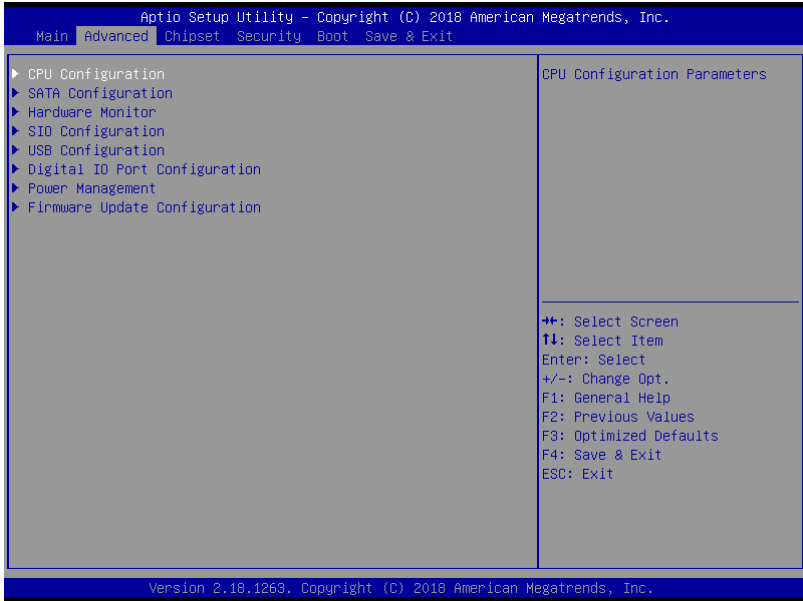

3.4.1 CPU configuration

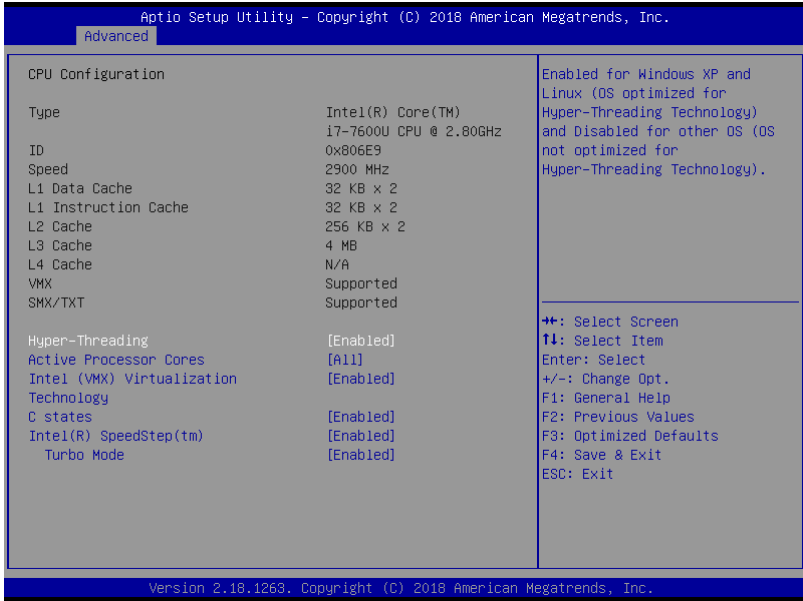


Options summary:

Hyper-Threading	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable for Linux and Disabled for other OS.		
Active Processor Cores	All	Optimal Default, Failsafe Default
	1	
Number of cores to enable in each processor package.		
Intel (VMX) Virtualization Technology	Disabled	
	Enabled	Optimal Default, Failsafe Default
When enabled, a VMM can utilize the additional hardware capabilities provided by Vanderpool Technology.		
CPU C states	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable/Disable CPU power Management. Allows CPU to go to C states when it's not 100% utilized.		
Intel® SpeedStep™	Disabled	

	Enabled	Optimal Default, Failsafe Default
Allows more than two frequency ranges to be supported.		
Turbo Mode	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable/Disable processor turbo mode. AUTO means enabled, unless max turbo ratio is bigger than 16 – SKL A0 W/A		


3.4.2 SATA Configuration

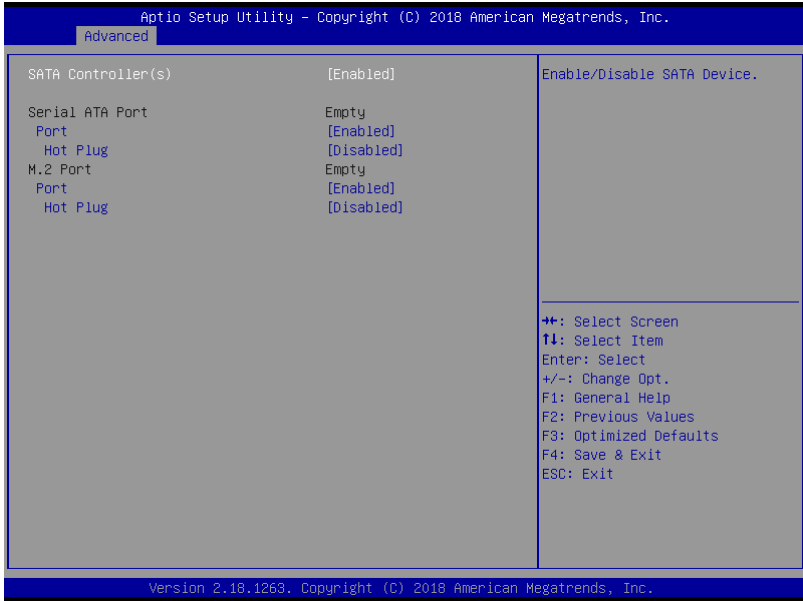


Options summary:

SATA Controller(s)	Enabled	Optimal Default, Failsafe Default
	Disabled	
Enable or disable SATA Device.		
Port X	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable or Disable SATA Port.		
Hot Plug	Disabled	Optimal Default, Failsafe Default
	Enabled	
Designates this port as Hot Pluggable.		

3.4.3 Hardware Monitor

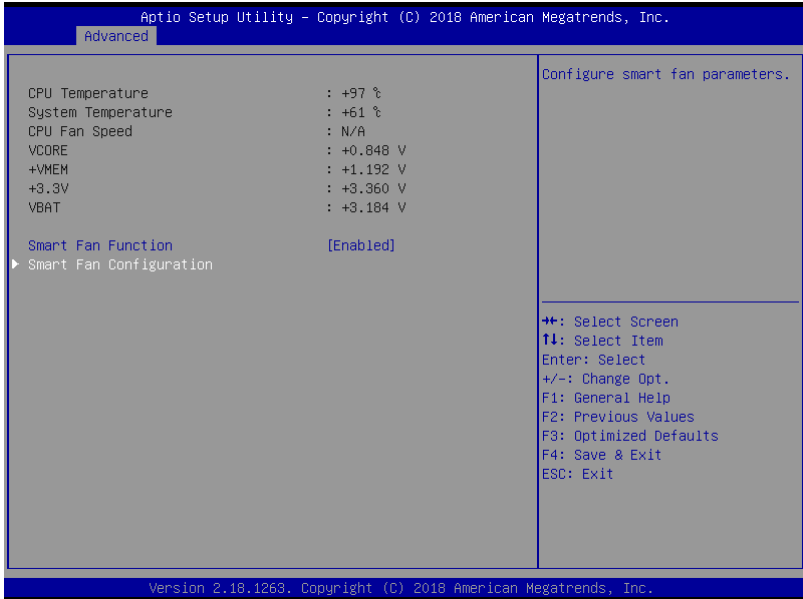


3.4.3.1 CPU Smart Fan Mode Configuration

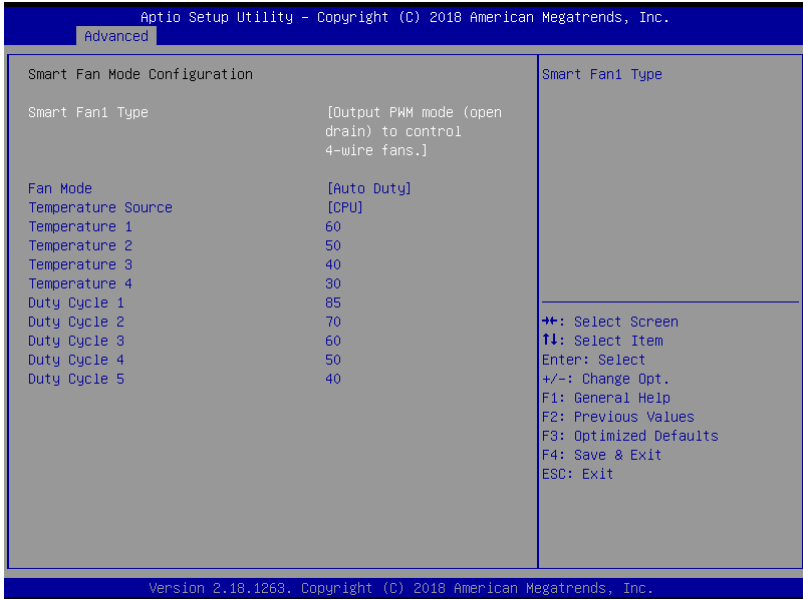


Options summary:

Smart Fan1 Type	Use linear fan application circuit.	
	Output PWM mode (open drain) to control 4-wire fans.	Optimal Default, Failsafe Default
Smart fan type		
Fan Mode	Manual Duty	
	Auto Duty	Optimal Default, Failsafe Default
Smart fan mode		
Temperature Source	CPU	Optimal Default, Failsafe Default
Select the monitored temperature source for this fan.		

3.4.4 SIO Configuration

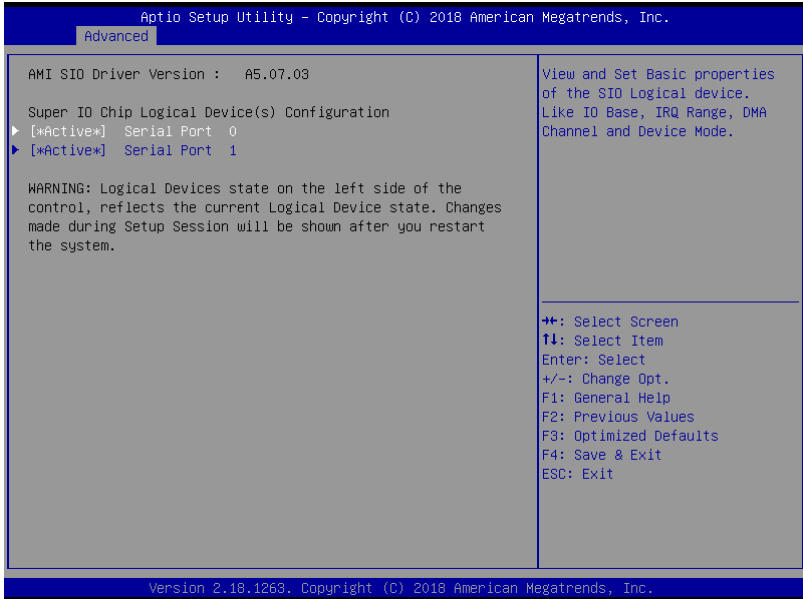


3.4.4.1 Serial Port Configuration

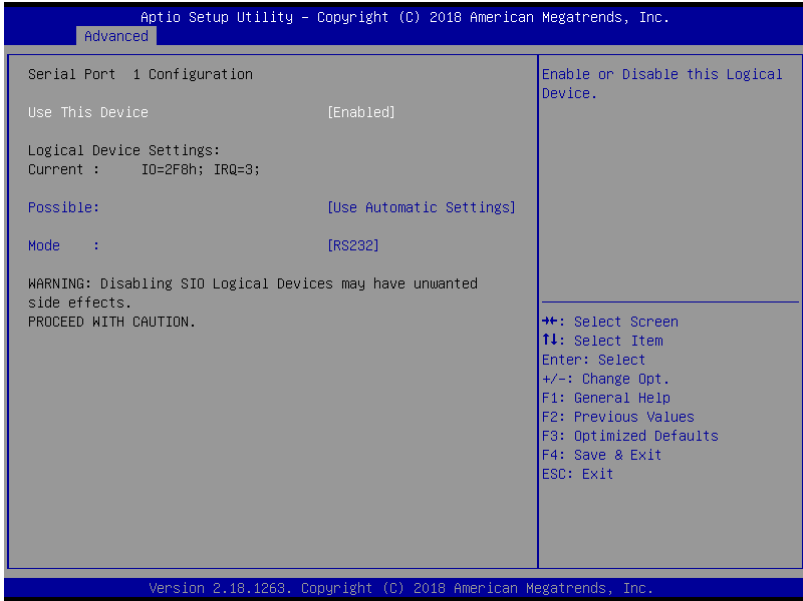

Options summary:

Use This Device	Disabled	Optimal Default, Failsafe Default
	Enabled	
En/Disable Serial Port (COM)		
Possible:	Use Automatic Settings	Optimal Default, Failsafe Default
	IO=2F8; IRQ=3;	
	IO=3F8; IRQ=4;	
Select an optimal setting for IO device		
Mode:	RS232	Optimal Default, Failsafe Default
	RS422;	
	RS485	
UART 232/422/485 selection		


3.4.5 USB Configuration

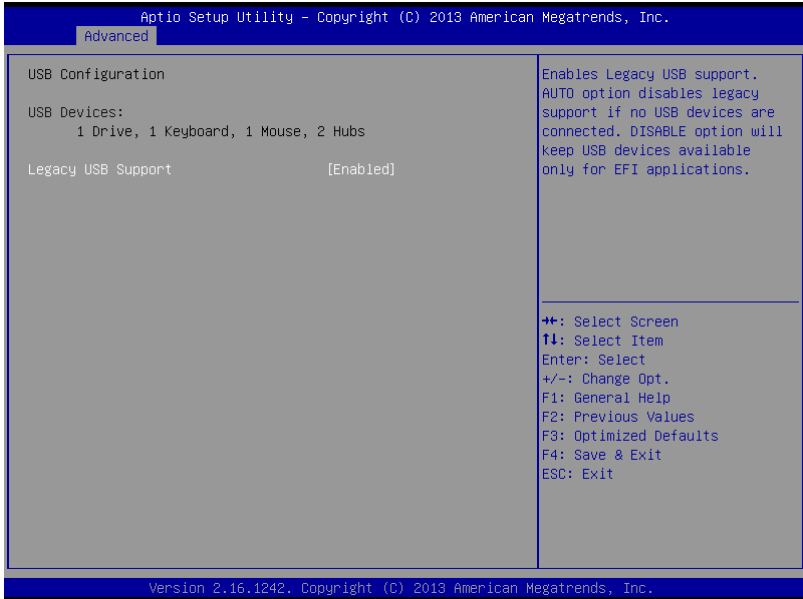

Options summary:

Legacy USB Support	Enabled	Optimal Default, Failsafe Default
	Disabled	
	Auto	
Enables BIOS Support for Legacy USB Support. When enabled, USB can be functional in legacy environment like DOS. AUTO option disables legacy support if no USB devices are connected		
Device Name (Emulation Type)	Auto	Optimal Default, Failsafe Default
	Floppy	
	Forced FDD	
	Hard Disk CDROM	
If Auto. USB devices less than 530MB will be emulated as Floppy and remaining as Floppy and remaining as hard drive. Forced FDD option can be used to force a HDD formatted drive to boot as FDD(Ex. ZIP drive)		
USB Port 0/1 function routing	FCH USB port 8/9	Optimal Default, Failsafe Default
	FCH USB port 0/1	


3.4.6 Digital IO Port Configuration

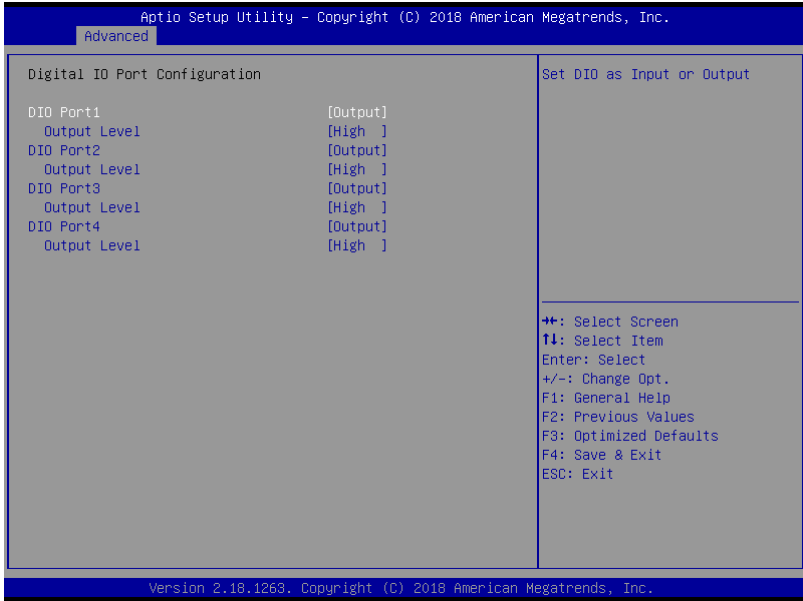

Options summary:

DIO Port*	Output	
	Input	
Set DIO as Input or Output		
Output Level	High	Optimal Default, Failsafe Default
	Low	
Set output level when DIO pin is output		


3.4.7 Power management

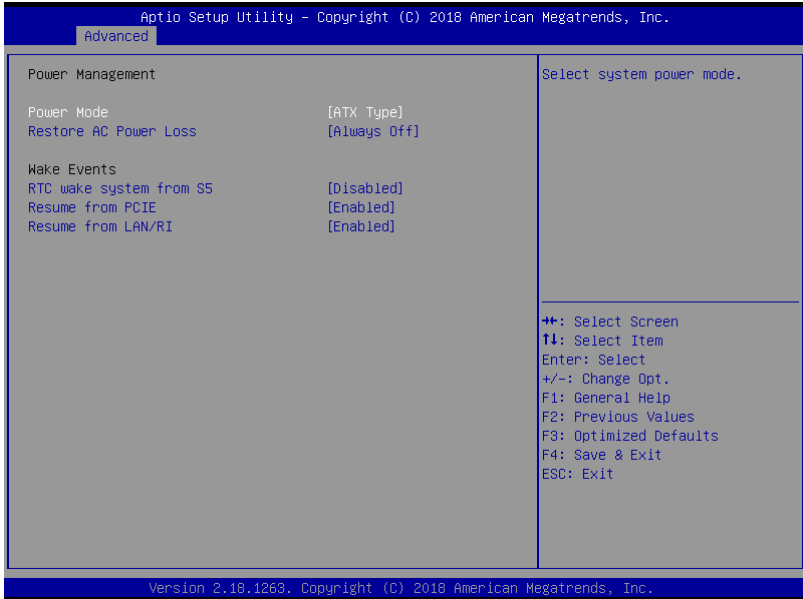

Options summary:

Power Mode	ATX Type	Optimal Default, Failsafe Default
	AT Type	
Select power supply mode.		
Restore on Power Loss	Last State	Optimal Default, Failsafe Default
	Always On	
	Always Off	
Select power state when power is re-applied after a power failure.		
RTC wake system from S5	Disabled	Optimal Default, Failsafe Default
	Fixed Time	
Enable or disable System wake on alarm event. When enabled, System will wake on the hr::min::sec specified		
Resume from PCIE	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enable/Disable resume from PCIE		
Resume form LAN/RI	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enable/Disable resume from PCIE		


3.4.8 Firmware Update Configuration

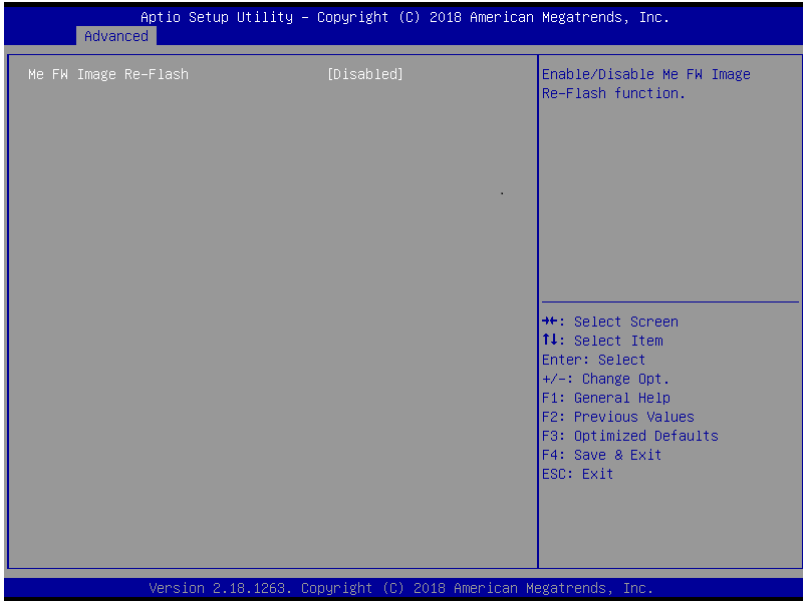

Options summary:

Me FW Image	Disabled	Optimal Default, Failsafe Default
Re-Flash	Enabled	
Enable/Disable Me FW Image Re-Flash function.		


3.5 Setup submenu: Chipset

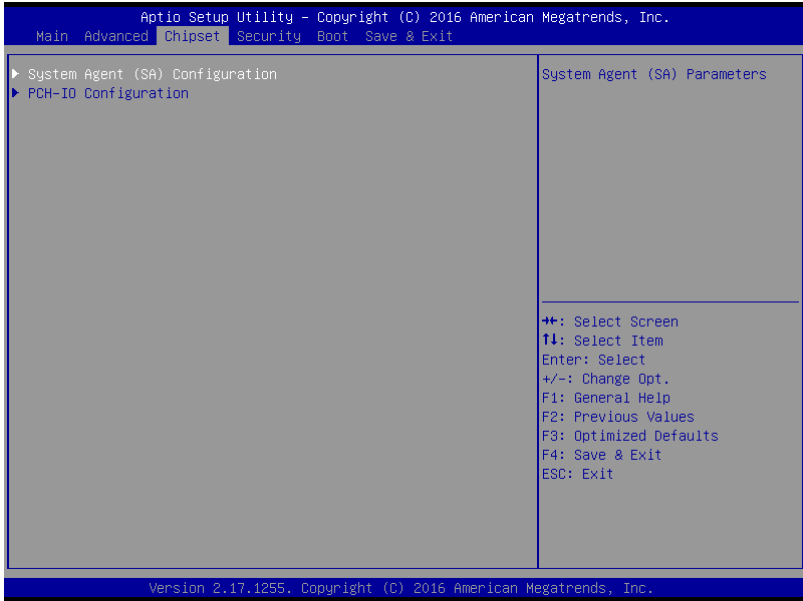

3.5.1 System Agent (SA) Configuration




3.5.1.1 Graphics Configuration

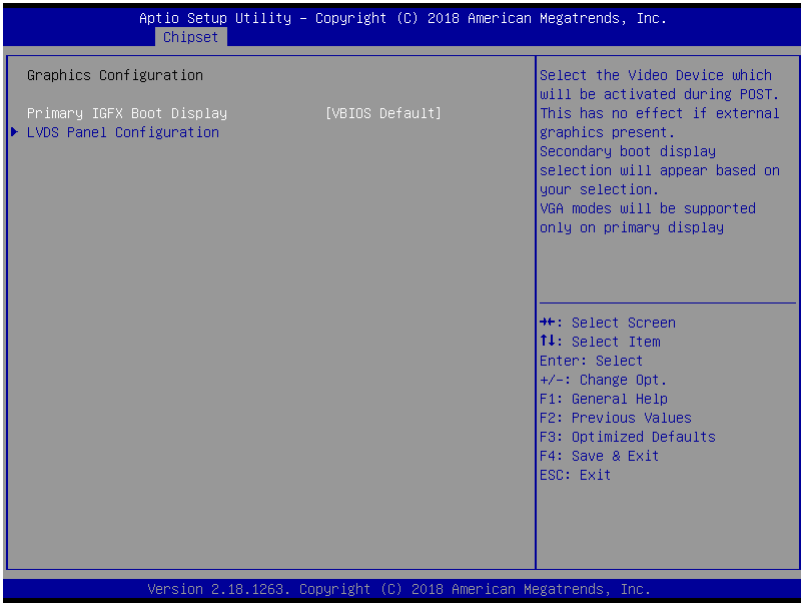

Options summary:

Primary IGFX Boot Display	VBIOS Default	Optimal Default, Failsafe Default
	HDMI	
	LVDS	
<p>Select the Video Device which will be activated during POST. This has no effect if external graphic present. Secondary boot display selection will appear based on your selection.</p>		

3.5.1.1.1 LVDS Panel Configuration

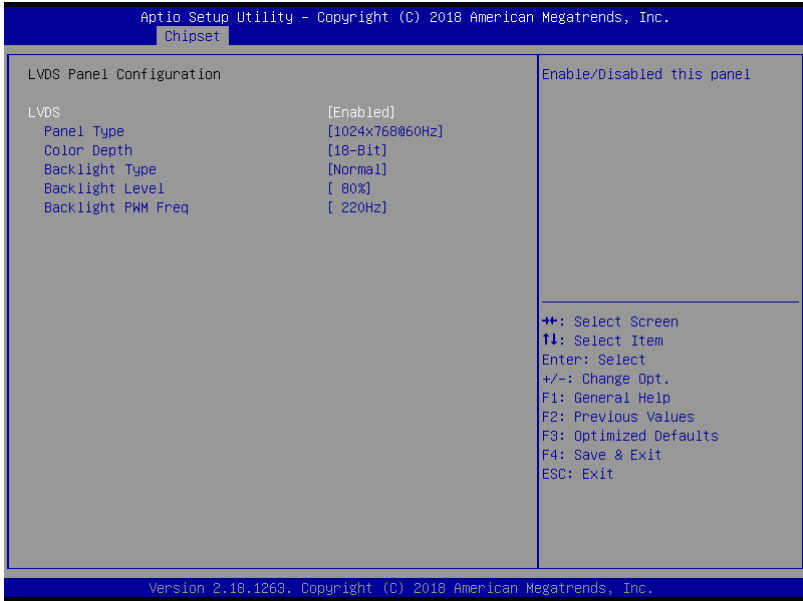

Options summary:

LVDS	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enable/Disabled this panel.		
LVDS Panel Type	640x480,18bit,60Hz	Optimal Default, Failsafe Default
	800x480,18bit,60Hz	
	800x600,18bit,60Hz	
	1024x600,18bit,60Hz	
	1024x768,18bit,60Hz	
	1024x768,24bit,60Hz	
	1280x768,24bit,60Hz	
	1280x1024,48bit,60Hz	
	1366x768,24bit,60Hz	
	1440x900,48bit,60Hz	
	1600x1200,48bit,60Hz	
	1920x1080,48bit,60Hz	
	1920x1200,48bit,60Hz	

Select LCD panel used by Internal Graphics Device by selecting the appropriate setup item.

Color Depth	18-bit	Optimal Default, Failsafe Default
	24-bit	
	36-bit	
	48-bit	

Select panel type

Backlight Type	Normal	Optimal Default, Failsafe Default
	Inverted	

Select backlight control signal type


Backlight Level	0%	Optimal Default, Failsafe Default
	10%	
	20%	
	30%	
	40%	
	50%	
	60%	
	70%	
	80%	
	90%	
100%		

Select backlight control level

Backlight PWM Freq	100Hz	Optimal Default, Failsafe Default
	200Hz	
	220Hz	
	500Hz	
	1KHz	
	2.2KHz	
	6.5KHz	

Select PWM frequency of backlight control signal


3.5.2 PCH-IO Configuration

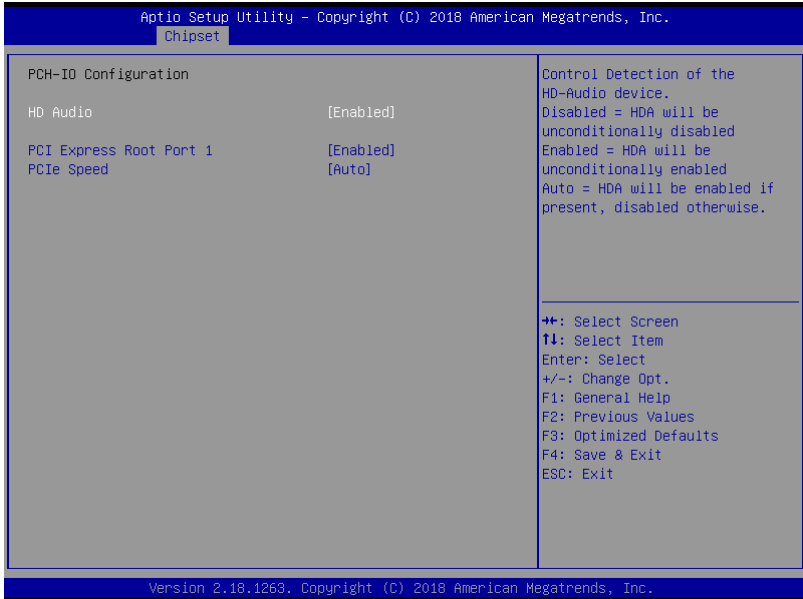

Options summary:

HD Audio	Disabled	Optimal Default, Failsafe Default
	Enabled	
Control Detection of the HD-Audio device. Disabled = HDA will be unconditionally disabled Enabled = HDA will be unconditionally enabled Auto = HDA will be enabled if present, disabled otherwise.		
PCI Express Root Port 1	Enabled	Optimal Default, Failsafe Default
	Disabled	
Enable or disable PCI Express Root Port 1		
PCIe Lane* Gen Speed	Auto	Optimal Default, Failsafe Default
	Gen1	
	Gen2	
	Gen3	
Select PCI Express port speed.		

3.6 Setup submenu: Security

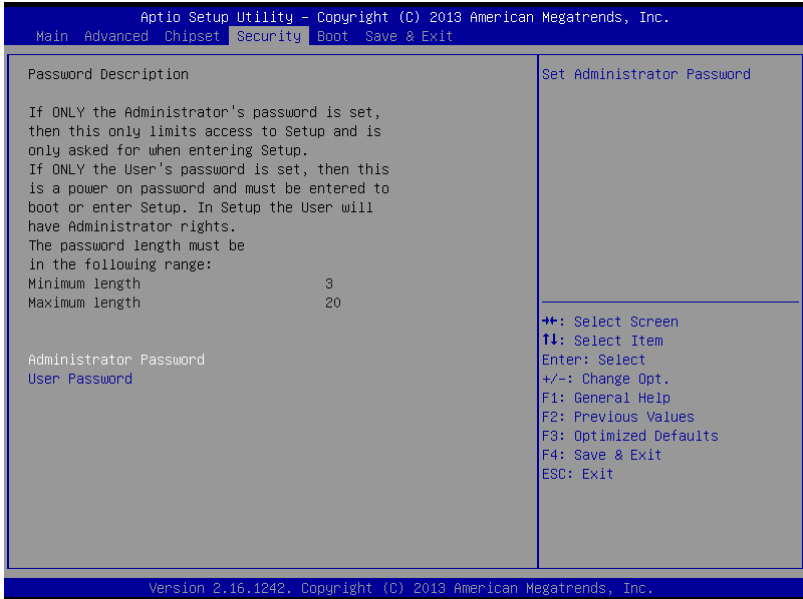

Change User/Supervisor Password


You can install a Supervisor password, and if you install a supervisor password, you can then install a user password. A user password does not provide access to many of the features in the Setup utility.

If you highlight these items and press Enter, a dialog box appears which lets you enter a password. You can enter no more than six letters or numbers. Press Enter after you have typed in the password. A second dialog box asks you to retype the password for confirmation. Press Enter after you have retyped it correctly. The password is required at boot time, or when the user enters the Setup utility.

Removing the Password

Highlight this item and type in the current password. At the next dialog box press Enter to disable password protection.


3.7 Setup submenu: Boot

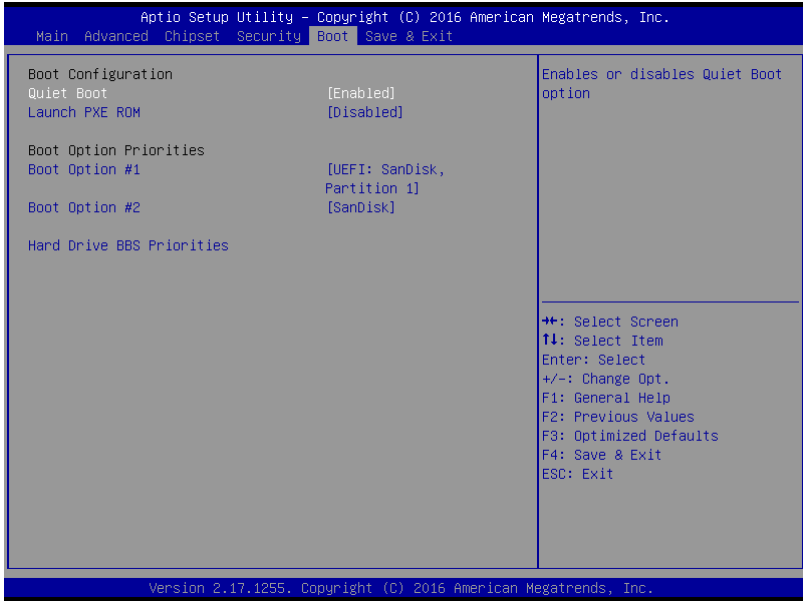


Options summary:

Quiet Boot	Disabled	Optimal Default, Failsafe Default
	Enabled	
En/Disable showing boot logo.		
Launch PXE OpROM	Disabled	Optimal Default, Failsafe Default
	Enabled	
Controls the execution of UEFI and Legacy PXE OpROM		

3.7.1 BBS Priorities

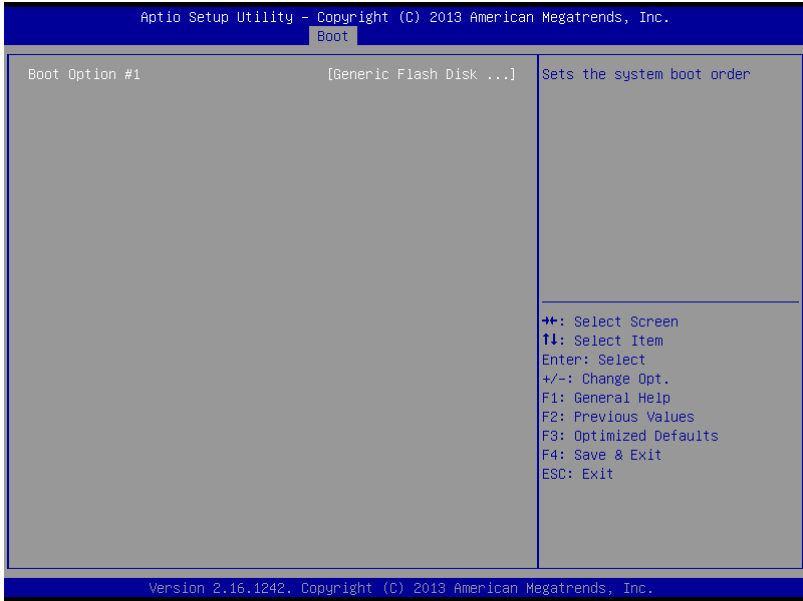

3.8 Setup submenu: Exit

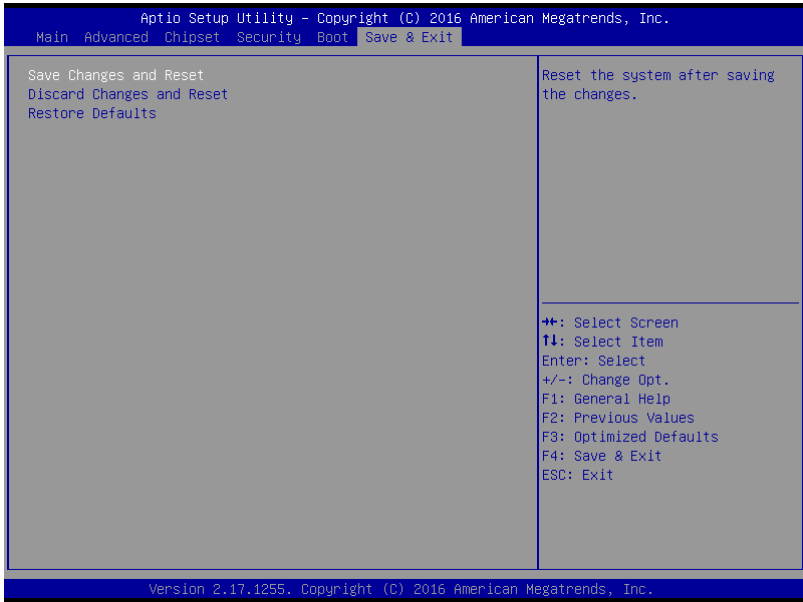

Chapter 4

Drivers Installation

4.1 Driver Download/Installation

Drivers for the PICO-KBU4-SEMI can be downloaded from the product page on the AAEON website by following this link:

<https://www.aaeon.com/en/p/pico-itx-boards-pico-kbu4>

Download the driver(s) you need and follow the steps below to install them.

Step 1 – Install Chipset Driver

1. Open the **STEP1 - CHIPSET** folder and open the **SetupChipset.exe** file
2. Follow the instructions
3. Drivers will be installed automatically

Step 2 – Install Graphic Driver

1. Open the **STEP2 - Graphic** folder and open the **Setup.exe** file
2. Follow the instructions
3. Driver will be installed automatically

Step 3 – Install LAN Driver

1. Open the **STEP3 - LAN** folder and select your OS
2. Open the **.exe** file in the folder
3. Follow the instructions
4. Driver will be installed automatically

Step 4 – Install Audio Driver

1. Open the **STEP4 - Audio** folder and select your OS
2. Open the Setup.exe file
3. Follow the instructions
4. Driver will be installed automatically

Step 5 – Install Serial Port Driver (Optional)

1. Open the **STEP5 – Serial Port Driver** folder and select your OS
2. Open the .exe file
3. Follow the instructions
4. Driver will be installed automatically

Step 6 – Install USB3.0 Driver

1. Open the **STEP6 – USB3.0** folder and select your OS
2. Open the .exe file
3. Follow the instructions
4. Driver will be installed automatically

Appendix A

Watchdog Timer Programming

A.1 Watchdog Timer Registers

Table 1 : Watch dog relative IO address		
	Default Value	Note
I/O Base Address	0x2E	I/O Base address for Watchdog operation. This address is assigned by SIO LDN7

Table 2 : Watchdog relative register table				
Register	Offset	BitNum	Value	Note
Watchdog WDRST# Enable	0x00	7	1	Enable/Disable time out output via WDRST# 0: Disable 1: Enable
Pulse Width	0x05	0:1	01	Width of Pulse signal 00: 1ms (do not use) 01: 25ms 10: 125ms 11: 5s Pulse width is must longer then 16ms.
Signal Polarity	0x05	2	0	0: low active 1: high active Must set this bit to 0
Counting Unit	0x05	3	0	Select time unit. 0: second 1: minute
Output Signal Type	0x05	4	1	0: Level 1: Pulse Must set this bit to 1
Watchdog Timer Enable	0x05	5	1	0: Disable 1: Enable
Timeout Status	0x05	6	1	1: timeout occurred. Write a 1 to clear timeout status
Timer Counter	0x06			Time of watchdog timer (0~255)

A.2 Watchdog Sample Program

```
*****
// WDT I/O operation relative definition (Please reference to Table 1)
#define WDTAddr    0x510 // WDT I/O base address
Void WDTWriteByte(byte Register, byte Value);
byte WDTReadByte(byte Register);
Void WDTSetReg(byte Register, byte Bit, byte Val);
// Watch Dog relative definition (Please reference to Table 2)
#define DevReg     0x00 // Device configuration register
    #define WDRstBit 0x80 // Watchdog WDTRST# (Bit7)
    #define WDRstVal 0x80 // Enabled WDTRST#
#define TimerReg   0x05 // Timer register
    #define PSWidthBit 0x00 // WDTRST# Pulse width (Bit0:1)
    #define PSWidthVal 0x01 // 25ms for WDTRST# pulse
    #define PolarityBit 0x02 // WDTRST# Signal polarity (Bit2)
    #define PolarityVal 0x00 // Low active for WDTRST#
    #define UnitBit    0x03 // Unit for timer (Bit3)
    #define ModeBit    0x04 // WDTRST# mode (Bit4)
    #define ModeVal    0x01 // 0:level 1: pulse
    #define EnableBit  0x05 // WDT timer enable (Bit5)
    #define EnableVal  0x01 // 1: enable
    #define StatusBit  0x06 // WDT timer status (Bit6)
#define CounterReg 0x06 // Timer counter register
*****

*****
VOID Main() {
    // Procedure : AaeonWDTConfig
    // (byte)Timer : Counter of WDT timer.(0x00~0xFF)
    // (boolean)Unit : Select time unit(0: second, 1: minute).
    EnterSIOconfig();
    SetWDT();
    AaeonWDTConfig(Counter, Unit);
    // Procedure : AaeonWDTEnable
    // This procedure will enable the WDT counting.
    AaeonWDTEnable();
    ExitSIOconfig();
}
*****
```

```

*****
// Procedure : AaeonWDTEnable
VOID EnterSIOconfig (){
    IOWriteByte (IoConfAddr,0x87);
    IOWriteByte (IoConfAddr,0x87);
}

VOID ExitSIOconfig (){
    IOWriteByte (IoConfAddr,0xAA);
}

VOID SetWDT ()
    IOWriteByte (IoConfAddr,0x2B);
    IOWriteByte(IoConfAddr+1, (IOReadByte(IoConfAddr+1)&0xFC));
}

// Procedure : AaeonWDTEnable
VOID AaeonWDTEnable (){
    WDTEnableDisable(1);
}

// Procedure : AaeonWDTConfig
VOID AaeonWDTConfig (byte Counter, BOOLEAN Unit){
    // Disable WDT counting
    WDTEnableDisable(0);
    // Clear Watchdog Timeout Status
    WDTClearTimeoutStatus();
    // WDT relative parameter setting
    WDTParameterSetting(Timer, Unit);
}

VOID WDTEnableDisable(byte Value){
    If (Value == 1)
        WDTSetBit(TimerReg, EnableBit, 1);
    else
        WDTSetBit(TimerReg, EnableBit, 0);
}

VOID WDTParameterSetting(byte Counter, BOOLEAN Unit){
    // Watchdog Timer counter setting
    WDTWriteByte(CounterReg, Counter);
    // WDT counting unit setting

```

```

    WDTSetBit(TimerReg, UnitBit, Unit);
    // WDT output mode set to pulse
    WDTSetBit(TimerReg, ModeBit, ModeVal);
    // WDT output mode set to active low
    WDTSetBit(TimerReg, PolarityBit, PolarityVal);
    // WDT output pulse width is 25ms
    WDTSetBit(TimerReg, PSWidthBit, PSWidthVal);
    // Watchdog WDTRST# Enable
    WDTSetBit(DevReg, WDRstBit, WDRstVal);
}

VOID WDTClearTimeoutStatus(){
    WDTSetBit(TimerReg, StatusBit, 1);
}

*****

*****

VOID WDTWriteByte(byte Register, byte Value){
    IOWriteByte(WDTAddr+Register, Value);
}

byte WDTReadByte(byte Register){
    return IOReadByte(WDTAddr+Register);
}

VOID WDTSetBit(byte Register, byte Bit, byte Val){
    byte TmpValue;

    TmpValue = WDTReadByte(Register);
    TmpValue &= ~(1 << Bit);
    TmpValue |= Val << Bit;
    WDTWriteByte(Register, TmpValue);
}

*****

```


Appendix B

I/O Information

B.1 I/O Address Map





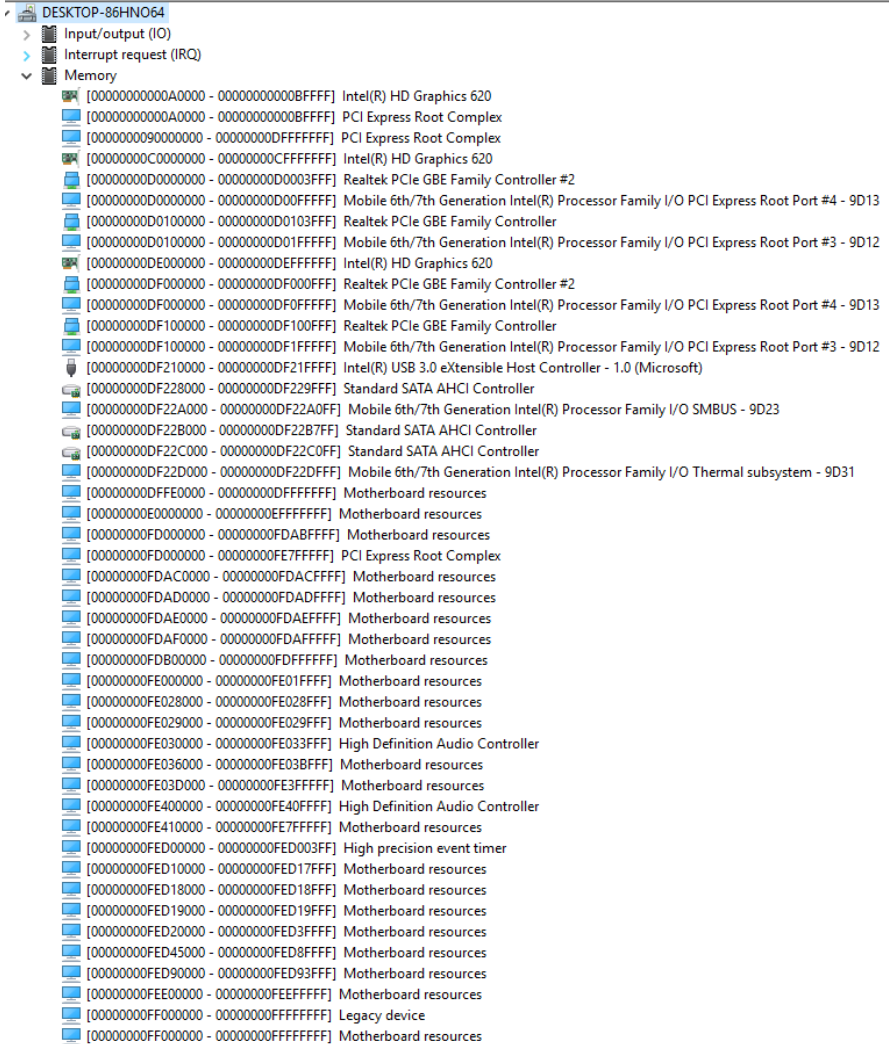


































Input/output (I/O)	
▼	[0000000000000000 - 000000000000CF7] PCI Express Root Complex
▶	[0000000000000020 - 0000000000000021] Programmable interrupt controller
▶	[0000000000000024 - 0000000000000025] Programmable interrupt controller
▶	[0000000000000028 - 0000000000000029] Programmable interrupt controller
▶	[000000000000002C - 000000000000002D] Programmable interrupt controller
▶	[000000000000002E - 000000000000002F] Motherboard resources
▶	[0000000000000030 - 0000000000000031] Programmable interrupt controller
▶	[0000000000000034 - 0000000000000035] Programmable interrupt controller
▶	[0000000000000038 - 0000000000000039] Programmable interrupt controller
▶	[000000000000003C - 000000000000003D] Programmable interrupt controller
▶	[0000000000000040 - 0000000000000043] System timer
▶	[000000000000004E - 000000000000004F] Motherboard resources
▶	[0000000000000050 - 0000000000000053] System timer
▶	[0000000000000060 - 0000000000000060] Standard PS/2 Keyboard
▶	[0000000000000061 - 0000000000000061] Motherboard resources
▶	[0000000000000063 - 0000000000000063] Motherboard resources
▶	[0000000000000064 - 0000000000000064] Standard PS/2 Keyboard
▶	[0000000000000065 - 0000000000000065] Motherboard resources
▶	[0000000000000067 - 0000000000000067] Motherboard resources
>	[0000000000000070 - 0000000000000077] System CMOS/real time clock
▶	[0000000000000080 - 0000000000000080] Motherboard resources
▶	[0000000000000092 - 0000000000000092] Motherboard resources
▶	[00000000000000A0 - 00000000000000A1] Programmable interrupt controller
▶	[00000000000000A4 - 00000000000000A5] Programmable interrupt controller
▶	[00000000000000A8 - 00000000000000A9] Programmable interrupt controller
▶	[00000000000000AC - 00000000000000AD] Programmable interrupt controller
▶	[00000000000000B0 - 00000000000000B1] Programmable interrupt controller
▶	[00000000000000B2 - 00000000000000B3] Motherboard resources
▶	[00000000000000B4 - 00000000000000B5] Programmable interrupt controller
▶	[00000000000000B8 - 00000000000000B9] Programmable interrupt controller
▶	[00000000000000BC - 00000000000000BD] Programmable interrupt controller
▶	[00000000000002F8 - 00000000000002FF] Communications Port (COM2)
▶	[00000000000003B0 - 00000000000003BB] Intel(R) HD Graphics 620
▶	[00000000000003C0 - 00000000000003DF] Intel(R) HD Graphics 620
▶	[00000000000003F8 - 00000000000003FF] Communications Port (COM1)
▶	[00000000000004D0 - 00000000000004D1] Programmable interrupt controller
▶	[0000000000000680 - 000000000000069F] Motherboard resources
▶	[0000000000000A00 - 0000000000000A0F] Motherboard resources
▶	[0000000000000A10 - 0000000000000A1F] Motherboard resources
▼	[000000000000D00 - 000000000000FFFF] PCI Express Root Complex
▶	[000000000000164E - 000000000000164F] Motherboard resources
>	[0000000000001800 - 00000000000018FE] Motherboard resources
>	[000000000000D000 - 000000000000DFFF] Mobile 6th/7th Generation Intel(R) Processor Family I/O PCI Express Root Port #4 - 9D13
>	[000000000000E000 - 000000000000EFFF] Mobile 6th/7th Generation Intel(R) Processor Family I/O PCI Express Root Port #3 - 9D12
▶	[000000000000F000 - 000000000000F03F] Intel(R) HD Graphics 620
▶	[000000000000F040 - 000000000000F05F] Mobile 6th/7th Generation Intel(R) Processor Family I/O SMBUS - 9D23
▶	[000000000000F060 - 000000000000F07F] Standard SATA AHCI Controller
▶	[000000000000F080 - 000000000000F083] Standard SATA AHCI Controller
▶	[000000000000F090 - 000000000000F097] Standard SATA AHCI Controller
▶	[000000000000FF00 - 000000000000FFFE] Motherboard resources
>	[000000000000FFFF - 000000000000FFFF] Motherboard resources

B.2 Memory Address Map



Address Range	Device Name
[0000000000A0000 - 0000000000BFFFFF]	Intel(R) HD Graphics 620
[0000000000A0000 - 0000000000BFFFFF]	PCI Express Root Complex
[0000000090000000 - 00000000DFFFFFFF]	PCI Express Root Complex
[00000000C0000000 - 00000000CFFFFFFF]	Intel(R) HD Graphics 620
[00000000D0000000 - 00000000D0003FFF]	Realtek PCIe GBE Family Controller #2
[00000000D0000000 - 00000000D00FFFFF]	Mobile 6th/7th Generation Intel(R) Processor Family I/O PCI Express Root Port #4 - 9D13
[00000000D0100000 - 00000000D0103FFF]	Realtek PCIe GBE Family Controller
[00000000D0100000 - 00000000D01FFF7FFF]	Mobile 6th/7th Generation Intel(R) Processor Family I/O PCI Express Root Port #3 - 9D12
[00000000DE000000 - 00000000DEFFFFFF]	Intel(R) HD Graphics 620
[00000000DF000000 - 00000000DF00FFFF]	Realtek PCIe GBE Family Controller #2
[00000000DF000000 - 00000000DF0FFFFF]	Mobile 6th/7th Generation Intel(R) Processor Family I/O PCI Express Root Port #4 - 9D13
[00000000DF100000 - 00000000DF100FFFF]	Realtek PCIe GBE Family Controller
[00000000DF100000 - 00000000DF1FFF7FFF]	Mobile 6th/7th Generation Intel(R) Processor Family I/O PCI Express Root Port #3 - 9D12
[00000000DF210000 - 00000000DF21FFF7FFF]	Intel(R) USB 3.0 eXtensible Host Controller - 1.0 (Microsoft)
[00000000DF228000 - 00000000DF229FFF]	Standard SATA AHCI Controller
[00000000DF22A000 - 00000000DF22A0FF]	Mobile 6th/7th Generation Intel(R) Processor Family I/O SMBUS - 9D23
[00000000DF22B000 - 00000000DF22B7FFF]	Standard SATA AHCI Controller
[00000000DF22C000 - 00000000DF22C0FF]	Standard SATA AHCI Controller
[00000000DF22D000 - 00000000DF22DFFF]	Mobile 6th/7th Generation Intel(R) Processor Family I/O Thermal subsystem - 9D31
[00000000DFFE0000 - 00000000DFFFFFFF]	Motherboard resources
[00000000E0000000 - 00000000EFFFFFFF]	Motherboard resources
[00000000FD000000 - 00000000FDABFFFF]	Motherboard resources
[00000000FD000000 - 00000000FE7FFFFF]	PCI Express Root Complex
[00000000FDAC0000 - 00000000FDACFFFF]	Motherboard resources
[00000000FDAD0000 - 00000000FDADFFFF]	Motherboard resources
[00000000FDAE0000 - 00000000FDAEFFFF]	Motherboard resources
[00000000FDAF0000 - 00000000FDAFFFFF]	Motherboard resources
[00000000FDB00000 - 00000000FDFFFFFF]	Motherboard resources
[00000000FE000000 - 00000000FE01FFFF]	Motherboard resources
[00000000FE028000 - 00000000FE028FFF]	Motherboard resources
[00000000FE029000 - 00000000FE029FFF]	Motherboard resources
[00000000FE030000 - 00000000FE033FFF]	High Definition Audio Controller
[00000000FE036000 - 00000000FE03BFFF]	Motherboard resources
[00000000FE03D000 - 00000000FE3FFFFF]	Motherboard resources
[00000000FE400000 - 00000000FE40FFFF]	High Definition Audio Controller
[00000000FE410000 - 00000000FE7FFFFF]	Motherboard resources
[00000000FED00000 - 00000000FED003FF]	High precision event timer
[00000000FED10000 - 00000000FED17FFF]	Motherboard resources
[00000000FED18000 - 00000000FED18FFF]	Motherboard resources
[00000000FED19000 - 00000000FED19FFF]	Motherboard resources
[00000000FED20000 - 00000000FED3FFFF]	Motherboard resources
[00000000FED45000 - 00000000FED8FFFF]	Motherboard resources
[00000000FED90000 - 00000000FED93FFF]	Motherboard resources
[00000000FEE00000 - 00000000FEEFFFFF]	Motherboard resources
[00000000FF000000 - 00000000FFFFFFF]	Legacy device
[00000000FF000000 - 00000000FFFFFFF]	Motherboard resources

B.3 IRQ Mapping Chart

Interrupt request (IRQ)		
	(ISA) 0x00000000 (00)	System timer
	(ISA) 0x00000001 (01)	Standard PS/2 Keyboard
	(ISA) 0x00000003 (03)	Communications Port (COM2)
	(ISA) 0x00000004 (04)	Communications Port (COM1)
	(ISA) 0x00000008 (08)	System CMOS/real time clock
	(ISA) 0x0000000C (12)	PS/2 Compatible Mouse
	(ISA) 0x0000000E (14)	Motherboard resources
<hr/>		
	(ISA) 0x000001E8 (488)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E9 (489)	Microsoft ACPI-Compliant System
	(ISA) 0x000001EA (490)	Microsoft ACPI-Compliant System
	(ISA) 0x000001EB (491)	Microsoft ACPI-Compliant System
	(ISA) 0x000001EC (492)	Microsoft ACPI-Compliant System
	(ISA) 0x000001ED (493)	Microsoft ACPI-Compliant System
	(ISA) 0x000001EE (494)	Microsoft ACPI-Compliant System
	(ISA) 0x000001EF (495)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F0 (496)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F1 (497)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F2 (498)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F3 (499)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F4 (500)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F5 (501)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F6 (502)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F7 (503)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F8 (504)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F9 (505)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FA (506)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FB (507)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FC (508)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FD (509)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FE (510)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FF (511)	Microsoft ACPI-Compliant System
	(PCI) 0x0000000B (11)	Mobile 6th/7th Generation Intel(R) Processor Family I/O Thermal subsystem - 9D31
	(PCI) 0x0000000B (11)	Mobile 6th/7th Generation Intel(R) Processor Family I/O SMBUS - 9D23
	(PCI) 0x00000010 (16)	High Definition Audio Controller
	(PCI) 0x00000012 (18)	Realtek PCIe GBE Family Controller
	(PCI) 0x00000013 (19)	Realtek PCIe GBE Family Controller #2
	(PCI) 0xFFFFFFF0 (-4)	Intel(R) USB 3.0 eXtensible Host Controller - 1.0 (Microsoft)
	(PCI) 0xFFFFFFF0 (-3)	Intel(R) HD Graphics 620
	(PCI) 0xFFFFFFF0 (-2)	Standard SATA AHCI Controller

Appendix C

Mating Connectors

C.1 List of Mating Connectors and Cables

The table notes mating connectors and available cables.

Connector Label	Function	Mating Connector		Available Cable	Cable P/N
		Vendor	Model no		
CN1	Battery	Molex	51021-0200	Battery Cable	175011301C
CN2	HDMI	Molex	88768-9900	NA	NA
CN6	LAN Connector	Molex	44915-0001	NA	NA
CN7	LAN Connector	Molex	44915-0001	NA	NA
CN10	USB 2.0 Connector	JCTC	11002H00-2x5P	USB Cable	170010010D
CN11	USB 3.0 Connector	Wurth Electronics	710-692112030100	NA	NA
CN15	Front Panel Connector	JCTC	11002H00-2x5P	Front Panel Cable	1709100108
CN16	COM Port 1/2 & line out Connector	JCTC	11002H00-2x10P	COM Port Cable	1701200101
CN19	LPC Port	JST	SHR-12V-S-B	AAEON LPC Cable	1703120130
CN23	DC Jack	HUANG JI	5525C257-3T00-R1-7.5	Power Cable	1702041004
CN27	FAN Connector	Molex	51021-0400	NA	NA

Appendix D

DIO

D.1 DIO

The F75111 provides one serial access interface, I2C Bus, to read/write internal registers.

The address of Serial Bus is 0x6E (0110_1110)

The related register for configuring DIO is list as follows:

Configuration and Control Register – Index 01h

Power-on default [7:0] =0000_1000b

Bit	Name	R/W	PWR	Description
7	INIT	R/W	VSB3V	Software reset for all registers including Test Mode registers. Users use only.
6	Reserved	R/W	VSB3V	
5	EN_WDT10	R/W	VSB3V	Enable Reset Out. If set to 1, enable WDTOUT10# output. Default is disable.
4	Reserved	R/W	VSB3V	
3	Reserved	R/W	VSB3V	
2	Reserved	R/W	VSB3V	
1	SMART_POW R_MANAGEM ENT	R/W	VSB3V	Set this bit to 1 will enable auto power down mode, when all function are idle then 20ms the chip will auto power down, it will wakeup when GPIO state change or read write register
0	SOFT_POWR_ DOWN	R/W	VSB3V	Set this bit to 1 will power down all of the analog block and stop internal clock, write 0 to clear this bit or when GPIO state change will auto clear this bit to 0.

GPIO2x Output Control Register – Index 20h

Power-on default [7:0] =0000_0000b

Bit	Name	R/W	PWR	Description
7	GP27_OCTRL	R/W	VSB3V	GPIO 27 output control. Set to 1 for output function. Set to 0 for input function(default).
6	GP26_OCTRL	R/W	VSB3V	GPIO 26 output control. Set to 1 for output function. Set to 0 for input function(default).
5	GP25_OCTRL	R/W	VSB3V	GPIO 25 output control. Set to 1 for output function. Set to 0 for input function(default).
4	GP24_OCTRL	R/W	VSB3V	GPIO 24 output control. Set to 1 for output function. Set to 0 for input function(default).

GPIOx Output Data Register – Index 21h

Power-on default [7:0] =0000_0000b

Bit	Name	R/W	PWR	Description
7	GP27_ODATA	R/W	VSB3V	GPIO 27 output data.
6	GP26_ODATA	R/W	VSB3V	GPIO 26 output data.
5	GP25_ODATA	R/W	VSB3V	GPIO 25 output data.
4	GP24_ODATA	R/W	VSB3V	GPIO 24 output data.

GPIOx Input Status Register – Index 22h

Power-on default [7:0] =xxxx_xxxx

Bit	Name	R/W	PWR	Description
7	GP27_PSTS	RO	VSB3V	Read the GPIO27 data on the pin.
6	GP26_PSTS	RO	VSB3V	Read the GPIO26 data on the pin.
5	GP25_PSTS	RO	VSB3V	Read the GPIO25 data on the pin.
4	GP24_PSTS	RO	VSB3V	Read the GPIO24 data on the pin.

The following is a sample code for 8 input

```
.MODEL SMALL
```

```
.CODE
```

```
begin:
```

```
mov cl,01h
```

```
mov al,80h
```

```
call CT_I2CWriteByte
```

```
call Delay5ms
```

```
mov al,00h
```

```
mov cl,20h
```

```
call CT_I2CWriteByte
```

```
mov cl,22h
```

```
call CT_I2CReadByte
```

```
;Input : CL - register index
```

```
; CH - device ID
;Output : AL - Value read
Ct_I2CReadByte Proc Near
mov ch,06eh
mov dx, F040h + 00h ; Host Control Register
xor al, al ; Clear previous commands
out dx, al
call Delay5ms
mov dx, F040h + 04h ; Transmit Slave Address Register
inc ch ; Set the slave address and
mov al, ch ; prepare for a READ command
out dx, al
mov dx, F040h + 05h ; Host Command Register
mov al, cl ; offset to read
out dx, al
mov dx, F040h + 06h

xor al, al ; Clear old data
out dx, al
mov dx, F040h + 01h ; Host Status Register
mov al, 07h ; Clear all status bits
out dx, al

mov dx, F040h + 00h ; Host Control Reegister
mov al, 12h ; Start a byte access
out dx, al
call CT_Chk_SMBus_Ready
mov dx, F040h + 06h
```

```
in al, dx
```

```
ret
```

```
Ct_I2CReadByte Endp
```

```
;Input : CL - register index
```

```
; CH - device ID
```

```
; AL - Value to write
```

```
;Output: none
```

```
Ct_I2CWriteByte Proc Near
```

```
mov ch,06eh
```

```
xchg ah, al
```

```
mov dx, F040h + 00h ; Host Control Register
```

```
xor al, al ; Clear previous commands
```

```
out dx, al
```

```
call Delay5ms
```

```
mov dx, F040h + 04h ; Transmit Slave Address Register
```

```
mov al, ch ; Set the slave address and
```

```
out dx, al ; prepare for a WRITE command
```

```
mov dx, F040h + 05h ; Host Command Register
```

```
mov al, cl ; offset to write
```

```
out dx, al
```

```
mov dx, F040h + 06h
```

```
mov al, ah
```

```
out dx, al
```

```
mov dx, F040h + 01h ; Host Status Register
```

```
mov al, 07h ; Clear all status bits
```

```
out dx, al
mov dx, F040h + 00h ; Host Control Register
mov al, 12h ; Start a byte access
out dx, al
call CT_Chk_SMBus_Ready ;R14
ret
Ct_I2CWriteByte Endp
; Wait until the busy bit clears, indicating that the SMBUS
; activity has concluded.
CT_Chk_SMBus_Ready Proc Near
mov dx, F040h + 01h ; Host Status Register
Check_I2C_ByteRead_ForBusy:
in al, dx
test al, 08h
jnz Check_I2C_ByteRead_ForBusy
Check_I2C_ByteRead_ForStatus:
in al, dx
test al, 07h ; HSTS[2:0]=All clearable status bits
jz Check_I2C_ByteRead_ForStatus
ret
CT_Chk_SMBus_Ready Endp
END begin
```