

GES-2200F

P5 Test Report

Summary	<input checked="" type="checkbox"/> Pass			
	<input type="checkbox"/> Fail			
	<input type="checkbox"/> Pass with Deviation			
	Comment: _____			
Test Result Summary				
	Critical	Major	Minor	Enhancement
Defect Found	0	0	0	0
Defect Unsolved	0	0	0	0

Issue date	Approval	Test Engineer
_____	_____	_____
2011/03/08	Jansin Lee	AndersonLin

Test Suites Overall Results Summary

No.	Test Category	Test Results
1	Hardware Compatibility Test	PASS
2	Basic Function Test	PASS
3	Integration Test	PASS
4	Application Test	PASS
5	Power Consumption Test	PASS
6	Time Accuracy Test	PASS
7	O.S. Compatibility Test	PASS
8	BIOS Test	PASS
9	Performance Test	PASS

Platform Information

Item	Device Information	Test Item
PCB Model / Version	GES-2200F A 1.0	1,2,3,4,5,6,7,8,9
CPU Board	EMB-LN9T A1.0	1,2,3,4,5,6,7,8,9
Carrier Board	N/A	1,2,3,4,5,6,7,8,9
BIOS / Version	GES-2200F 1.1(02/23/2011)	1,2,3,4,5,6,7,8,9
CPU Type	Intel® Atom™ Processor D510 (1M Cache, 1.66 GHz)	1,2,3,4,5,6,7,8,9
Memory Type	Samsung DDR2-667 2GB	1,2,3,4,5,6,7,8,9
SATA HDD	Toshiba MK1665GSX 2.5" SATAII 160GB	1,2,3,4,5,6,7,8,9
SATA DVD-ROM	PIONEER DVR-215BK 20X DVD/CD Writer	1,2,3,4,5,6,7,8,9
USB DVD-ROM	LITE-ON USB2.0 DVD-R/W DX-20A4PU	1,2,3,4,5,6,7,8,9
LCD Monitor	Samsung SyncMaster 171S	1,2,3,4,5,6,7,8,9
Compact Flash	N/A	1,2,3,4,5,6,7,8,9
Daughter Board	N/A	1,2,3,4,5,6,7,8,9
Expansion Board	PER-T204	1,2,3,4,5,6,7,8,9
Operating System	Windows XP Professional English SP3 32 Bit	7-3
	Windows 7 English Ultimate 32 Bit	7-2
	Linux Fedora 14 English	7-1
Power Supply	DC Adapter : FSP Model:FSP060-DBAB1 Input:100-240V / Output:12V	1,2,3,4,5,6,7,8,9
Chipset Information with XP Professional English SP3 32 Bit Driver Version		
Chipset Software	Intel 5 Series/3400 Series chipset 9.1.1.1025 (12/14/2009)	
North Bridge	Intel PineView	
South Bridge	ICH8-M	
Super IO Chipset	Windbond W83627UHG	
VGA Chipset	Intel PineView	
Audio Chipset	VIA VT1708B	
Ethernet Chipset	Realtek RTL8111C	

Summary Table of contents:

GES-2200F.....	1
Test Suites Overall Results Summary	2
Platform Information.....	2
1. Hardware Test	5
2. Basic Function Test.....	7
3. Integration Test	11
4. Application Test	12
5. Power Consumption Test	14
5-1 PC Health Status.....	14
6. Timer Accuracy Test	14
6-1. System Clock & RTC Clock Test	14
6-2. Booting Timer Test	14
6-3. Watchdog Timer Test	14
7. O.S. Compatibility Test	15
7-1. English Fedora 14 – Kernel 2.6.35.6- 45.fc14	15
7-2. Windows 7 Ultimate English Version 32/64Bit.....	16
7-3 Windows XP Professional English Version 32/64 Bit	17
8. BIOS Function Test.....	18
8-1. Boot Sequence Test	18
8-2. Power Management Test	18
8-2.1. APM Power Management Test.....	18
8-2.2. ACPI Power Management Test	18
8-3. Power On Function Test.....	18
8-4. Power On after Power Failure Test	19
8-5. AAEON Tag Check Utility	19
8-6. TPM Function Test	19
8-7. IAMT Function Test.....	19
8-8. CAN port Function Test.....	19
8-9. Administrator / User Password Test	19
9. Performance Test.....	20
9-2. Memory Test	21

There are 3 test results in this document; they are described as follows:

Pass: Function worked perfectly

Fail: Function failed and must be modified in the next version

N/A: Outside of specifications or no test equipment

The test report would be tested and updated after version changed.

●Version Released Records

Date	Version	Item	Note
2010/04/21	P3-1001	1. 調整文字表格前後對齊 2. Modify 新版首頁	
2010/06/01	P2P3-1001	1. New Test Report	
2010/06/21	P2P3-1002	1. Add BIOS -> SPI ROM Setting (South Bridge – GPIO)	
2010/09/02	P2P2-1003	1. Modify All Test Items	

1. Hardware Test

1-1. CPU Compatibility Test

CPU Information	Result			Note
	Pass	Fail	N/A	
Intel® Atom™ Processor D510 (1M Cache, 1.66 GHz)	X			

1-2. Memory Compatibility Test

Memory Information	MEM V4.0			Note
	Pass	Fail	N/A	
Samsung DDR2-667 1GB	X			
Transcend DDR2-667 1GB	X			

1-3. SATA Compatibility Test

SATA Device Information	Result			Note
	Pass	Fail	N/A	
WD 2.5H.D / WD800BEVS-22RST0 80GB	X			
Toshiba 2.5 H.D /MK1665GSX 160GB	X			

1-4. IDE Compatibility Test

IDE Device Information	Result			Note
	Pass	Fail	N/A	
			X	

1-5. Compact Flash Compatibility Test

Compact Flash Information	Result			Note
	Pass	Fail	N/A	
Transcend UDMA 4GB CF			X	

1-6. LVDS Compatibility Test

LVDS Model		Result			Note
		Pass	Fail	N/A	
LVDS	1_AUO G065VN01 V.0 / 6.5" / 640x480 / 18bit (4:3)			X	
	2_AUO G065VN01 V.0 / 6.5" / 640x480 / 24bit (4:3)			X	
	3_Data Image 7" / 800*480 / 18bit (16:9)			X	
	4_AU G084SN05 V.3 / 8.4" / 800*600 / 18bit (4:3)			X	
	5_AU B104SN02 V.0 / 10.4" / 800*600 / 18bit (4:3)			X	
	6_AUO G084SN05 v7 / 8.4" / 800*600 / 24bit (4:3)			X	
	7_AU G150XG01 V.0 / 15" / 1024*768 / 18bit (4:3)			X	
	8_AU M150XN07 V.2 / 15" / 1024x768 / 24bit (4:3)			X	
	9_Toshiba /12.1"/1280 x 768 x 18bit (16:9)			X	
	10_AU M170EG01 V.D/ 17" / 1280*1024 / 48bit (4:3)			X	

11_AU M170XW01 V.1 / 17" / 1280x768 / 24bit (16:9)			X	
12_AUO T260XW02 / 26" / 1366x768 / 24bit			X	
13_AU M201UN02 V.5 / 20.1" / 1600x1200x48bit			X	
14_AUO T370HW01 / 37" / 1920x1080 / 48bit			X	
15_AUO M190PW01 V0 / 19"/1440X900/48 bit			X	

2. Basic Function Test

2-1. Video Function Test

2-1.1. Single Output Function Test

Note: Pay attention with Full Screen under POST screen and Text Mode.											
Interface											
VGA	CHIMEI 22SH-L										
DVI	N/A										
TV	N/A										
LVDS	N/A										
Color Quality	[X] 16bit [] 24bit [X] 32bit										
Resolution	VGA			DVI			LVDS			Note	
	Pass	Fail	N/A	Pass	Fail	N/A	Pass	Fail	N/A		
640X480			X			X			X		
800X600	X					X			X		
1024X768	X					X			X		
1152X864			X			X			X		
1280X600			X			X			X		
1280X720			X			X			X		
1280X768			X			X			X		
1280X960			X			X			X		
1280X1024			X			X			X		
1366X768			X			X			X		
1600X900			X			X			X		
1600X1200			X			X			X		
1600X1050			X			X			X		
1792X1344			X			X			X		
1856X1392			X			X			X		
1920X1080			X			X			X		
1920X1200			X			X			X		
1920X1440			X			X			X		
2048X1536			X			X			X		
Rotation	X					X			X	Rotation (0 / 90 /180 /270)	

2-1.2. Dual Output Function Test

Selection	Output	Result			Note
		Pass	Fail	N/A	
Dual Display Clone	VGA + DVI			X	
Dual Display Twin				X	
Extended Desktop				X	
Dual Display Clone	VGA + LVDS			X	
Dual Display Twin				X	
Extended Desktop				X	

2-1.3. Video Resolution Test

Test points:

1. Power on without inserting any VGA connector until system reaches Windows desktop
2. Plug VGA connector into test machine while system reaches Windows then check VGA driver and display
3. Check VGA output Brightness is normal and it shows "Ghost Image" / "Flicker" or not

	Result			Note
	Pass	Fail	N/A	
In Windows Desktop	X			







2-2. Audio Function Test

[] No Support

Function Test	Result			Note
	Pass	Fail	N/A	
L (Left) Channel	X			
R (Right) Channel	X			
Line In			X	
MICROPHONE			X	
S/P DIF function Test	Input		X	
	Output		X	

2-3. LAN Function Test

[] No Support

1000Mbps LAN HUB		D-Link DGS-1008D								
100Mbps LAN HUB		HP J4095A 24 Ports								
10Mbps LAN HUB		SVEC FD916H								
OnBoard LAN1		Intel® Gigabit CT Desktop Adapter					MAC Address		00-07-32-16-19-F9	
OnBoard LAN2		Intel® 82577LM Gigabit Network Connection					MAC Address		00-07-32-16-19-F8	
LAN Speed	Link / Active LED	Speed LED	LAN 1			LAN 2			Note	
			Pass	Fail	N/A	Pass	Fail	N/A		
1000Mbps			X			X				
100Mbps			X			X				
10Mbps			X			X				
Wake On LAN			X			X				
Boot ROM to Novell 4.11 [RPL]					X			X		
LAN Boot (PXE)			X			X				
Internet Browser (DHCP Server)			X			X				
Ping 1000 times (Allow failure rate under 1/1000)			X			X				

2-3.2. SmartBits Test

DUT Platform Information:


Graphics Media	Fedora 13 Default setting
LAN	LAN1→ Realtek RTL8111C 10/100/1G Ethernet LAN2→ Realtek RTL8111C 10/100/1G Ethernet
Audio Driver	Fedora Default setting.

SMB Platform Information:

Chassis	SPIRENT Smartbits 600B
Chassis Version	2.80.003 (Cur) 2.50.000
Chassis Serial #	06014047
Library	6.00-29
API	5.50.42.01
File	0550042
Module	2 * LAN-3324A SmartMetrics XD 4-Port 10/100/1000Base-T Gigabit Ethernet
Test Software	SmartFlow5.50.42.1

Test Result:


1. Half Direction (LAN1: Realtek RTL8111C 10/100/1G Ethernet → LAN2: Realtek RTL8111C 10/100/1G Ethernet)

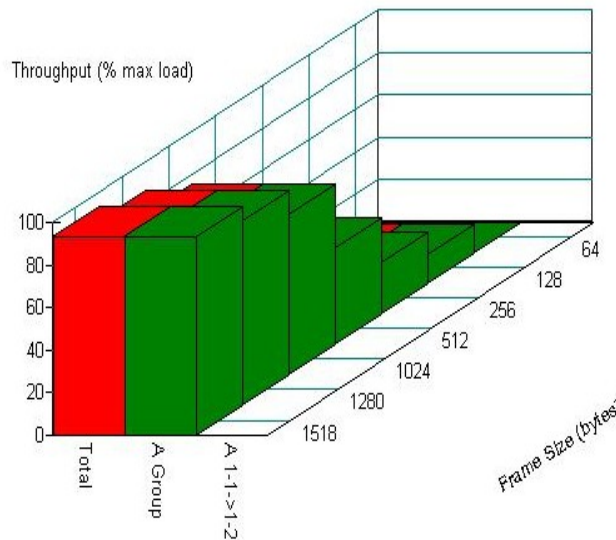

Throughput vs Frame Size

<u>Name/Framesize</u>	<u>64</u>	<u>128</u>	<u>256</u>	<u>512</u>	<u>1024</u>	<u>1280</u>	<u>1518</u>
Total	0	13.375	23.4296875	45.0859375	74.4765625	86.078125	93.0390625
A Group	0	13.375	23.4296875	45.0859375	74.4765625	86.078125	93.0390625
A 1-1->1-2	N/A	N/A	N/A	N/A	N/A	N/A	N/A

2. Binary Direction(LAN1: Realtek RTL8111C 10/100/1G Ethernet → LAN2: Realtek RTL8111C 10/100/1G Ethernet)

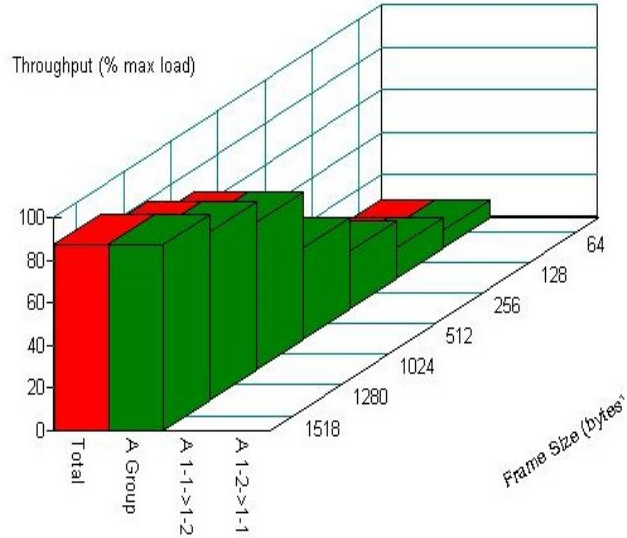

Throughput vs Frame Size

<u>Name/Frame size</u>	<u>64</u>	<u>128</u>	<u>256</u>	<u>512</u>	<u>1024</u>	<u>1280</u>	<u>1518</u>
Total	7.9609375	14.1484375	26.5234375	42.765625	69.0625	78.34375	86.8515625
A Group	7.9609375	14.1484375	26.5234375	42.765625	69.0625	78.34375	86.8515625
A 1-1->1-2	N/A	N/A	N/A	N/A	N/A	N/A	N/A
A 1-2->1-1	N/A	N/A	N/A	N/A	N/A	N/A	N/A

2-4. Others Function Test

[X] No Support

Function Test	Result			Note
	Pass	Fail	N/A	
3G Module (.....)				
GPRS (.....)				
Wireless LAN (.....)				
Bluetooth (.....)				

3. Integration Test

3-1. USB Port Integration Test

Item	USB Port	Boot			Function(XP)			Note
		Pass	Fail	N/A	Pass	Fail	N/A	
USB HDD		X			X			
USB FDD Mitsumi D353GUE		X			X			
SONY USB2.0 DVD-R/W DRX-830UL		X			X			
USB Hub Test (Connect USB Device) HUB Port1: USB Keyboard / HUB Port2: USB Mouse / HUB Port3: USB HDD								
USB 2.0 HUB PowerSync / USB 2.0 4 Port HU-155					X			

3-2. Digital I/O Port Test

DIO Address (____)	Result			Notes
	Pass	Fail	N/A	
DIO VCC +5V			X	

3-3. COM Port Integration Test

Test Item	Result			Notes
	Pass	Fail	N/A	
Serial Modem Dial Out	X			
Serial Modem	Ring In	X		Test by Modem
	+12V		X	Test by Multimeter
	+5V		X	Test by Multimeter
BurnIn Test V5.3 Pro	X			

3-4. RS-422 / RS-485 Test

Test Item	Result			Notes
	Pass	Fail	N/A	
RS-422 for COM2	X			Use loopback and WINSSD.exe to test RS-422 in Windows
RS-485 for COM2	X			Use ICP CON I-7044D D/IO Module in Windows(Support Auto flow control)
	X			The communication between the RS-485 pots of two boards is linked by one 100m cable on Windows Terminal

3-5. LPT Port Test

Test Item	Result			Notes
	Pass	Fail	N/A	
XEROX Phaser 3124 Laser Printer			X	

4. Application Test

4-1. PCI Slot Function (PCI Adapter Card) Test No Support

PCI Card	Function			Note
	Pass	Fail	N/A	

4-2. PCI-Express Function Test No Support

PCI-Express x1 (請自行修改 x1 x4 x16)	Function			Note
	Pass	Fail	N/A	

4-3. Mini PCI Card Compatibility Test No Support

Mini PCI Card	Function			Note
	Pass	Fail	N/A	

4-4. CardBus (PCMCIA) Compatibility Function Test No Support

CardBus (PCMCIA)	Function			Note
	Pass	Fail	N/A	

4-5. Adapter Compatibility- Industry Control Card PC/104, PC/104+, PCI-104 Modules

4-5.1. Device List: PC/104 Module No Support

Test Item	Result			Notes
	Pass	Fail	N/A	
AAEON PCM-3660				

4-5.2. Device List: PC/104+ Module No Support

Test Item	Result			Notes
	Pass	Fail	N/A	
AAEON PCM-3430				

4-5.3. Device List: PCI-104 Module No Support

Test Item	Result			Notes
	Pass	Fail	N/A	
AAEON PCM-3730				

4-5.4. Device List: PCI/104 Express Module No Support

Test Item	Result			Notes
	Pass	Fail	N/A	
AAEON PER-123				

4-6. SSD Modules Compatibility Test

SSD HDD Compatibility Test:

Cable Type: IDE SATA2 MLC SLC No Support

Test Item	Result			Notes
	Pass	Fail	N/A	
Transcend SSD 16G - TS16GSSD25S				

4-7. Peripheral Compatibility- Storage Device Test

4-7.1. Disk on Chip (DOC) Test No Support

Test Item	Result			Notes
	Pass	Fail	N/A	
DOC 2000 Model	16MB			M-System / MD2200-D16
DOC 2000 Onboard Address	CC00			
	D000			
	D400			
	D800			
	DC00			
	Disable			

4-7.2. Disk on module (DOM) Test No Support

Test Item	Result			Notes
	Pass	Fail	N/A	
Transcend / TS512MDOM40V / 512MB / IDE 40 Pin				
Transcend / TS512MDOM44V / 512MB / IDE 44 Pin				

5. Power Consumption Test

5-1 PC Health Status

Test Point: The value between Actual Voltage and Voltage Monitor must be +/- 5%

Voltage Monitoring Test	Result			In Bios(V)	Note
	Pass	Fail	N/A		
VIN0	X			13.536	
VIN1	X			4.864	
VIN2	X			3.316	
VCORE	X			1.136	
System Temperature 1	X			49 ° C	
System Temperature 2	X			52 ° C	

6. Timer Accuracy Test

6-1. System Clock & RTC Clock Test

Under Room Temperature: 26 °C

Item Function	Time Interval	Margin for error	Actual	Result			Note
				Pass	Fail	N/A	
RTC Clock in Power On Mode	24 hrs	+/-2 sec	-1 Sec	X			
RTC Clock in Power Off Mode	24 hrs	+/-2 sec	-1 Sec	X			

6-2. Booting Timer Test

Installation	Actual		Note
System Booting Time	7.98	Sec	Press the Power Button till "Beep" Sound appears

6-3. Watchdog Timer Test

Use Function as below: W83627

[] No Support.

Under Room Temperature: 26°C / DOS Mode

Time-out interval	Margin for error	Actual	Result			Note
			Pass	Fail	N/A	
10 sec	+/- 10%	10.8 Sec	X			Software provided by Aaeon S/W
60 sec	+/- 10%	59.3 Sec	X			

7. O.S. Compatibility Test

7-1. English Fedora 14 – Kernel 2.6.35.6- 45.fc14

[X] No Support

Driver Information:

Chipset Software	Fedora 14 default driver
Graphics Media	Fedora 14 default driver
LAN Driver	Fedora 14 default driver
Audio Driver	Fedora 14 default driver

Install OS to IDE HDD/SATA HDD/ CF Card:

Installation	Result			Note
	Pass	Fail	N/A	
Kernel 2.6.35.6- 45.fc14	X			

Test Result:

Test Item	Result			Note
	Pass	Fail	N/A	
Display Function Test				
VGA -- Full Screen	X			
Network Function Test				
Connect to Internet – LAN 1	X			
Connect to Internet – LAN 2	X			
Audio Function Test				
Play Audio Function Test	X			
Base Function Test				
Mouse Test	X			
Keyboard Test	X			
CD-ROM Test	X			
USB 2.0 Removable Devices	X			
X Windows Application				
Start Button Office	X			Office function
X-Window	X			Startx – Desktop in Linux
Command Test On Text Mode: Attention Delay Phenomenon.				
uname -a	X			Show information
Shutdown	X			Init 0 or shutdown -h now
Restart the Computer	X			Init 6 or shutdown -r now
Halt	X			Power Off Mode
ls / clear; cd /dev /ls -l	X			Command instruction

7-2. Windows 7 Ultimate English Version 32/64Bit

[X] x32 Driver Information:

Chipset Software	Intel Chipset Ver. 6.1.7600.16385 (Date : 6/21/2006)
Graphics Media	Intel Graphics Chipset 3150 Ver. 8.14.10.1929 (Date: 9/23/2009)
LAN Driver	Realtek PCIe GBE Ver. 7.18.322.2010 (Date : 3/22/2010)
	Realtek PCIe GBE Ver. 7.18.322.2010 (Date : 3/22/2010)
Audio Driver	VIA Chipset Ver. 6.0.1.7300 (Date: 7/10/2009)

[X] No Support

[] x64 Driver Information:

Chipset Software	
Graphics Media	
LAN Driver	
Audio Driver	

Install OS to SATA HDD:

Installation	Result			Note
	Pass	Fail	N/A	
English Windows 7 Ultimate ACPI Mode	X			

Test Results:

Test Item	Result			Note
	Pass	Fail	N/A	
Single Display				
VGA -- Full Screen	X			
Boot - Windows 7 Ultimate Advanced Options Menu				
Safe Mode	X			
Basic Function Test				
PS/2 Mouse and Keyboard	X			
USB Mouse and Keyboard	X			
COM Port Mouse detect	X			
LPT1			X	
USB 2.0 Removable Devices	X			
LAN Function Test				
LAN1 --- Auto	X			
LAN2 --- Auto	X			
Audio Function Test				
Line Out Test	X			
Line In Test	X			
Microphone Test	X			
S/P DIF Test			X	
Start Menu				
Log off User	X			
Shut down	X			
Standby	X			
Restart	X			
Hibernate	X			

7-3 Windows XP Professional English Version 32/64 Bit

[] No Support

[X] x32 Driver Information:

Chipset Software	Intel 5 Series/3400 Series chipset 9.1.1.1025 (12/14/2009)
Graphics Media	Intel Graphics Media Accelerator 3150 6.14.10.5244 (3/17/2010)
LAN Driver	Realtek RTL8168C(P)/8111C(P) PCI-E Gigabit 5.698.701.2008 (7/1/2008)
	Realtek RTL8168C(P)/8111C(P) PCI-E Gigabit 5.698.701.2008 (7/1/2008)
Audio Driver	Realtek ALC 888 High Definition Audio (7/24/2008) 5.10.0.5672

[X] No Support

[] x64 Driver Information:

Chipset Software	
Graphics Media	
LAN Driver	
Audio Driver	

Install OS to SATA HDD/ CF Card:

Installation	Result			Note
	Pass	Fail	N/A	
English Windows XP ACPI Mode	X			

Test Results:

Test Item	Result			Note
	Pass	Fail	N/A	
Single Display				
VGA -- Full Screen	X			
Boot - Windows 7 Ultimate Advanced Options Menu				
Safe Mode	X			
Basic Function Test				
PS/2 Mouse and Keyboard	X			
USB Mouse and Keyboard	X			
COM Port Mouse detect	X			
LPT1			X	
USB 2.0 Removable Devices	X			
LAN Function Test				
LAN1 --- Auto	X			
LAN2 --- Auto	X			
Audio Function Test				
Line Out Test	X			
Line In Test	X			
Microphone Test	X			
S/P DIF Test			X	
Start Menu				
Log off User	X			
Shut down	X			
Standby	X			
Restart	X			
Hibernate	X			

8. BIOS Function Test

8-1. Boot Sequence Test

Test Item	Result			Note
	Pass	Fail	N/A	
Floppy			X	
Hard Disk	X			
Removable (All Device Priority)			X	
CDROM			X	
USB HDD	X			
USB Floppy	X			
USB CD-ROM	X			
LAN [Boot From LAN First]	X			
Disable	X			
Check "Halt on" item – All error but K/B			X	

8-2. Power Management Test

8-2.1. APM Power Management Test

Test Item	Setting Test	Result			Note
		Pass	Fail	N/A	
Suspend Mode	Function Test			X	
Power Button	Delay 4 Sec			X	Soft-Off By PWRBTN
Power Button	Instant-Off			X	Soft-Off By PWRBTN

8-2.2. ACPI Power Management Test

Test Item	Result			Note
	Pass	Fail	N/A	
Enable ACPI Auto Configuration	X			
Enable Hibernation	X			
ACPI - S1 (POS)	X			Resume from PS/2 keyboard or mouse.
	X			Resume from USB keyboard or mouse.
ACPI - S3 (STR)	X			
Suspend Disable	X			

8-3. Power On Function Test

Test Item	Result			Note
	Pass	Fail	N/A	
Password	X			
Hot KEY			X	
MOUSE Move & Click			X	
MOUSE Click			X	
Any KEY			X	
BUTTON ONLY	X			

8-4. Power On after Power Failure Test

Test Item	Result			Note
	Pass	Fail	N/A	
Off	X			
On	X			
Former-Sts (Auto)	X			

8-5. AAEON Tag Check Utility

Test Item	Result			Note
	Pass	Fail	N/A	
Check AAEON BIOS OK	X			AONCHECK.EXE

8-6. TPM Function Test

Test Item	Result			Note
	Pass	Fail	N/A	
No Change	X			
Clear	X			
Enable & Active	X			
Disable & Disactive	X			Detect TPM device under Windows.

8-7. IAMT Function Test

Test Item	Result			Note
	Pass	Fail	N/A	
IAMT Function			X	

8-8. CAN port Function Test

Note: Sets the interrupt for each port. Be sure that this setting matches the IRQ

Basic Function Test					
Test Item	Interrupt: Polling or IRQ	Result			Note
		Pass	Fail	NA	
CAN1 transmits CAN2	CAN1:			X	
	CAN2			X	
CAN2 transmits CAN1	CAN2:			X	
	CAN1:			X	

8-9. Administrator / User Password Test

Test Item	Result			Note
	Pass	Fail	N/A	
Administrator Password	X			
User Password	X			

9. Performance Test

Test Result: (Display set 1024*768 test)

Testing Software	Scope		Note
	AAEON	Ref.	
PCMark2002			Only for XP
CPU	2789	-	
Memory	7321	-	
HDD	962	-	
Benchmark (A)	-		
PCMark2005			XP and Windows 7
PCMark	2106	-	PCMarks
CPU	2034	-	
Memory	2558	-	
Graphics	850	-	
HDD	3872	-	
Benchmark (B)	-		
Average Efficiency	-		

Testing Software	Scope		Note
	AAEON	Ref.	
3Dmark2003 v360			Only for XP
3Dmark Score	964	-	
CPU Score	297	-	
Benchmark (A)	-		
3Dmark2005 v130			XP and Windows 7
3Dmark Score	350	-	
CPU Score	2246	-	
Benchmark (B)	-		
Average Efficiency	-		

Testing Software	Scope		Note
	AAEON	Ref.	
Final Reality V1.01—BenchMark Test			XP and Windows 7
2D image	20.27	-	
3D	3.93	-	
Bus transfer	37.58	-	
Overall	13.88	-	Reality marks
Benchmark (A)	-		

9-2. Memory Test

Test Item	Result			Note
	Pass	Fail	N/A	
MEM v4.10 Overnight Test	X			