


EPIC-9457 Rev. A

EPIC Board with Onboard Intel® Atom™ N270 Processor

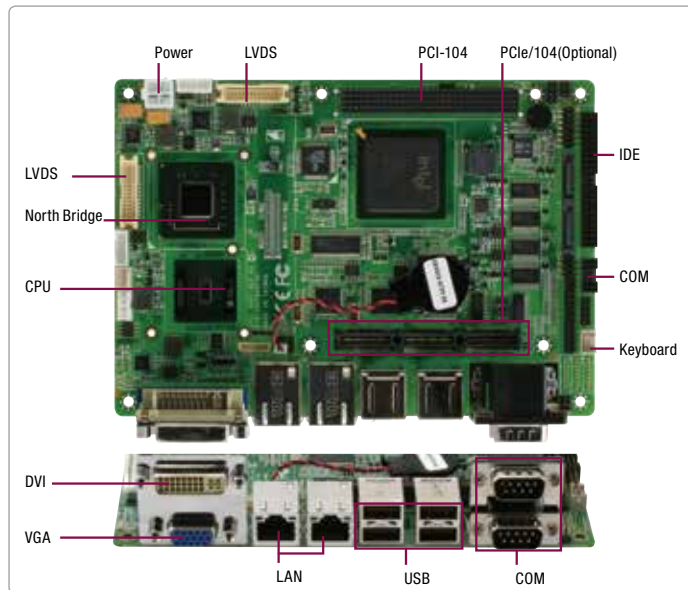

Features

- Onboard Intel® Atom™ N270 Processor
- Intel® 945GSE + ICH7M
- DDR2 400/533MHz SODIMM, Up to 2 GB
- Gigabit Ethernet x 2, RJ-45 x 2
- Up to 24-bit Dual-channel LVDS, CRT, DVI (Optional)
- AC97 2.3 Codec Audio
- CompactFlash™ x 1, EIDE x 1, SATA 1.5Gb/s x 2
- USB2.0 x 6, COM x 4, 8-bit Digital I/O
- PCI-104, PCIe/104 (Optional)
- Wide DC Voltage Input: +12V ~ +19V
- 4/5-wire Touch Screen Controller
- Optional RAID 0 & 1
- IEEE 1588 Compatible

Specifications

System	
Form Factor	EPIC Express Board
Processor	Onboard Intel® Atom™ N270 Processor 1.6GHz, FSB: 533/667MHz
System Memory	200-pin DDR2 400/533MHz SODIMM x 1, up to 2GB
Chipset	Intel® 945GSE + ICH7M
I/O Chipset	ITE8781
Ethernet	Intel® 82574L for 10/100/1000Base-TX, RJ-45 x 2
BIOS	Award Plug & Play SPI BIOS - 2 MB ROM
Wake On LAN	Yes
Watchdog Timer	Generates a time-out system reset
H/W Status Monitoring	Supports power supply voltages and temperature monitoring
Expansion Interface	PCI-104, PCIe/104(optional)
Battery	Lithium battery
Power Requirement	+12V ~ 19V
Power Consumption (Typical)	Intel® Atom™ N270 1.6GHz, DDR2 2 GB 1.6A@12V
Board Size	4.5" x 6.5" (115mm x 165mm)
Gross Weight	1.2 lb (0.5Kg)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	60,000
Display	
Chipset	Intel® 945GSE integrated
Memory	Shared system memory up to 224 MB with DVMT3.0
Resolutions	Up to 1920 x 1440 for CRT, Up to 1600 x 1200 for LCD
LCD Interface	24-bit dual-channel LVDS
DVI	DVI-1 x 1 (optional)
I/O	
Storage	EIDE x 1 (UDMA-33 for two devices), SATA 1.5Gb/s x 2, CompactFlash™ x 1
Serial Port	RS-232 x 3, RS-232/422/485 x 1
Parallel Port	SPP/EPP/ECP Mode
USB	USB2.0 x 6
PS/2 Port	Keyboard x 1 + Mouse x 1
Digital I/O	Supports 8-bit (programmable)
Audio	Line-in, Line-out, Mic-in & CD-in
Touch Screen	Supports 4/5-wire resistive touch screen



Packing List

- 1709070500
SATA Cable
- 1700060152
KB/Mouse Cable
- 9657666600
Jumper Cap
- Product CD
- EPIC-9457 Rev. A With Heatsink

