

# PCM-3116

## Mass Storage Modules

■ PC/104 PCMCIA/ CompactFlash™ to IDE Module



### Specifications

Connector	40-pin IDE and 4-pin power connectors
Power Requirement	+5V
Operating Temperature	32°F ~ 158°F (0°C ~ 70°C)

### Features

- Allows System to Access the PCMCIA or CompactFlash™ ATA Card Directly as a Standard IDE Drive
- Type I/II/III PCMCIA and Type I/II CompactFlash™ Cards
- No Driver Required


### Ordering Information

- **TF-PCM-3116**  
PC/104 PCMCIA/ CompactFlash™ to IDE Module
- **TF-PCM-3116CF**  
PC/104 CompactFlash™ to IDE Module
- **TF-PCM-3116PC**  
PC/104 PCMCIA to IDE Module
- **TF-PCM-3116PC/F**  
PCMCIA to IDE Drive with 3.5" Floppy Disk Drive Form Factor

# PCM-FA00

## Mass Storage Modules

■ PCI-104 to Mini-PCI Conversion Module

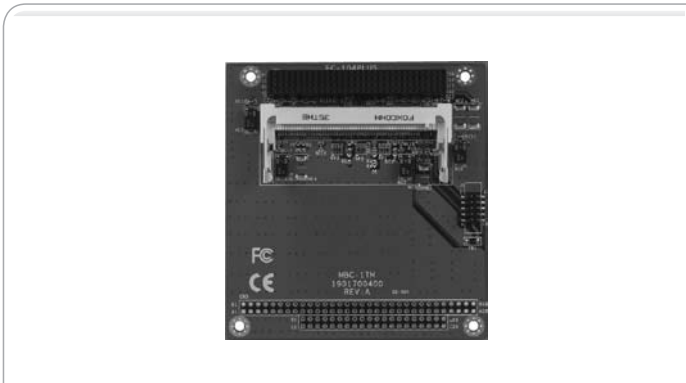

### Specifications

Connector	Mini-PCI Interface
Power Requirement	+3.3V
Operating Temperature	32°F ~ 158°F (0°C ~ 60°C)

### Features

- Type III Mini-PCI
- 32-bit PCI Local Bus
- Power Requirement: +3.3V
- Dimension: 3.55" (L) x 3.78" (W) (90 mm x 96 mm)

### Ordering Information

- **TF-PCM-FA00-A10**  
PCI-104 to Mini-PCI Conversion Module Rev. A1.0