

Features

- **Fanless Design**
- **Supports CompactFlash™, SDIO RJ-45 x 1 for Ethernet**
- **COM x 1, USB Host x 2, USB Client x 1**
- **Supports VGA Output**
- **+9V to +24V DC Input**
- **Desktop, Wallmount (Optional) or Bracket for VESA 75mm Mounting Holes of LCD Monitor (Optional)**




CE FCC

Specifications

System	
CPU Board Support	GENE-1270B
Ethernet	RJ-45 x 1
Expansion Interface	Type II CompactFlash™, SDIO
USB Port	USB Host Type A x 2, USB Client Type B x 1
Serial Port	D-Sub 9 x 1
VGA	D-Sub 15 x 1
Audio	Line out
LED Indicator	Power LED x 1
Power Supply	+9V to +24V DC input
Mechanical & Environmental	
Operating Temperature	32°F ~ 122°F (0°C ~ 50°C)
Vibration	1g rms/ 5~500Hz/ random operation
Dimensions	7"(W) x 4.29"(D) x 1.57"(H) (178mm x 109mm x 40mm)
Construction	Heavy duty steel
Mounting	Bracket for 75mm x 75mm VESA mounting holes
Color	Black
EMC	CE /FCC class B

Dimension Unit: mm

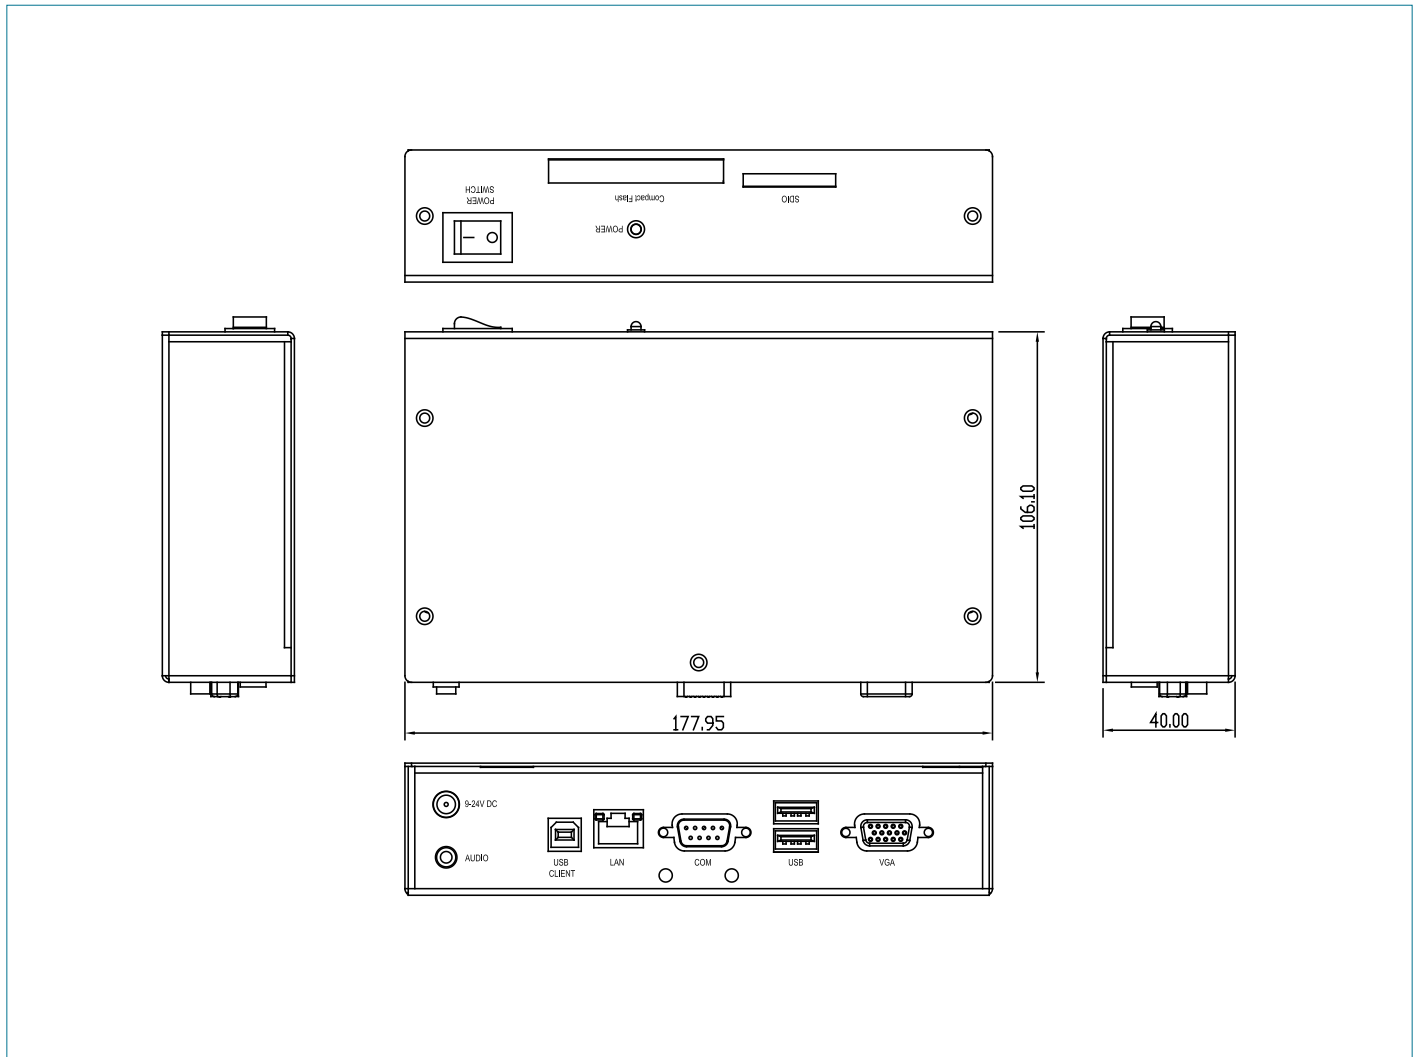

Ordering Information

- **TF-TKS-G11-1270-001**
Chassis Kit, GENE-1270-B10, PXA270-520MHz, 128MB RAM, 128MB Flash, WinCE 5.0 Pro
- **TF-TKS-G11-1270-003**
Chassis Kit, GENE-1270-B10, PXA270-520MHz, 128MB RAM, 128MB Flash, Linux

Optional Accessories

- **9761G11001**
Wallmount Kit
- **9761G11000**
Bracket for VESA 75mm Mounting Holes
- **AP-LN968666660**
SDIO, 802.11 b/g, Wireless LAN Card (For TF-TKS-G11-1270-001)