



Fanless Embedded Box for GENE-5315 Rev.A

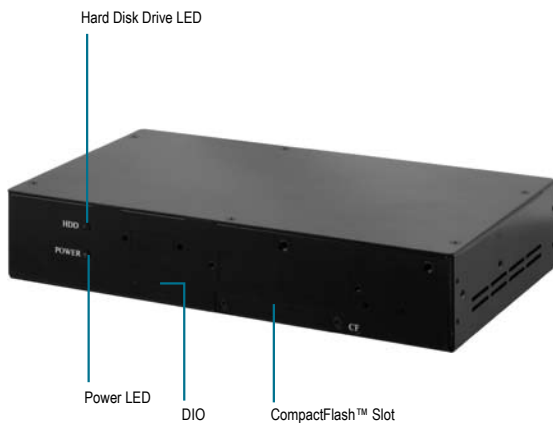

Features

- Fanless Design
- 2.5" Hard Disk Drive And CompactFlash™
- 802.11b/g WiFi (Optional)
- COM x 2, USB x 4, 8-bit Digital I/O (Optional)
- Built-in AC-in Or DC-in Power Supply
- Desktop Or Wallmount (Optional)

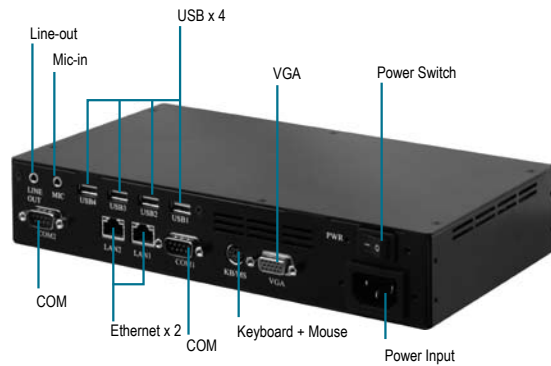


Specifications

System		
CPU Board Support	GENE-5315 (AMD Geode™ LX 800 Processor 500 MHz)	
Display	VGA	D-SUB 15 x 1
	TV-out	—
	DVI	—
Storage	SSD	Type II CompactFlash™ Slot x 1
	Hard Disk	2.5" PATA HardDisk Drive Bay x 1
LAN	Ethernet	10/100Base-TX Ethernet, RJ-45 x 2
	Wireless	802.11b/g WiFi (Optional)
System I/O	PS/2 Port	PS/2 x 1 for keyboard and mouse through Y cable
	Serial Port	D-sub 9 x 2
	USB Port	USB Type A x 4
	Digital I/O	8-bit Programmable (Optional)
Audio	Line-out, Mic	
IO Expansion	Mini-PCI x 1 (Internal)	
GPS	—	
LED Indicator	Power LED x 1, HDD LED x 1	
Power Supply	DC Input	AT or ATX type, +9V ~ +30V Input
	AC Input	AT type, 100V ~ 240V Input
System Cooling	Fanless	
Mechanical & Environmental		
Operating Temperature	32°F ~ 104°F (0°C ~ 40°C)	
Vibration	0.5g rms/ 5~500Hz/ random operation	
EMC	CE /FCC class A	
Dimensions	10"(W) x 5.75"(D) x 1.93"(H) (254mm x 146mm x 49mm)	
Construction	Heavy duty steel	
Mounting	Desktop or Wallmount (Optional)	
Color	Black	

TKS-G30-5315A

Dimension Unit: mm

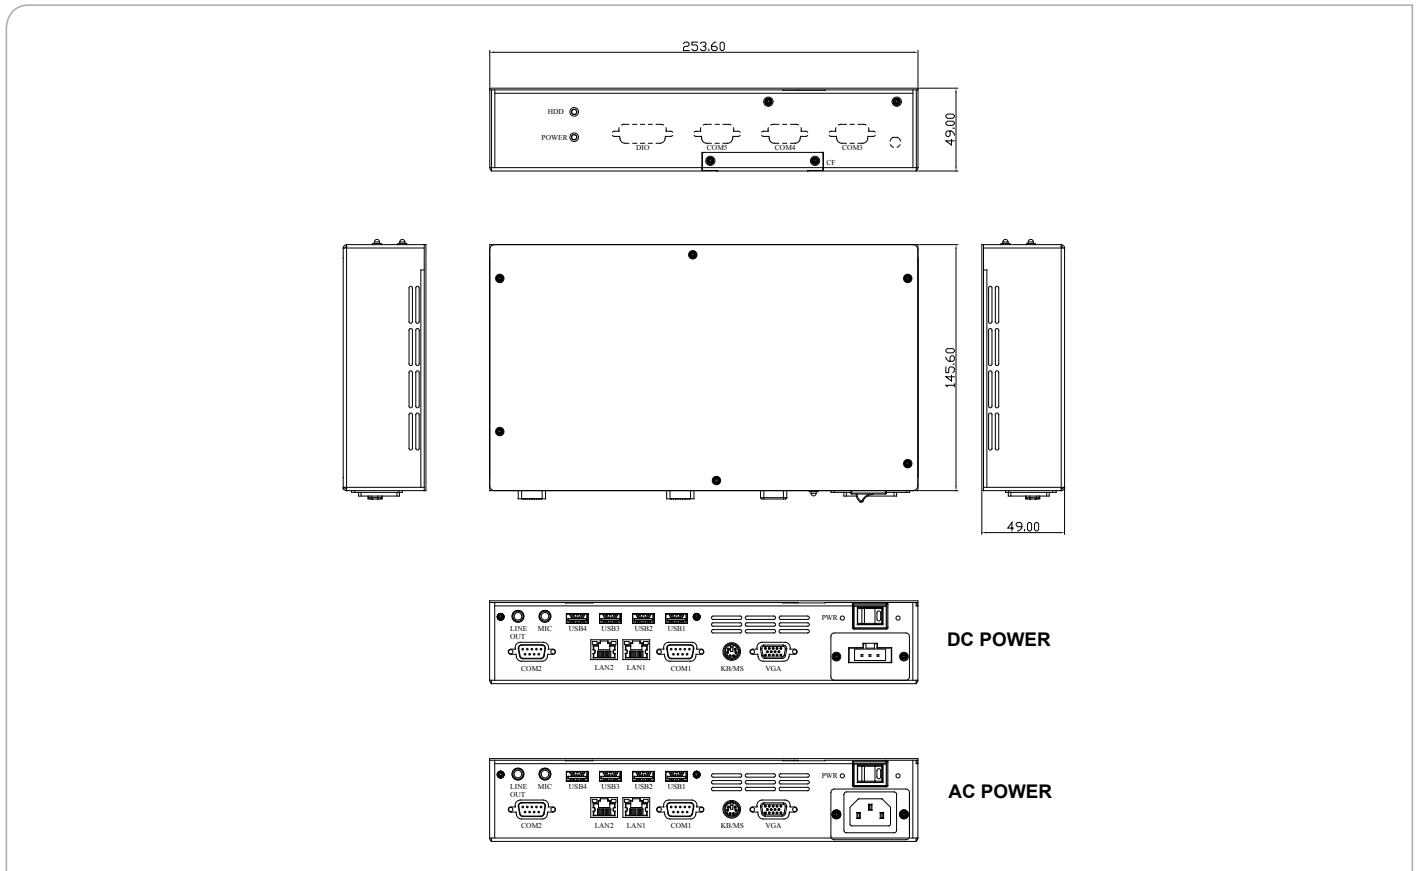

Ordering Information

- **TF-TKS-G30-5315-003-DX/DT/AT**
Fanless Embedded Box, GENE-5315-A11, LX 800 500 MHz, (DX: DC-ATX/ DT:DC-AT/ AT: AC-AT)

Optional Accessories

- **9761G50000**
Wallmount Kit
- **9741666646**
802.11b/g Wireless LAN Kit
- **1701150201**
Digital I/O Cable
- **1757908401**
84 Watts Power Adapter