

## Features

- Intel® Core™ 2 Duo/ Core™ Duo/ Celeron® M Processor
- Intel® 945GME + ICH7M
- SODIMM DDR2 400/533/667 Memory, Max. 2 GB
- 10/100Base-TX Ethernet
- CRT, Up To 24-bit Dual-channel LVDS LCD, SDVO Connector
- AC97 2.3 Codec 2CH Audio
- PATA x 1, SATA 3.0Gb/s x 2
- USB2.0 x 6
- PCI-Express [x1] x 4
- +5V Only Operation



## Specifications

System	
Form Factor	XTX
Processor	Intel® (Socket-478M-based) Core™ 2 Duo/ Core™ Duo/ Celeron® M processor, FSB 533/667 MHz
System Memory	200-pin DDR2 SODIMM x 1, Max. 2 GB (DDR2 400/533/667)
Chipset	Intel® 945GME + ICH7M
I/O Chipset	ITE IT8712KX
Ethernet	Intel® EP82562ET, 10/100Base-TX
BIOS	Award, TSOP type, 2MB ROM
Wake On LAN	Yes
Watchdog Timer	Generates a time-out system reset
H/W Status Monitoring	Supports power supply voltages, fan speed and temperature monitoring
Expansion Interface	PCI-Express [x1] x 4 32-bit PCI x 4 LPC bus x 1 SM Bus x 1 I2C x 1
Power Requirement	+5V DC
Power Consumption (Typical)	C-M 440 1.86GHz, DDR2 667 512 MB 0.33A@+12V, 4.84A@+5V W/ TF-ECB-910M-A10-01
Board Size	4.5" (L) x 3.74" (W) (114 mm x 95 mm)
Gross Weight	0.66 lb (0.3 Kg)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	100,000
Display	
Chipset	Intel® 945GME Integrated
Memory	Shared system memory up to 224 MB/ DVMT 3.0
Resolutions	Up to 2048 x 1536 (QXGA) for CRT Up to 1600 x 1200 (UXGA) for LCD
LCD Interface	18-bit dual-channel LVDS (TF-XTX-945-A11) 24-bit dual-channel LVDS (TF-XTX-945-A11-01)
SDVO Port	SDVO x 1 for TF-XTX-945-A11
I/O	
Storage	PATA x 1 (two devices), SATA 3.0Gb/s x 2
Serial Port	2
Parallel Port	1
USB	USB2.0 x 6
PS/2 Port	Keyboard x 1, Mouse x 1
IrDA	One IrDA Tx/Rx header
Audio	Mic-in, Line-in, Line-out


## Packing List

- M2.5 Screw x 4
- Product CD
- XTX-945

# XTX-945

## Dimension

Unit: mm

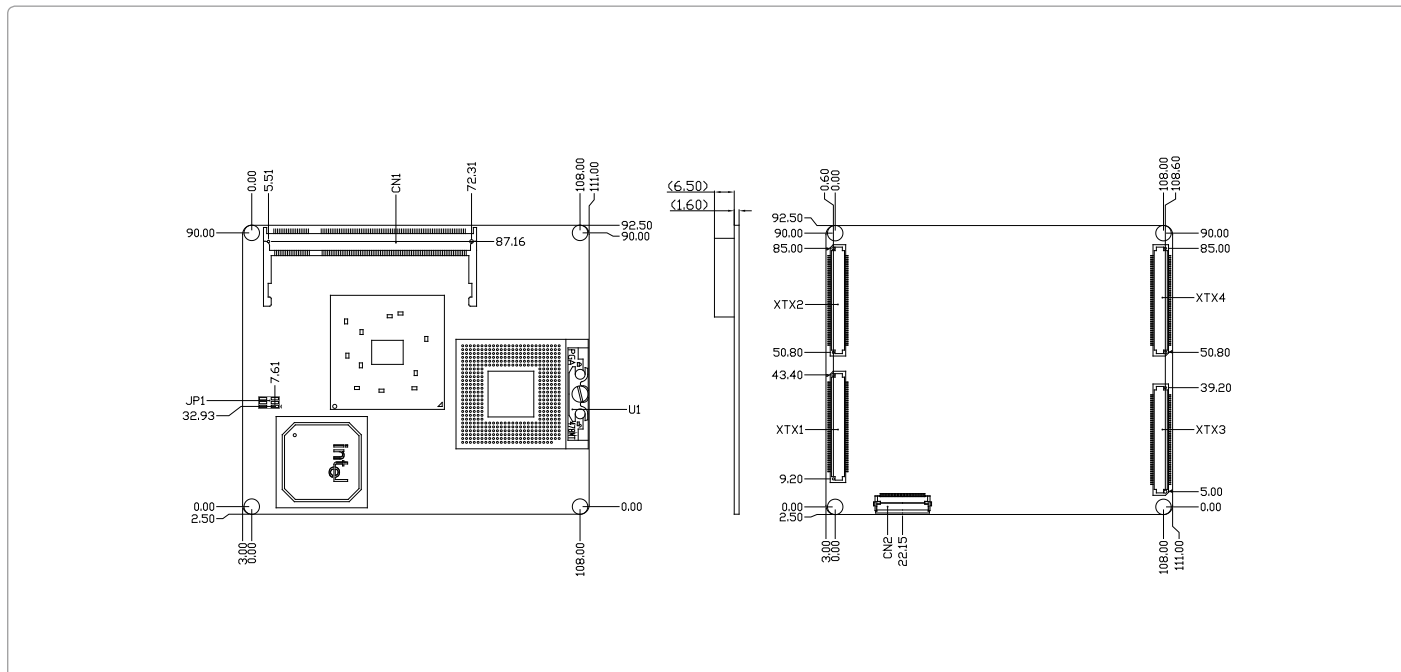

## Ordering Information

Part Number	CPU	Memory	Display	LVDS	Storage	LAN	USB2.0	KB/MS	URAT	LPT	Expansion Slot	Power	Temp
TF-XTX-945-A11	Intel® Core™2 Duo Mobile (Socket M)	DDR2 SODIMM x 1 Max.2GB	CRT, LVDS, SDVO	18-bit dual channel	SATA2 x 2 PATA x 1	FE x 1	6	1	2	1	PCI-E[1] x 4 32-bit PCI x 4	5V	0°C~60°C
TF-XTX-945-A11-01	Intel® Core™2 Duo Mobile (Socket M)	DDR2 SODIMM x 1 Max.2GB	CRT, LVDS, SDVO	24-bit dual channel	SATA2 x 2 PATA x 1	FE x 1	6	1	2	1	PCI-E[1] x 4 32-bit PCI x 4	5V	0°C~60°C

## Optional Accessories

- TF-ECB-910M-A10-01**  
 XTX Carrier Board, LAN, Audio, 4 COM, USB, PCI-E, 2 SATA 2, TPM, AT/ ATX, Rev. A1.0 (For XTX-945, XTX-945GSE)
- TF-PER-A044**  
 CPU Cooler, for Socket-Type CPU, With 12V Fan
- TF-PER-A046**  
 Passive Heatsink, for XTX-945/ XTX-945GSE Socket-Type CPU
- TF-PER-A048**  
 Heat Spreader Kit, for XTX-945/ XTX-945GSE Socket-Type CPU
- TF-PER-V03B-A10-02**  
 SDVO to DVI Module
- TF-PER-V04B-A10-02**  
 SDVO to LVDS Module