


BP-208SG-P4



Keyboard (KB1,2,5)

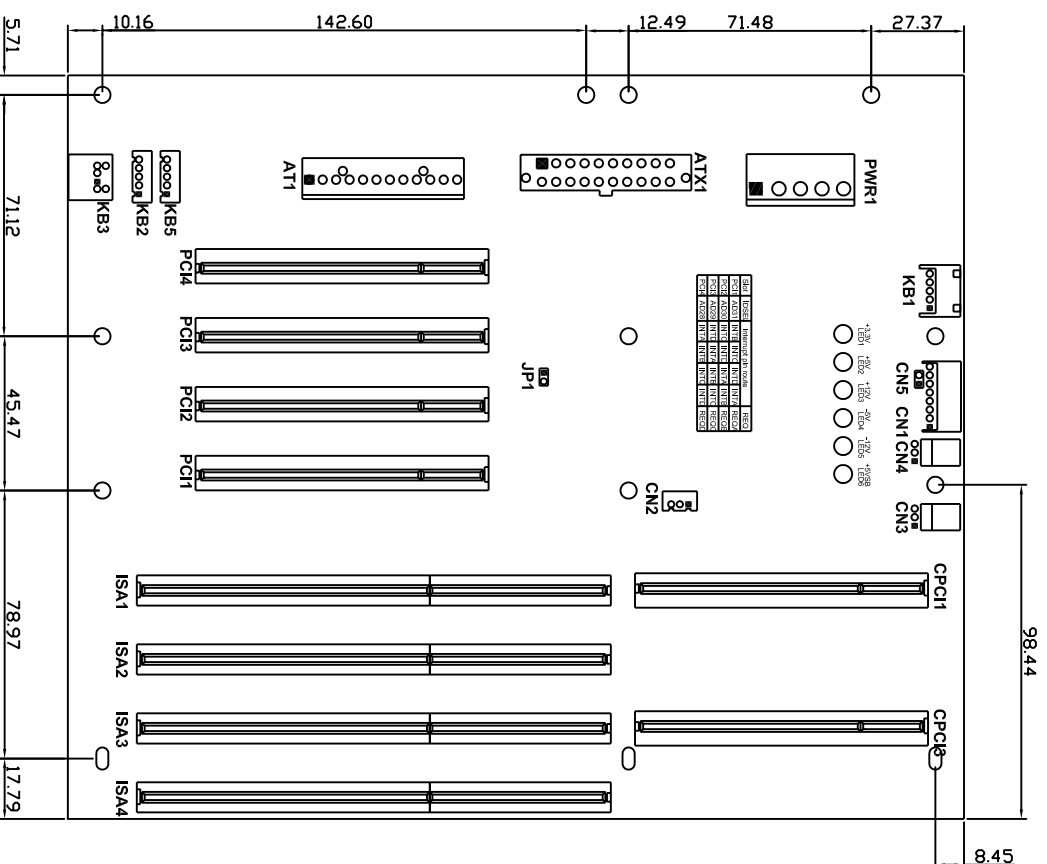


Pin1:KB_CLOCK
Pin2:KB_DATA
Pin3:NC
Pin4:GND
Pin5:VCC

Fan(CN3,4)



Pin1:GND
Pin2:+12V
Pin3:NC

Alarm(CN1)



Pin1:+5VSB
Pin2:+12V
Pin3:+3.3V
Pin4:-12V
Pin5:+5V
Pin6:SMB_CLK
Pin7:SMB_DATA
Pin8:GND

PS-ON(CN2)



Pin1:PS-ON
Pin2:GND
Pin3:+5VSB

SMBus(CN5)



Pin1:SMB_CLK
Pin2:SMB_DATA

PCI Rounting Table

Slot	IDSEL	Interrupt pin route	REQ
PCI1	AD31	INTB INTC INTD INTA	REQA
PCI2	AD30	INTC INTD INTA INTB	REQB
PCI3	AD29	INTD INTA INTB INTC	REQC
PCI4	AD28	INTA INTB INTC INTD	REQD

Note:

ATX Power Used:

1. PCI Slot 3.3V Power is Available
2. PICMG Slot 3.3V Power is Available PICMG 3.3V Pin : A21,A27,A33,A39,A45,A53,B25,B31,B36,B41,B43,B54

AT Power Used:

1. No support for 3.3V PCI card when AT power supplys used
2. No support 3.3V Power for PICMG
3. If need 3.3V power , Must option JP1 Function