



AEV-6356

Railway Box PC With Onboard Intel® Core™ i7/ Celeron® M Processor

Front View

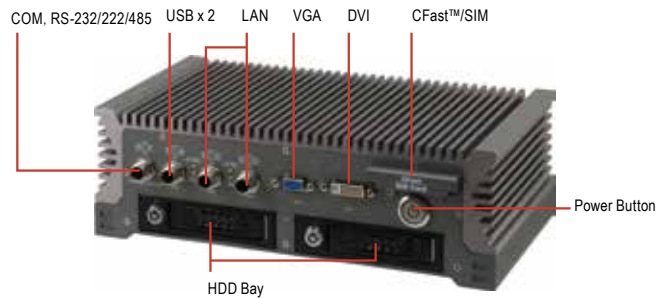

Rear View

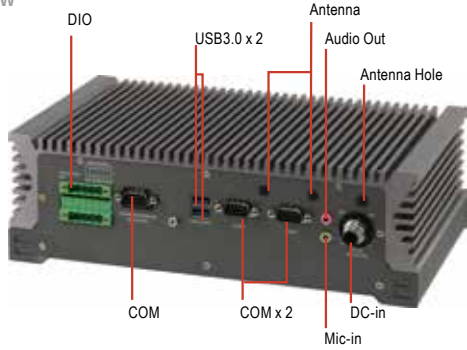

Specifications

System	
Processor	Intel® Core™ i7-3517UE up to 2.8GHz, Intel® Celeron® 827E ,1.4 GHz
Chipset	Intel® QM77
System Memory	DDR3 SODIMM x 1, Max.8GB
Display Interface	DB-15 x 1 for VGA DVI-D x 1
Storage Device	CFAST™ x 1, SATA 3 x 2 (Support RAID 0,1)
Front I/O connector	USB 2.0 x 2 (M12), RS-232/422/485 x 1 (M12), Giga LAN x 2 (M12), VGA x 1 (DB-15), DVI-I x 1, Power button, CFAST slot x 1, SIM slot x 1
Rear I/O connector	Digital Input x 6, Digital Output x 2, USB 3.0 x 2 (Type A), RS-232 x 2 (DB-9), RS-232/422/485 x 1 (DB-9, Isolation), Line-out x 1, Mic x 1, Power input (17 ~ 30VDC) (M12)
Digital Input	Digital Input x 6 Digital Output x 2 USB 3.0 x 2 (Type A) RS-232 x 2 (DB-9) RS-232/422/485 x 1 (DB-9, Isolation) Line-out x 1, Mic-in x 1 Power input (17 ~ 30VDC) (M12)
Digital Output	Output Channels: 2, sink type Output Current: Max. 200 mA per channel On-state Voltage: 24 VDC nominal, open collector to 30 VDC Connector Type: 10-pin screw terminal block (6 DI points, 2 DO points, DI Source, GND) Isolation: 3 KV optical isolation
Serial Interface	RS-485: isolation 3000VDC (Rear I/O)
Expansion Slot	Full-size mini PCIe x 1 Half-size mini PCIe x 1 (WiFi/ 3G/ GPS)(Optional)
Indicator	System LED x 1
OS Support	Window® XP Embedded, Window® XP, Window® 7, Window® Embedded Standard 7, Linux Fedora
Mechanical	
Mounting	Wall / Din-rail
Dimension	11.26" x 6.46" x 3.62" (286mm x 164.2mm x 92mm)
Gross Weight	15.4 lb (7Kg)
Net Weight	—
Power Supply	
DC Input	DC 17 ~ 30V (M12) Over-voltage protection Low-voltage protection Short circuit protection

Features

- Intel® Core™ i7-3517UE or Celeron® 827E Onboard
- EN50155Tx Certified
- Well-protection:
Isolation RS-232/422/485 x 1/ Power (OVP/ LVP/ SCP)
- Easy-to-control:
Isolation Digital Input x 6 + Digital Output x 2
Wireless Solution: WiFi/ 3G/ GPS
Rugged M12 Connector for LAN/ Serial/ USB/ Power
- Power Input: 17V~30V Certificated, and 17V~75V Compliant




Environment Test

System	
Operation Temperature	-40°F ~ 158°F(-40°C ~ 70°C)(85°C for 10 Minutes)
Humidity	Conforms to EN 50155/EN50125-1, Test method EN 60068-2-30 (variant 1): Yearly average at 75 % HR, 30 days at 95 % HR, Occasionally at 100 % HR Tropicalisation and mist constraints
Altitude	<2500meters
Salt Mist	Conforms to EN50155
Insulation Resistance	Conforms to EN50155
Voltage withstand	-Conforms to EN50155, -Power supply voltage range conforms to Italian standard ST306158 0,6<U/Un<1,5 -Power supply variation conforms to Italian SCMT 0,6<U/Un<1,67 during 0,1sec -Power supply voltage switching (EN 50155 § 3.1.3) Class C1: 100 ms (0.6 Un during 100 ms of the battery at Un)
Mechanical Earth Continuity	Conforms to Standard STM-E-001 Acceptance criteria = R<100 mΩ Every metallic part accessible to the user must be connected to the mechanical earth (NF F 60100)
Pollution	Compliant with : EN60721-3-5 standard
EMC	Compliant with EN50121 standard
ESD	Conforms to EN 50155
Expansion Slot	Full-size mini PCIe x 1/ Half-size mini PCIe x 1
Radiated Electromagnetic Fields	Radiated immunity Test method EN 61000-4-3: The frequency range for the tests shall be done until 2.4 GHz, and an attenuation of 20 V/m.
Immunity To Fast Transients Bursts	Conforms to Standard reference : EN 50155 (§ 10.2.7) / EN 50121-3-2 Fast transient burst immunity, Test method EN 61000-4-4, ± 2,6 kV- repetition frequency: 5 kHz, ports referenced to the battery: direct injection, other signals: capacitive coupling.
Surges Immunity	Standard reference : EN 50155 (§ 10.2.6.2) / EN 50121-3-2 Surge immunity, Test method EN 50155 (§ 10.2.6.2), Waveform A:±1.8 kV (5-50µs, 50hm) on the battery reference ports, Waveform B: ± 8.4 kV (0,05 µs -0,1 µs, 100 ohm) on the battery reference ports.
Conducted Disturbances Induced By Radio-Frequency Fields	Test method EN 61000-4-6, 150kHz-80MHz 1kHz, 80%AM, 10 Vrms
Emission Measurement	Conducted emissions Standard reference : EN 50155 (§ 10.2.8.2) / EN 50121-3-2 Radiated emission, Test method EN 55011, Class A, 30MHz-230MHz 40dBµV, 230MHz-2.4GHz 47dBµV.
Protection Against Electrical Hazards	PD2 environment as defined in EN50124 Over-Voltage degree (OV2)Rationale : It is not acceptable to always export the constraints on rolling stock as other signalling suppliers propose a solution into a box.
Fire And Smoke	Conforms to NF F 16101 for cables and NF F 16102 for equipment
Shocks And Vibrations	Test method EN 61373 (random vibration), Operating test (duration > 10 min), Frequency range = 5-150 Hz, 0,7 m/s2 (longitudinal & transversal axis), 1 m/s2
	Test method EN 61373 (random vibration), Frequency range = 5-150 Hz, Test with equipment powered down for 5 hr, 5,5 m/s2 (longitudinal & transversal axis). Test method EN 61373 (random vibration), 50 m/s2 for 30 ms (longitudinal & transversal axis), 30 m/s2 for 30 ms (vertical axis), 3 shocks x 2 directions x 3 axes = 18 shocks

AEV-6356

Dimension

Unit: mm

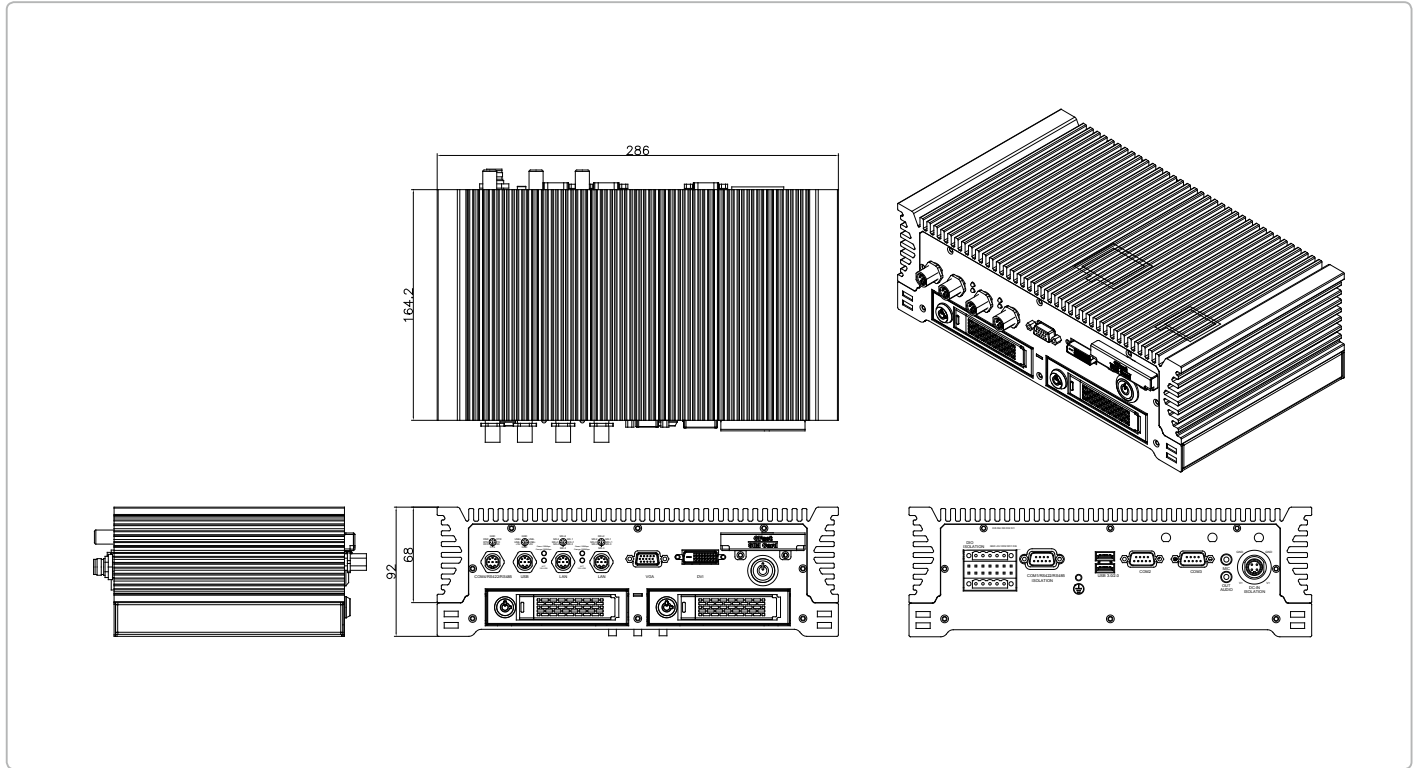

Ordering Information

Part Number	CPU	RAM	LAN	USB 2.0	RS-232	RS-232/422/485	DIO	Storage	Display	Expansion	Mounting	Power	Operation temp.
AEV-6356-A1-1010	Core™ i7-3517UE	8GB (Max.)	2	USB 2.0 x 2, USB 3.0 x 2	1	2	DI x 6, DO x 2	Cfast x 1	VGA x 1, DVI-D x 1	Full size mini PCIe x 1, Half size mini PCIe x 1	Wall	17 ~ 30V certificated by EN50155, 17 ~ 75V compliant with EN50155	-40°C ~ 70°C (85°C for 10 minutes)
AEV-6356-A2-1010	Celeron® 827E	8GB (Max.)	2	USB 2.0 x 2, USB 3.0 x 2	2	2	DI x 6, DO x 2	Cfast x 1	VGA x 1, DVI-D x 1	Full size mini PCIe x 1, Half size mini PCIe x 1	Wall	17 ~ 30V certificated by EN50155, 17 ~ 75V compliant with EN50155	-40°C ~ 70°C (85°C for 10 minutes)
AEV-6356HDD-A1-1010	Core™ i7-3517UE	8GB (Max.)	2	USB 2.0 x 2, USB 3.0 x 2	2	2	DI x 6, DO x 2	Cfast x 1, 2.5" HDD x 2	VGA x 1, DVI-D x 1	Full size mini PCIe x 1, Half size mini PCIe x 1	Wall	17 ~ 30V certificated by EN50155, 17 ~ 75V compliant with EN50155	-40°C ~ 70°C (85°C for 10 minutes)
AEV-6356HDD-A2-1010	Celeron® 827E	8GB (Max.)	2	USB 2.0 x 2, USB 3.0 x 2	2	2	DI x 6, DO x 2	Cfast x 1, 2.5" HDD x 2	VGA x 1, DVI-D x 1	Full size mini PCIe x 1, Half size mini PCIe x 1	Wall	17 ~ 30V certificated by EN50155, 17 ~ 75V compliant with EN50155	-40°C ~ 70°C (85°C for 10 minutes)

Packing List

- Wallmount Bracket x 2
- M12 Power DC Jack Kit x 1
- M12 USB Y Cable x 2
- M12 COM Cable x 1
- M12 LAN Cable x 2
- Product DVD
- AEV-6356

Optional Accessories

- **1700080308**
USB x 2 Y Cable with M12 Connector
- **1700090309**
COM Cable x 1 with M12 Connector
- **1700080309**
LAN Cable x 1 with M12 Connector
- **M996356000**
Waterproof Power Kit
- **9761635600**
3G & GPS Module
- **9761635601**
WiFi 802.11 b/g/n Module