
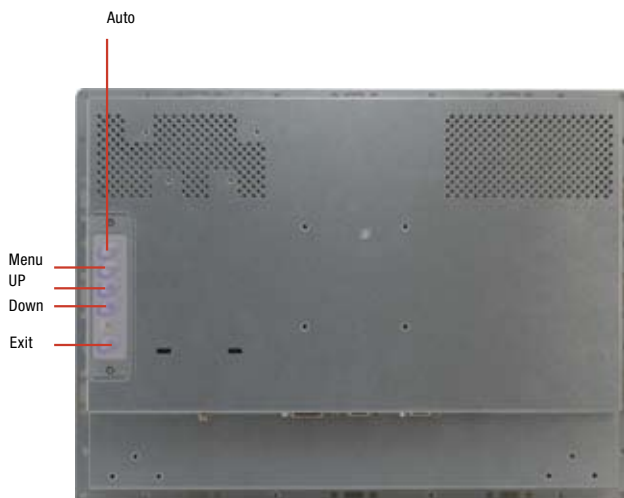


AGD-315P

15" XGA Rugged Touch Display

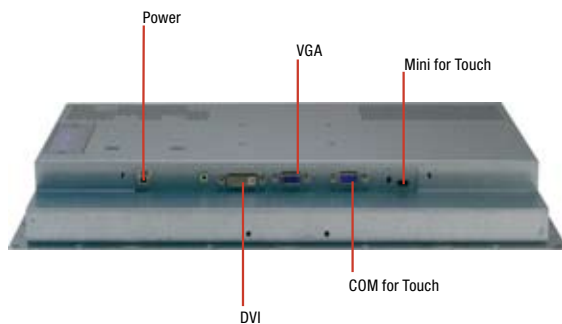

Features

- 15" XGA (1024 x 768) TFT LCD Display
- Open-Frame Design
- 5-Wire Resistive Touch Screen
- OSD for Menu/Auto/Exit/Up/Down
- Metal Structure




Specifications

System	
Input Signal	VGA/DVI
On Screen Display Control	MENU, AUTO, LCD On/Off, UP, DOWN
I/O Connector	VGA/DVI, RS-232/ mini-USB (For T/S), DIP Switch, USB x 2 (AGD-315DHTT-A2)
OS Support	Windows® XP, Windows® CE, Windows® 7, Linux Fedora
Mechanical	
Construction	Metal Open Frame
Mounting	VESA 75/100
Dimension	16.34" x 12.48" x 1.93" (415mm x 317mm x 49mm)
Carton Dimension	23.03" x 21.26" x 8.66" (585mm x 540mm x 220mm)
Gross Weight	19.14 lb (8.7 Kg)
Net Weight	13.2 lb (6 Kg)
Environmental	
Operating Temperature	32°F ~ 122°F (0°C ~ 50°C)
Storage Temperature	-4°F ~ 158°F (-20°C ~ 70°C)
Storage Humidity	5%~95% @ 40°C; non-condensing
Vibration	1 g rms/ 5~500Hz/ Random operation
Shock	20 G peak acceleration (11 msec. Duration)
EMC	CE/FCC Class A
Power Supply	
DC Input	DC 12V, w/AC power adapter w/ lock (in package)
LCD	
Display type	15" TFT-LCD, CCFL
Max Resolution	1024 x 768
Max. Colors	16.2M colors (6/8-bit for R,G,B)
Luminance	250 cd/m ²
Viewing Angle	170°(H), 160°(V)
Back Light	CCFL
Back Light MTBF (hours)	30,000
Touchscreen	
Type	5-wire resistive
Light Transmission	83%

AGD-315P

Dimension

Unit: mm

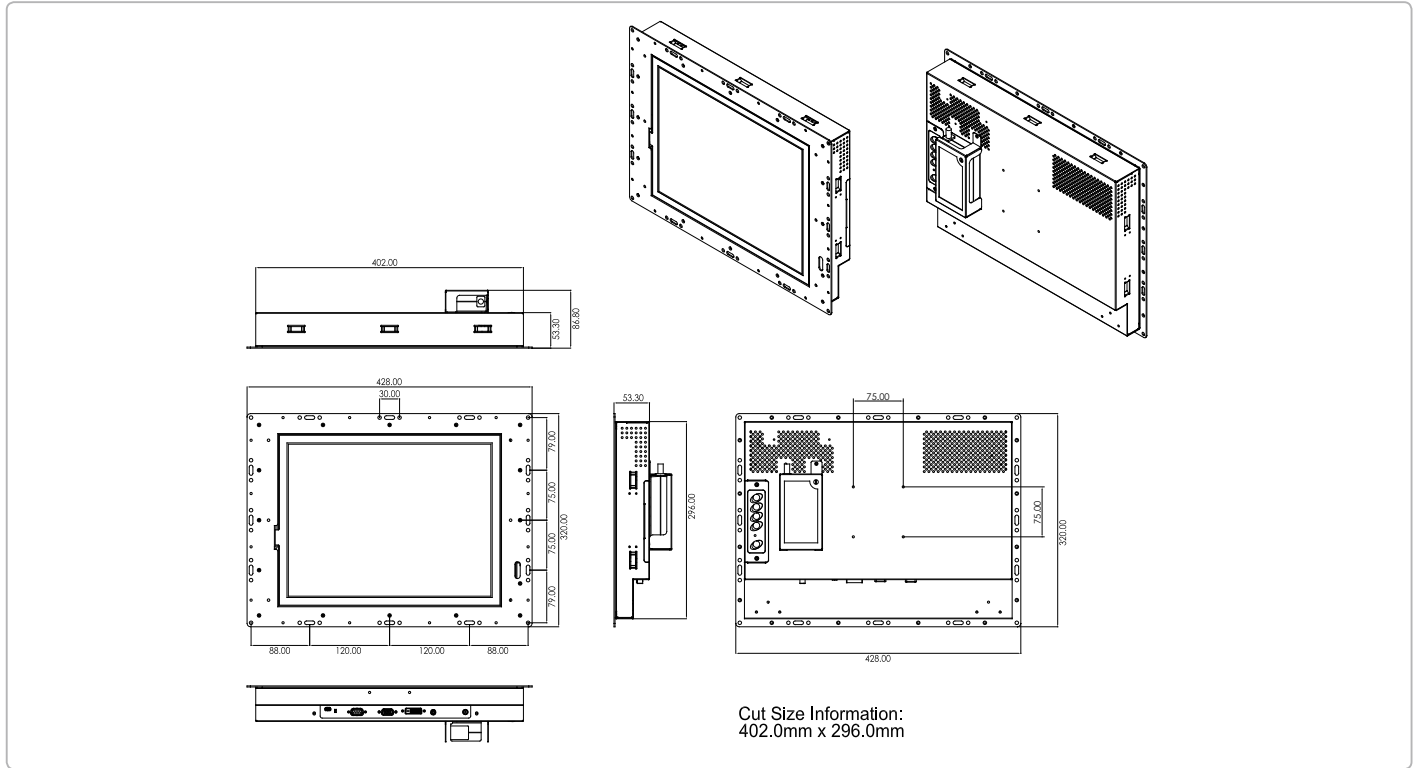

Ordering Information

- **TF-AGD-315PHTT-A1-1010**
15" Open Frame Display, 250nits, 1024 X 768, 12V DC in, R-TS

Optional Accessories

- **1702031802**
Power Cord (US Type)
- **1702031803**
Power Cord (European Type)
- **170203180E**
Power Cord (Japanese Type)
- **1757306004**
AC/DC.12V. Power Adapter, 60W. with Lock
- **AP-OT-9789LA1000**
Desktop Stand
- **ARM-WK075-0**
Wallmount Kit for VESA 75/100mm Standard Screw Holes