


# NIM-C13D

Intel® 82580EB (i350-AM4; Optional by request) PCI-Express 1G Copper Ethernet 4 Ports Module

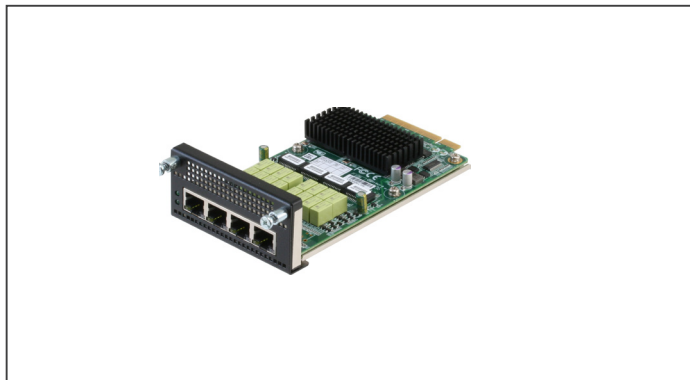

## Specifications

Main Specification	
Form Factor	1G Copper Module
Main Chipset	Intel® 82580EB (i350-AM4; Optional by request) Ethernet Controller x 1
Bypass	2
Host Interface	PCI-Express [x4]
LAN Port	1GbE Connector x 4
Indicator	LED x 4 for Active/Link
Qualification	CE/FCC Class A
Operation Temp.	32°F ~ 104°F (0°C ~ 40°C)
Dimension	5.71" x 3.03" (145mm x 77mm)

## Features

- PCI-Express Host Interface



## Network Appliance Options

- FWS-7360
- FWS-7541
- FWS-7830
- FWS-7831
- FWS-7821
- FWS-7820
- FWS-7840
- FWS-8600


## Ordering Information

### • NIM-C13D-B10-G42-0002

Intel 82580EB.1G Copper LAN 4Ports.for FWS-7820/7821/7830/7831/7360/8600.w/2 bypass

# NIM-S26B

Intel® XL710 PCI-Express 40G QSFP 2 Ports Module

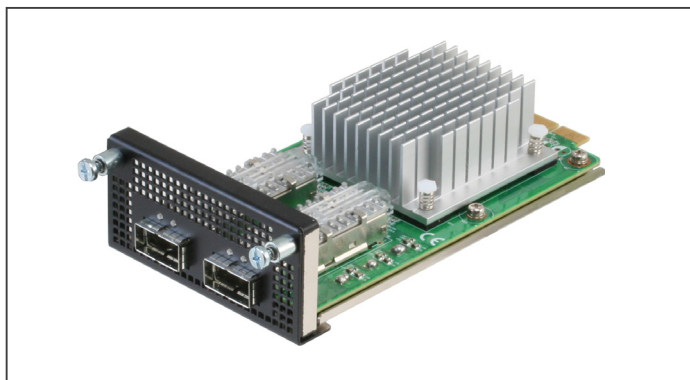

## Specifications

Main Specification	
Form Factor	40G Fiber Module
Main Chipset	Intel® Fortville XL710 Ethernet Controller x 1
Bypass	—
Host Interface	PCI-Express [x8]
LAN Port	QSFP 40GbE Connector x 2
Indicator	LED x 2 for Active/Link
Qualification	CE/FCC Class A
Operation Temp.	32°F ~ 104°F (0°C ~ 40°C)
Dimension	5.71" x 3.03" (145mm x 77mm)

## Features

- PCI-Express Host Interface
- 40 GbE QSFP Fiber Port x 2



## Network Appliance Options

- FWS-7360
- FWS-7830
- FWS-7831
- FWS-7821
- FWS-7820
- FWS-7840
- FWS-8600

## Ordering Information

### • NIM-S26B-A10-F20-0002

Intel® XL710 PCI Express 40GbE QSFP 2 Ports Module for FWS-7820/7821/7830/7831/7360/8600