


PC/104 Power Supply Module

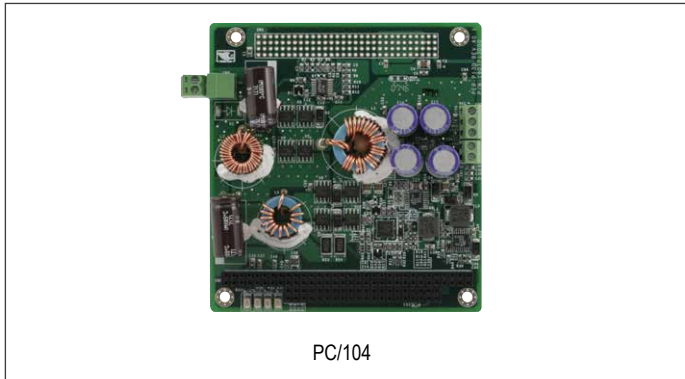

PC/104

Specifications

Power Input	+7V to 30V
Power Output	+5V, +12V DC / 50Watts
Board Size	3.55" (L) x 3.775" (W) (90mm x 96mm)
Operating Temperature	-40°F ~ 185°F (-40°C ~ 85°C)

Features

- 50W Output
- +7V to 30V Input Range
- PC/104 Compliant

Packing Information

- Quick Installation Guide
- PFM-P13DW2

Ordering Information

- TF-PFM-P13DW2-A10
PC/104 Board, Power Supply Module with +5V & +12V Output, PC/104, Rev.A1.0, WITAS 2

PCM-3660 Rev. B

PC/104 Ethernet Module



Specifications

I/O Address	200, 220, 240, 260, 280, 2A0, 2C0, 300, 320, 340, 380, 3A0
Interrupt Level	IRQ 3,4,5,9,10,11,12 or 15
Boot ROM Address	C0000, C8000, D0000 or D8000H (Optional)
Data Bus	8-bit, 16-bit, or auto-sensing
Standard	IEEE 802.3 10Mbps CSMA/CD 10Base-T Transceiver
Power Consumption	+5V@400mA max
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)

Features

- Hardware and Software Compatible with Novell® NE2000
- Automatically Detects 8-bit or 16-bit Data Bus
- Pure PC/104 Interface for 10Base-T Ethernet

Ordering Information

- TF-PCM-3660-B10
PC/104 Board 10Base-T Ethernet Module

Communication Modules