


# UP POE V2 Expansion Board

UP POE V2 Expansion Board for UP 4000, UP 7000, UP Squared V2

UP-POEV2-30W-A10-0001

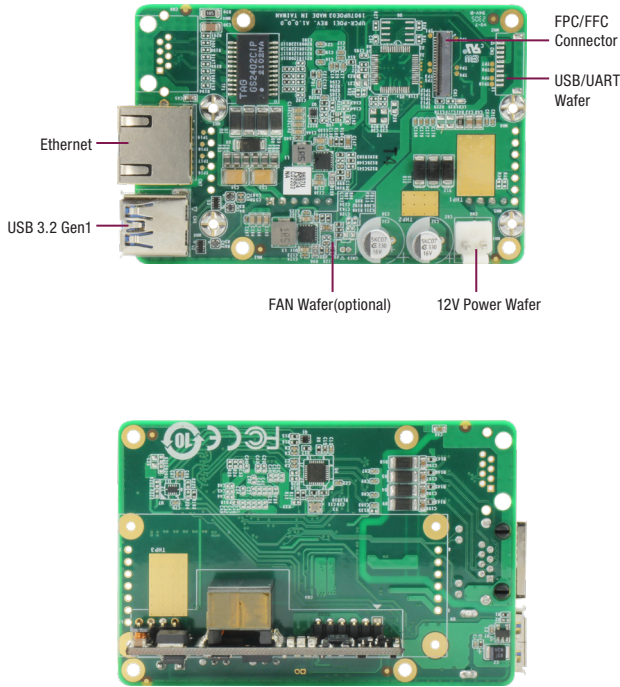

## Features

- POE+ (IEEE 802.3at Type 2)
- Max 25W Power Supply



Giga LAN

## Specifications

System	
I/O	UP-POEV2-30W-A10-0001: RJ-45 Input x 1 (10/100/1000M Gigabit Ethernet) USB 3.2 Gen 1 x 1 41-Pin FPC Connector x 1  UP-POEV2-30W-A10-0002: RJ-45 Input x 1 (10/100M) 10-Pin Wafer x 1
Dimension	3.37" x 2.22" (85mm x 56mm)
Net Weight	0.1 lb. (0.04Kg)
Gross Weight	0.13 lb. (0.06Kg)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C), 0.5m/s airflow
Operation Humidity	10% ~ 80% relative humidity, non-condensing
Certification	CE/FCC Class A, RoHS Compliant, REACH

## Packing List

- UP POE V2 Carrier Board
- FPC Cable  
UP-POEV2-30W-A10-0001:FPC cable; UP-POEV2-30W-A10-0002: 10-Pin wafer cable
- Power Cable  
DC Jack 5.5x2.1mm to 3.96mm 1\*2P housing.200mm
- Screws/Stud Pack

## Ordering Information

Part Number	Description
UP-POEV2-30W-A10-0001	POE 25W Carrier board for UP 4000
UP-POEV2-30W-A10-0002	POE 25W Carrier board for UP 7000 N50, UP Squared V2 N6210