


DIN Rail Mounting Kit

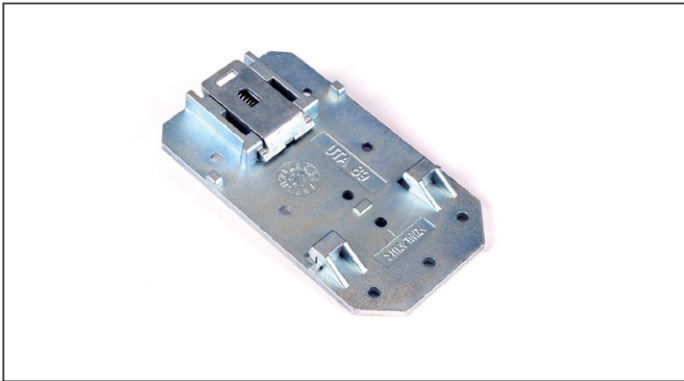

**Features**


- Universal Patented Spring Lock Design
- DIN Rail: NS 35/7.5, NS 35/15
- For AEC-6612/6613, BOXER-6614

**Ordering Information**

- 9741681003  
DIN Rail Mounting Kit

**PER-T479**

PCI-E [x4] Expansion Card with Individual USB 3.0 IC for Machine Vision

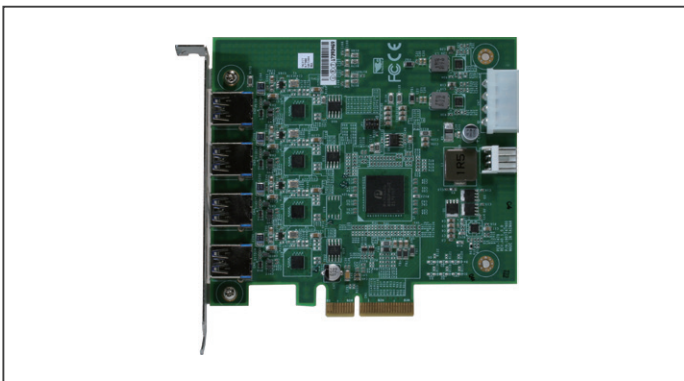

**Features**

- PCI-E [x4] Interface
- Fresco FL1100LX USB 3.0 IC
- USB 3.0 Port x 4



**Ordering Information**

- PER-T479-A10-1  
USB 3.0 Module, PCIe [x4] Expansion Card, Fresco USB 3.0 IC, 4 Port USB 3.0, Rev. A1.0

**Specifications**

System	
Form Factor	PCI-Express [x4]
Chipset	Fresco FL1100LX
Interface	USB 3.0 x 4, 4-Pin +5V DC-in
OS Support	Windows® 10, Windows® 8.1 (32/64-bit), Windows® 7 (32/64-bit)
Power Supply	
Power Requirement	Max. 10W (Board only), Max. 46W (Board + USB 3.0 output)
Mechanical	
Dimensions (W x H x D)	4.33" x 5.35" x 0.79" (110mm x 136mm x 20mm)

Environmental	
Operating Temperature	-4°F ~ 122°F (-20°C ~ 50°C) (according to IEC68-2-14 with 0.5 m/s AirFlow; with industrial devices)
Storage Temperature	-49 °F ~ 176°F (-45°C ~ 80°C)
Storage Humidity	5 ~ 95% @ 40°C, non-condensing