


ACP-5210

21.5" Fanless Multi-Touch Panel PC with AMD G-Series T56N, 2 GB RAM

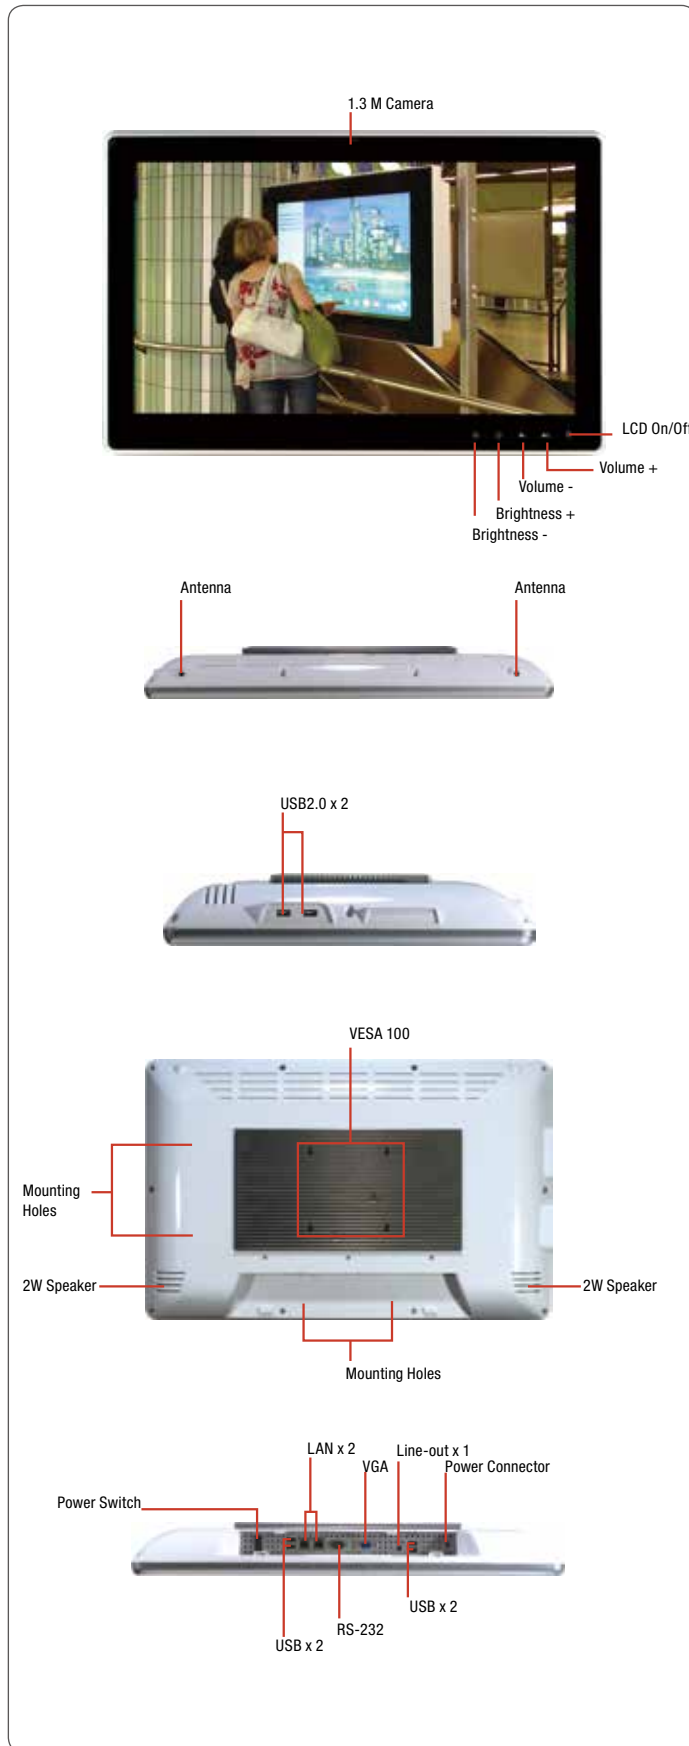

Features

- 21.5" (1920 x 1080) Color TFT LCD Display
- AMD G-Series T56N Processor, 1.6 GHz
- Wide Screen with P-CAP Multi-touch
- Anti-scratch Surface: 7H Surface
- IP65 Compliance Front Bezel
- Fanless System
- VESA 100




Specifications

System	
Processor	AMD G-Series T56N Processor, 1.6 GHz
System Memory	204-pin DDR3 SODIMM up to 4 GB, Default: 2 GB
LCD/CRT controller	AMD A50M
Ethernet	Realtek 8111E for 10/100/1000Base-TX, RJ-45 x 2
I/O Port	RS-232 x 1, USB 2.0 x 6, Line-out x 1, VGA out x 1, RJ-45 x 2, Lockable Power Input Connector, Power switch x 1
Storage Disk Drive	2.5" SATA Hard Disk Driver/ CFast™ (Internal)
Expansion Slot	Mini-PCIe card x 1
OS support	Windows® XP, Windows® 7, Linux Kernel 2.6.3 or higher
Mechanical	
Construction	IP65/NEMA 4 For Plastic Front Bezel, IPX1 For Plastic Chassis
Mounting	VESA 100
Dimension	21.5" x 13.7" x 2.34" (546mm x 348mm x 59.4mm)
Carton Dimension	26" x 19.52" x 7.87" (661mm x 496mm x 200mm)
Gross Weight	18.3 lb (8.3 Kg)
Environmental	
Operating Temperature	32°F ~ 113°F (0°C ~ 45°C) w/airflow 32°F ~ 104°F (0°C ~ 40°C) w/o airflow
Storage Temperature	-4°F ~ 158°F (-20°C ~ 70°C)
Storage Humidity	10%~90% @40°C; non-condensing
Vibration	1 g rms/ 5 ~ 500Hz/ operation – With HDD
Shock	20 G peak acceleration (11 msec. duration) – With HDD
EMC	CE/FCC Class A
Power Supply	
DC input	DC12V , With Power Adapter w/ Lock (In Package)
LCD	
Display Type	21.5" TFT-LCD, LED
Max. Resolution	1920 X 1080
Max. Colors	16.7M colors (6/8-bit for R,G,B)
Luminance	250 cd/m ²
Viewing Angle	170°(H), 160°(V)
Back Light	LED
Back Light MTBF (hours)	30,000
Touchscreen	
Type	Projected Capacitive Touch (two points)
Light Transmission	>88%

ACP-5210

Dimension

Unit: mm

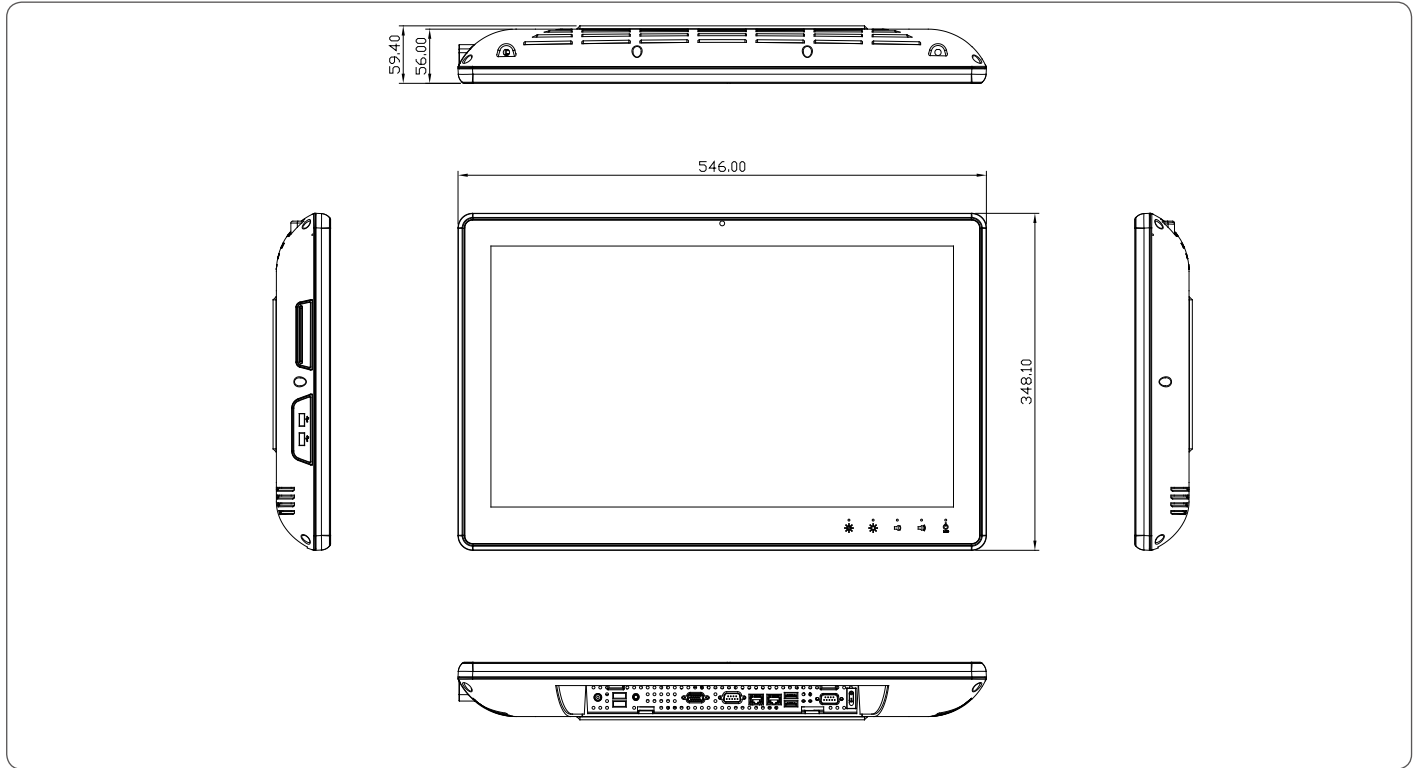

Ordering Information

Part Number	Display Type	Max. Resolution	Luminance	Backlight MTBF	CPU	LAN	USB 2.0	RS-232	RS-232/422/485	Storage	RAM	Display	Expansion	Mounting	Power	Temp.	Touch
ACP-5210HTT-A1-1010	21.5" TFT-LCD	1920 x 1080	250 cd/m ²	30,000	AMD G-Series, T56N, 1.6 GHz	2	6	1	—	CFast™ x 1 2.5" SATA HDD x 1	2 GB	VGA x 1	Mini-Card x 1	VESA 100	DC 12V	32°F ~ 103°F (0°C ~ 45°C) w/airflow 32°F ~ 104°F (0°C ~ 40°C) w/o airflow	Projected Capacitive Touch (Two Points)

Packing List

- HDD Screws
- VESA Screws
- Anti-drop Kits
- Power Adapter
- Product DVD
- ACP-5210

Optional Accessories

- **1702031802**
Power Cord (US Type)
- **1702031803**
Power Cord (European Type)
- **170203180E**
Power Cord (Japanese Type)
- **9761518200**
Smart Card Reader
- **9761518201**
Camera
- **9761518206**
MSR + Mounting Kit
- **9761518205**
Scanner (2D) + Mounting Kit
- **P005212000**
Plastic Cover for Cables
- **ARM-WK075-0**
Wallmount Kit
- **9761215303**
Wireless Module (b/g/n)
- **9761518209**
RFID Module (13.56MHz)
- **PER-M20**
Desktop Stand w/VESA 75/100

If you want to install more than 2 optional accessories, you have to disable one USB port. Please check with your representative if needed.