


21.5" Fanless Multi-Touch Computer with Intel® Core™ i7/i5/Celeron® 1020E Processor, 2 GB RAM



## Features

- 21.5" Full HD (1920 x 1080) TFT LCD Display
- Multi-Touch Window Design (2-Point Under Windows® Professional Version)
- Intel® Core™ i7/i5 Celeron® Processor
- IP65 Front Bezel & IPX1 Back Chassis
- Anti-Scratch Surface (7H Hardness)
- Smart Card Reader/ Magnetic Stripe Reader/ Camera Support (Optional)
- Easy to Clean
- Fanless Operation

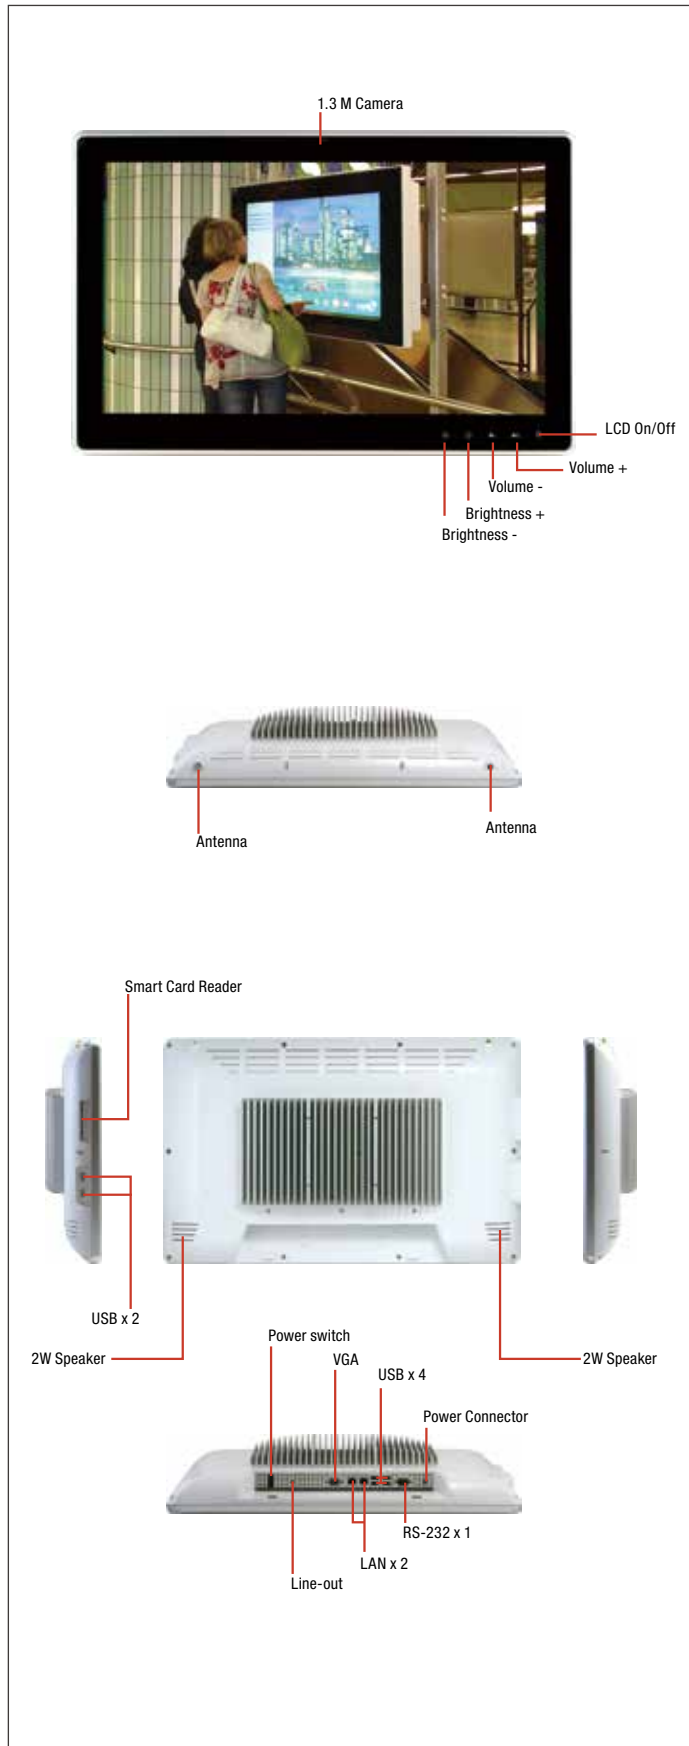


## Specifications

System	
Processor	Intel® Core™ i7-3610QE Intel® Core™ i5-3610ME Intel® Celeron® 1020E
Memory	DDR3 SODIMM x 1, up to 8 GB, default 2 GB
LCD/CRT Controller	Integrated in Intel® QM77 chipset
Ethernet	10/100/1000Base-TX, RJ-45 x 2
I/O Port	RS-232 x 1, USB 2.0 x 6 (2 on side, 4 on rear), Line-out x 1, DVI-I x 1
Storage Disk Drive	2.5" SATA HDD/ CFast™ slot (internal)
Expansion Slot	Mini-Card x 1
OS support	Windows® XP (T/S: Single point), Linux Fedora (T/S: multi-point), Windows® 7 (T/S: multi-point)
Mechanical	
Construction	IP65/ NEMA4 plastic front bezel, IPX1 for plastic back chassis
Mounting	VESA 100
Dimension	21.57" x 13.7" x 2.2" (546mm x 348.1mm x 86mm)
Carton Dimension	26" x 19.52" x 7.87" (661mm x 496mm x 200mm)
Gross Weight	24.2 lb (11 kg)
Net Weight	19.8 lb (9 kg)
Environmental	
Operating Temperature	32°F ~ 104°F (0°C ~ 40°C) (w/o airflow)
Storage Temperature	-4°F ~ 158°F (-20°C ~ 70°C)
Storage Humidity	10~95% @ 40°C, non-condensing
Vibration	1 Grms/ 5~500Hz/ random operation (HDD)
Shock	20 G peak acceleration (11 msec. duration)
EMC	CE/FCC class A
Power Supply	
Dc Input	DC 12V, with lockable AC power adapter
LCD	
Display Type	21.5" TFT-LCD, LED
Max. Resolution	1920 x 1080
Max. Colors	16.7 M colors (6/8-bit for R,G,B)
Luminance	250 cd/m <sup>2</sup>
Viewing Angle	170°(H), 160°(V)
Back Light	LED
Back Light MTBF (hours)	30,000
Touchscreen	
Type	Projected capacitive multi-touch (2-point)
Light Transmission	88%

# ACP-5217

## Dimension

Unit: mm

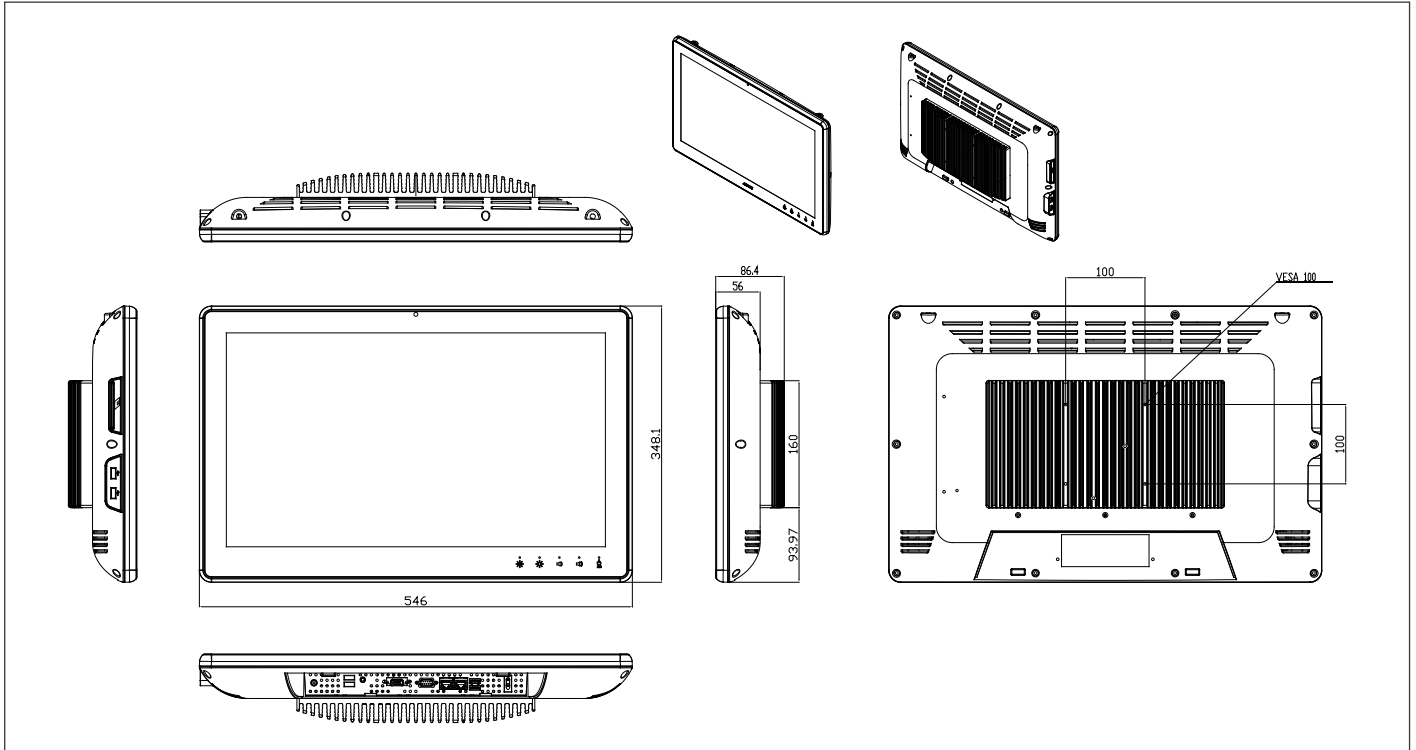

## Ordering Information

Part Number	Display Type	Max. Resolution	Luminance	View Angle	Backlight MTBF (Hours)	CPU	LAN	USB	RS-232	RS-485/422/232	Storage	RAM	Display	Expansion	Mounting	Power	Temp.	Touch
ACP-5217HTT-A1-1010	21.5" TFT-LCD	1920 x 1080	250 cd/m <sup>2</sup>	170(H), 160V	50,000	Intel® Core™ i7-3610QE	2	6	1	—	CF Kit x 1 SATA-HDD kit x 1	2 GB	DVI-I x 1	Mini-Card x 1	VESA 100	DC 12V	0°C ~ 40°C (w/o air)	Projective Capacitive Multi-Touch (2-point)
ACP-5217HTT-A2-1010	21.5" TFT-LCD	1920 x 1080	250 cd/m <sup>2</sup>	170(H), 160V	50,000	Intel® Core™ i5-3610ME	2	6	1	—	CF Kit x 1 SATA-HDD kit x 1	2 GB	DVI-I x 1	Mini-Card x 1	VESA 100	DC 12V	0°C ~ 40°C (w/o air)	Projective Capacitive Multi-Touch (2-point)
ACP-5217HTT-A3-1010	21.5" TFT-LCD	1920 x 1080	250 cd/m <sup>2</sup>	170(H), 160V	50,000	Intel® Celeron® 1020E	2	6	1	—	CF Kit x 1 SATA-HDD kit x 1	2 GB	DVI-I x 1	Mini-Card x 1	VESA 100	DC 12V	0°C ~ 40°C (w/o air)	Projective Capacitive Multi-Touch (2-point)

## Packing List

- HDD Screws
- Power Adapter
- Product DVD
- ACP-5217

## Optional Accessories

- **1702031802**  
Power Cord (US Type)
- **1702031803**  
Power Cord (European Type)
- **170203180E**  
Power Cord (Japanese Type)
- **P005182010**  
Plastic Cover For Cables
- **ARM-WK075-0**  
Wallmount Kit
- **9761115400**  
Wireless Module (b/g/n)
- **PER-M20**  
Desktop Stand w/VESA 75/100

If you want to install more than 2 optional accessories, you have to disable one USB port. Please check with your sales representative if needed.