



Compact Embedded Box PC with CAN Bus

Front View

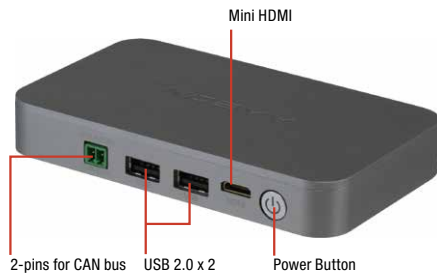

Rear View

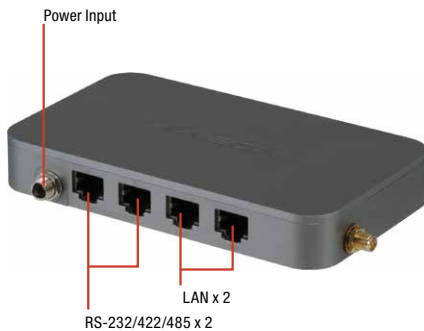


Top View



Features

- Slimmest Fanless Boxer: Compact Design: 20mm
- Uniform I/O Ports: USB & RJ-45 (Ethernet and COM)
- HDMI Display
- Built-in CAN Bus
- Aluminum Enclosure




Specifications

CPU	N2600	
Chipset	Intel® NM10	
System Memory	204-pin DDR3 800/1066 MHz SODIMM x 1, up to 2 GB	
Display Interface	VGA	—
	DVI	—
	HDMI	Mini HDMI x 1
	Others	—
Storage Device	CF-SATA	—
	HDD/SSD	—
	Others	Half-size mSATA
Network	LAN	Gigabit Ethernet
	Wireless	Optional
Front I/O	USB Port	USB type A x 2 for USB 2.0
	LAN	—
	Serial Port	—
	DIO	—
	Audio	—
	KB/MS	—
	Others	Mini HDMI x 1 for HDMI, power button, 2-pins for CAN bus
Rear I/O	USB Port	—
	LAN	RJ-45 x 2
	Serial Port	RJ-45 x 2 for RS-232/422/485 x 2
	DIO	—
	Audio	—
	KB/MS	—
Others	DC-jack w/lock for power input	
Expansion	PCIe	—
	PCI	—
	Mini-Card	—
	Mini PCI	—
Others	Onboard USB pin header x 1 for Touch/WiFi	
Indicator	Front	—
	Rear	—
Power Requirement	12V DC in with lockable connector	
Power Consumption	—	
System Cooling	Passive	
Mounting	VESA 75/100, Din Rail	
Operating Temperature	32°F ~ 104°F (0°C ~ 40°C) (without airflow)	
	32°F ~ 122°F (0°C ~ 50°C) (with airflow)	
Storage Temperature	-4°F ~ 158°F (-20°C ~ 70°C)	
Anti-Vibration	3 Grms/ 5 ~ 500Hz/ operation – mSATA	
Anti-Shock	50 G peak acceleration (11 msec. duration) – mSATA	
MTBF (Hours)	50,000	
Certification	EMC	CE /FCC Class A
	Safety	—
Dimension (W x H x D)	5.35" x 3.13" x 0.79" (136mm x 79.6mm x 20mm)	
Gross Weight	2.64 lb (1.2 Kg)	
Note	Windows® 7 (32 bit), Windows® XP (32 bit), Windows® Embedded Standard 7, Windows® XP Embedded, Linux Federa	

BOXER-6402

Dimension

Unit: mm

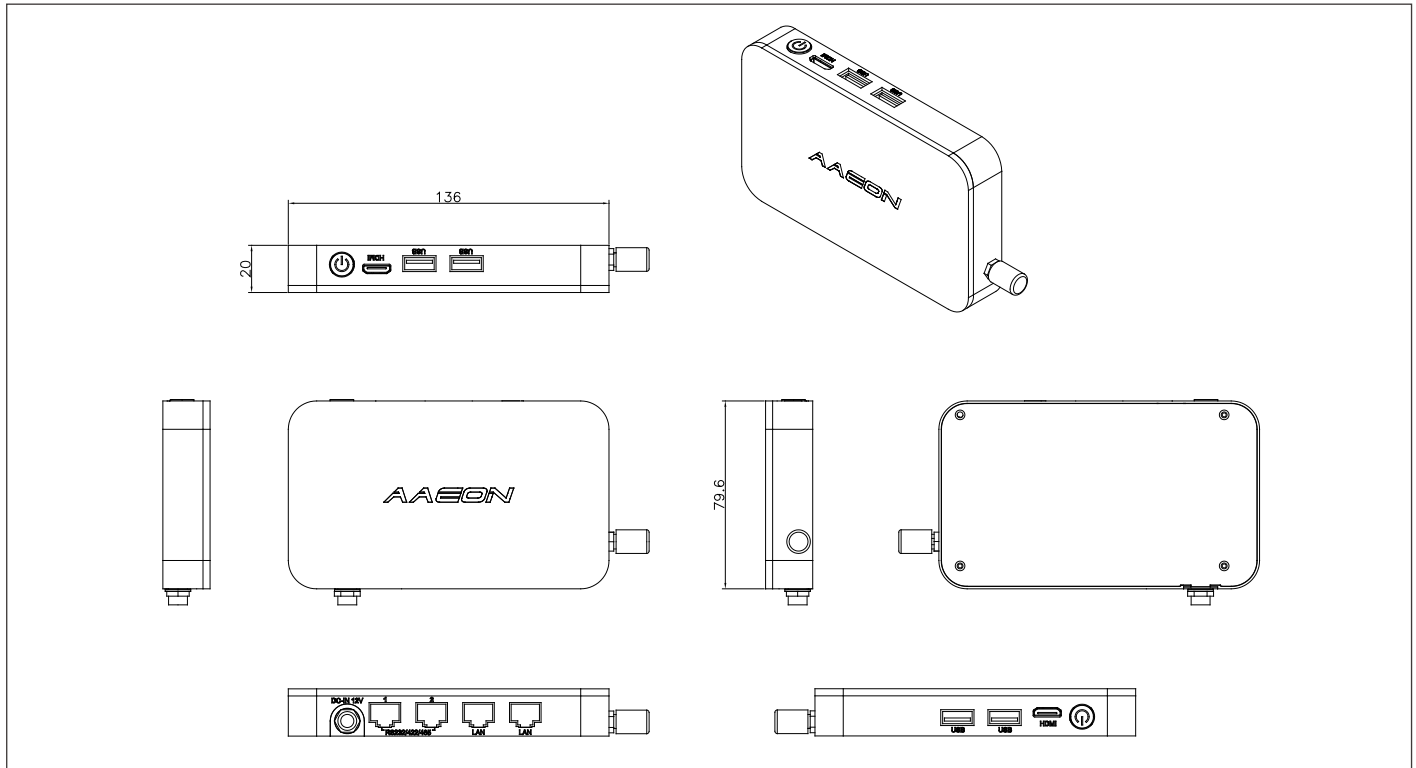

Ordering Information

Part Number	CPU	RAM	LAN	USB 2.0	CAN (2-pins)	RS-232/422/485	Storage	Display	Expansion	Mounting	Power	Operation Temp.
BOXER-6402-A1-1110	Intel® Atom™ N2600	Up to 2 GB	2	2	1	2	mSATA bay x 1	Mini HDMI	WiFi b/g/n (optional)	Din Rail/VESA 75	12V DC in	0°C ~ 50°C (with airflow)
BOXER-6402-A2-1110	Intel® Atom™ N2600	Up to 2 GB	2	2	1	2	mSATA bay x 1	Mini HDMI	WiFi b/g/n (built-in)	Din Rail/VESA 75	12V DC in	0°C ~ 50°C (with airflow)
BOXER-6402-A3-1010	Intel® Atom™ N2600	Up to 2 GB	2	2	0	2	mSATA bay x 1	Mini HDMI	WiFi b/g/n (optional)	Din Rail/VESA 75	12V DC in	0°C ~ 50°C (with airflow)
BOXER-6402-A4-1010	Intel® Atom™ N2600	Up to 2 GB	2	2	0	2	mSATA bay x 1	Mini HDMI	WiFi b/g/n (built-in)	Din Rail/VESA 75	12V DC in	0°C ~ 50°C (with airflow)

Packing List

- RJ-45 to COM cable x 2
- Mini HDMI to HDMI Cable x 1
- Power Adapter x 1
- Product CD
- BOXER-6402

Optional Accessories

- **1702031802**
Power Cord (US type)
- **1702031803**
Power Cord (European Type)
- **170203180E**
Power Cord (Japanese Type)
- **M276401000**
Anti-Heat Kit
- **1700090156**
RJ-45 to COM Cable
- **1700190500**
Mini HDMI to HDMI Cable
- **125530060A**
Power Adapter
- **9741640101**
Din Rail Mount Kit
- **9741640100**
VESA Mount Kit