



Intelli TWL01 Edge

Intelli TWL01 Edge with Intel® Processor N-series SoC (formerly Twin Lake)

Front View

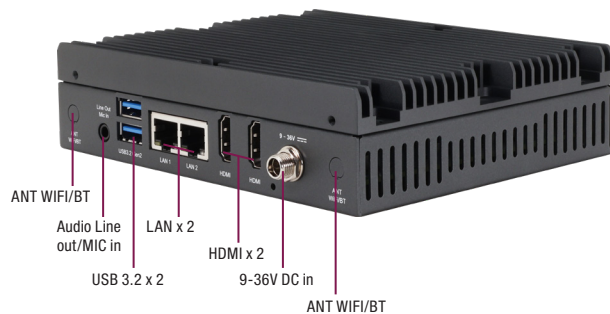

Rear View

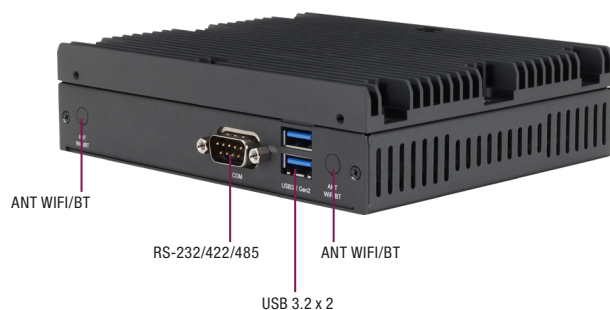

Features

- Intel® Processor N-series SoC (formerly Twin Lake)
- Onboard LPDDR5 Memory up to 16GB
- 64GB Onboard eMMC Storage (Optional: up to 128GB)
- Gb Ethernet RJ-45 x 2
- USB 3.2 Type A x 4
- HDMI 2.0b x 2
- RS232/422/485 x 1
- M.2 2230 E-Key x 1
- M.2 2280 M-Key x 1
- TPM 2.0
- 9V~36V DC-in




Specifications

System	
CPU	Intel® Core™ 3 Processor N355 Intel® Processor N250 Intel® Processor N150 Intel® Processor N97
Memory	Up to 16GB LPDDR5
Graphics	Intel® UHD Graphics for 12th Gen Intel® Processors
Storage	64GB eMMC (optional: up to 128GB)
Ethernet	Gb Ethernet RJ-45 x 2
WIFI/BT	Optional with M.2 2230 E-key x 1
Expansion Slot	M.2 2230 E-Key x 1 (PCIe x1, USB2.0 x1) M.2 2280 M-key x 1 (PCIe x2)
Security	TPM 2.0 (fTPM, Onboard TPM IC optional by BOM)
OS Support	Windows® 11 LTSC Ubuntu: 24.04 LTS Yocto: 5.1
I/O Placements	
USB	USB 3.2 Gen 2 x 4 (Type-A)
Display Port	HDMI 2.0b x 2
Ethernet	Gb Ethernet RJ-45 x 2
COM	RS-232/422/485 x 1
Audio	Line out x 1 Mic in x 1
GPIO	10-pin GPIO
Power Supply	
Power requirement	9V~36V DC-in, 5A
Power supply type	AT/ATX
Power Consumption (Typical)	15W~37W
Mechanical	
Mounting	DIN Rail, Wallmount, VESA mount
Dimensions (WxHxD)	5.98" x 4.9" x 1.54" (152mm x 124mm x 39mm)
Net Weight	1.4 lb (0.64 kg)
Gross Weight	2.1 lb (0.96 kg)
Environment	
Operating Temperature	32°F ~ 122°F (0°C ~ 50°C)/0.5 airflow
Operating Humidity	0% ~ 90% relative humidity, non-condensing
Storage Temperature	-4°F ~ 158°F (-20°C ~ 70°C)
MTBF (Hours)	1,401,514
Certification	CE/FCC Class A, RoHS Compliant, REACH



Dimension

Unit: mm

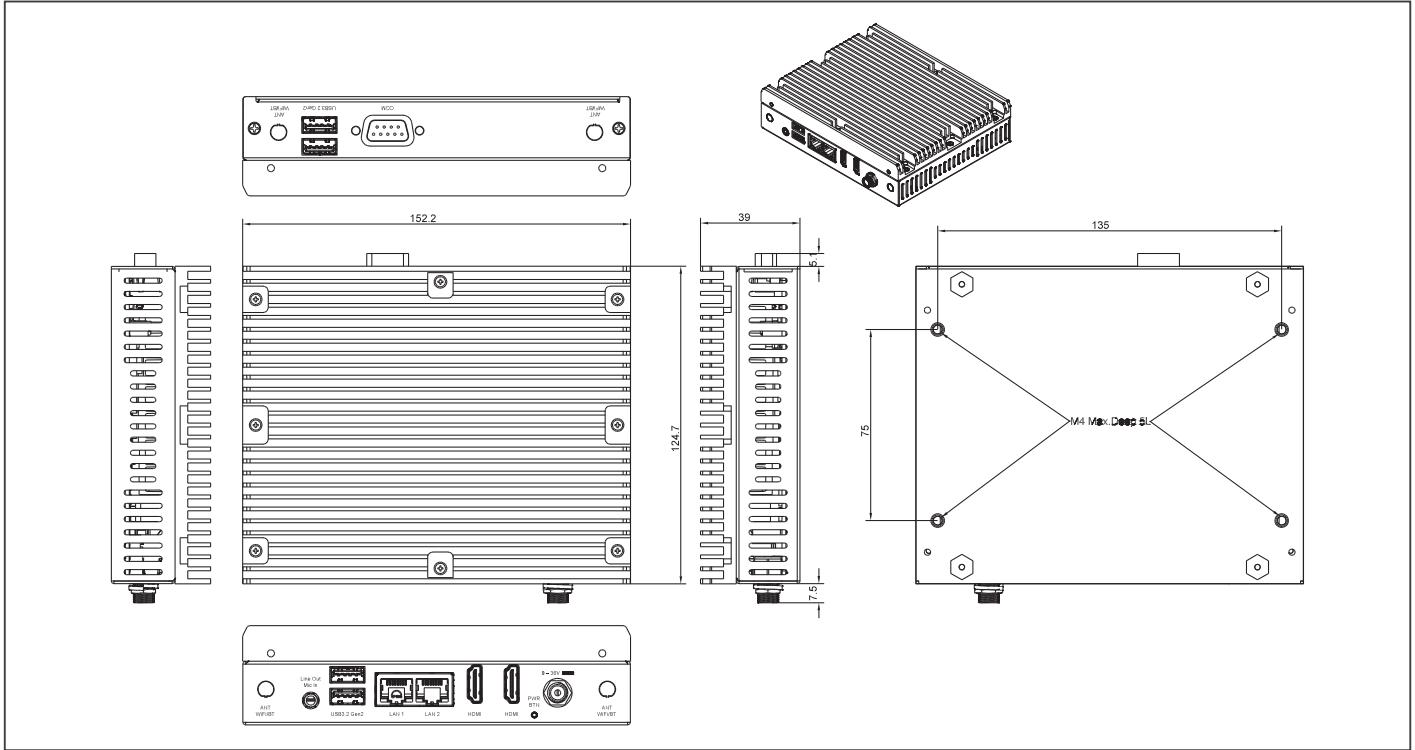

Ordering Information

Part number	CPU	Memory	Storage
ITL-TWL01-SYS-A10-N150-0864	Intel® Processor N150	8GB	64GB
ITL-TWL01-SYS-A10-N97-0864	Intel® Processor N97	8GB	64GB

Optional Accessories

Part Number	Description
1255X00032	(TF)AC/DC Adapter.Input AC.100~240V.Output DC.12V.MAX 72W.6.0A.180D.W/ LOCK.EDAC. EA10681U(120)
170X000799	(TF)Power Cord. 3P. 125V. 10A. 180D. USA. 1. 8M. I-SHENG. SP305B/IS-14N SVT 18/3 60C CT-12 Black (for USA)
170X001024	(TF)Power Cord.3P.250V.10A.VDE.1.8M.I-SHENG.SP23/IS-14N H05VV-F 3G 0.75 CT-12.Black (for EU)
170X001231	(TF)Power Cord.3P.250V.10A.180D.1800mm.J SHENG ELECTRIC.SP-506A+IS-14N
170X000806	(TF)Power Cord. 3P. 125V. 7A. 1. 8M. I-SHENG. U4NCB3T6B1218002. SP305B/IS-14N VCTF. Black. BSMI
170X000803	(TF)Power Cord.3P.125V/7A.PSE Certificate.1.8M.I-SHENG.U4NCB3P6C1218002.SP305B/IS-14N VCTF 0.75/3 Black 1.8M
170X000810	(TF)Power Cord.3P.250V.16A.Korea.1.8M.I-SHENG.SP23/IS-14N H05VV-F 3G 0.75 CT-12 Black
170X000805	(TF)Power Cord.3P.250V.10A.SWISS.1.8M.I-SHENG.SP-027C/IS-14N H05VV-F 3G 0.75mm CT-12 Black
9651210000	Wireless LAN Kit M.2 2230 802.11ax/ac/a/b/g/n + BT5.2,2.4G/5G/6G,with 2 sets of cable & antenna (Intel AX210)
9651885200	Wireless LAN Kit M.2 2230 802.11ax/ac/a/b/g/n + BT5.2,2T2R,with 2 sets of cable & antenna (Enli,ENL-8852CE)
UPS-VESAKIT-A10-0000	VESA KIT for UPS-GWS/UPS-EDGE-EHL/UPS-EDGE-ASL/UPS-EDGE-TWL

Packing List

- Intelli TWL01 Edge