

# NIM-S26C

Intel® XL710 PCI-Express 10G SFP+ 4 Ports Module



## Features

- PCI-Express Host Interfaces
- 10G SFP+ Fiber Port x 4



## Network Appliance Options

- FWS-7360
- FWS-7830
- FWS-7831
- FWS-7821
- FWS-7820
- FWS-7840
- FWS-8600

## Specifications


Main Specification	
Form Factor	10G Fiber Module
Main Chipset	Intel® XL710 Ethernet Controller x 1
Bypass	—
Host Interface	PCI-Express [x8]
LAN Port	SFP+ 10 GbE Connector x 4
Indicator	LED x 4 for Active/Link
Qualification	CE/FCC Class A
Operation Temp.	32°F ~ 104°F (0°C ~ 40°C)
Dimension	5.71" x 3.03" (145mm x 77mm)

## Ordering Information

- **NIM-S26C-A10-T40-0002**  
LAN Module, Intel® XL710, 10 GbE SFP+ x 4, FWS-7820/7821/7830/7831/7360/8600, Rev. A.1.0

# NIM-S26D

Intel® Ethernet Controller XL710-BM1 (Fortville) Quad Port SFP+ 10 GbE LAN Module

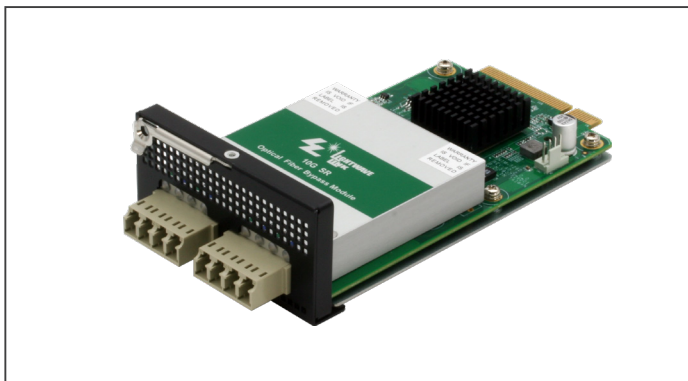

## Features

- PCI-Express Gen3 [x8] Host Interfaces
- Intel® Ethernet Controller XL710-BM1
- 10G SFP+ Fiber ports x 4+SR
- Two pairs Bypass function



## Network Appliance Options

- FWS-7820
- FWS-7821
- FWS-7831
- FWS-7830
- FWS-7840
- FWS-8600

## Ordering Information

- **NIM-S26D-A10-T42-0002**  
LAN Module, Intel XL710.4 x 10GbE SFP+ 2 x BPSR, FWS-7820/7821/7830/8600

## Specifications

Main Specification	
Form Factor	10GbE Fiber LAN Module
Main Chipset	Intel® XL710-BM1 Ethernet Controller x 1
Bypass	2
Host Interface	PCI-Express [x8]
LAN Port	SFP+ 10 GbE Connector x 4 SR
Indicator	LED x 4 for Active/Link
Qualification	CE/FCC Class A
Operation Temp.	32°F ~ 104°F (0°C ~ 40°C)
Dimension	5.71" x 3.03" (145mm x 77mm)