



2U Rackmount, Hot-Swappable HDD Network Video Recorder System with Intel® Core™ i3/i5/i7 Processor

Front View

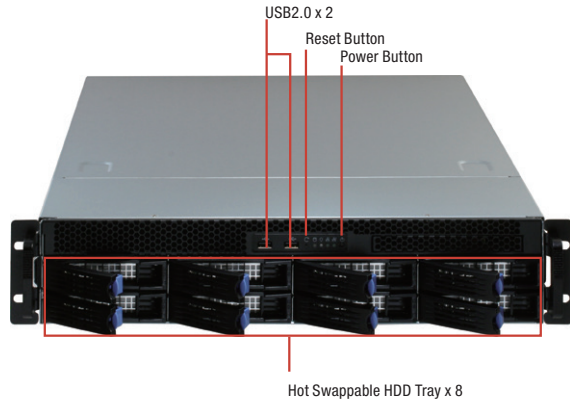

Rear View

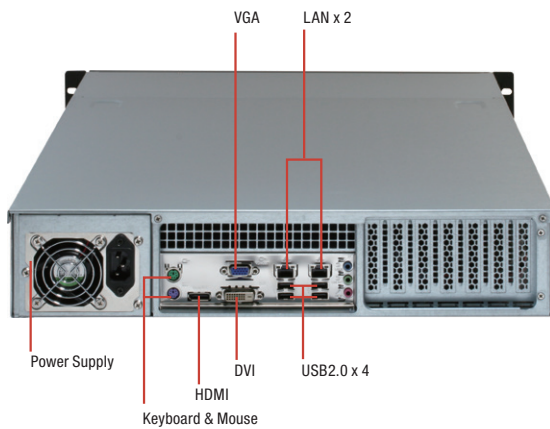

Features

- Socket 1155 with 2nd Generation Intel® Core™ i3/i5/i7 Processor
- Intel® Q67 Chipset
- 4 GB or 8 GB DDR3 1333/1600 MHz, Non-ECC, Un-buffered DIMM Memory, Up to 32 GB
- 10/100/1000Base-TX x 2
- PCI-E to SATA 2-port Conversion Card
- 3.5" SATA HDD Hot Swappable Tray x 8 + 2.5" Internal HDD Bracket x 1
- Onboard COM x 2
- USB 2.0 x 2 (Front), USB 2.0 x 4 (Rear)
- VGA x 1, DVI-D x 1, DisplayPort x 1
- Supports RAID 0/1/5/10
- Audio Line-out, Line-in, Mic-in
- Windows® 7 Embedded Standard (Optional)
- 500W PSU




Specifications

System	
Form Factor	2U Rackmount
Processor	Intel® 2nd Gen. Core™ i3/i5/i7 Processor
Chipset	Intel® Q67
Main Memory	Up to 32GB, DDR3, Non-ECC 1333MHz, 240-pin DIMM
Display	DVI-D x 1, VGA x 1, DP x 1
Ethernet	10/100/1000Base-TX x 2
PoE Ethernet Port	—
RAID support	0/1/5/10
Expansion Slot	PCI-E [x16] x 1, PCI x 2
GPS	—
Front I/O Panel	Power Button x 1 Reset Button x 1 Power & HDD LED USB 2.0 x 2 (only for RM-S model)
Rear I/O Panel	VGA x 1 DVI-D x 1 DP x 1 LAN (RJ-45) port x 2 USB 2.0 x 4 Audio jack x 3 PS/2 x 1 (Keyboard + Mouse)
Environmental	
Operating Temperature	32°F ~ 104°F (0°C ~ 40°C)
Storage Temperature	-4°F ~ 140°F (-20°C ~ 60°C)
Storage Humidity	10%~80% @40°C, non-condensing
Vibration/Shock	IEC68-2-64
Certification	CE/FCC Class A, CCC
Power Requirement	
Power Supply	1U 500W PSU, 80 plus Gold
Mechanical	
Removable HDD Tray	3.5" x 8
Internal System HDD Bay	2.5" HDD x 1 (SATA DOM optional)
Dimension	21" x 17.2" x 3.46" (533mm x 437mm x 88mm)
Gross Weight	28.7 lb (13 kg)
Note	—

Dimension

Unit: mm

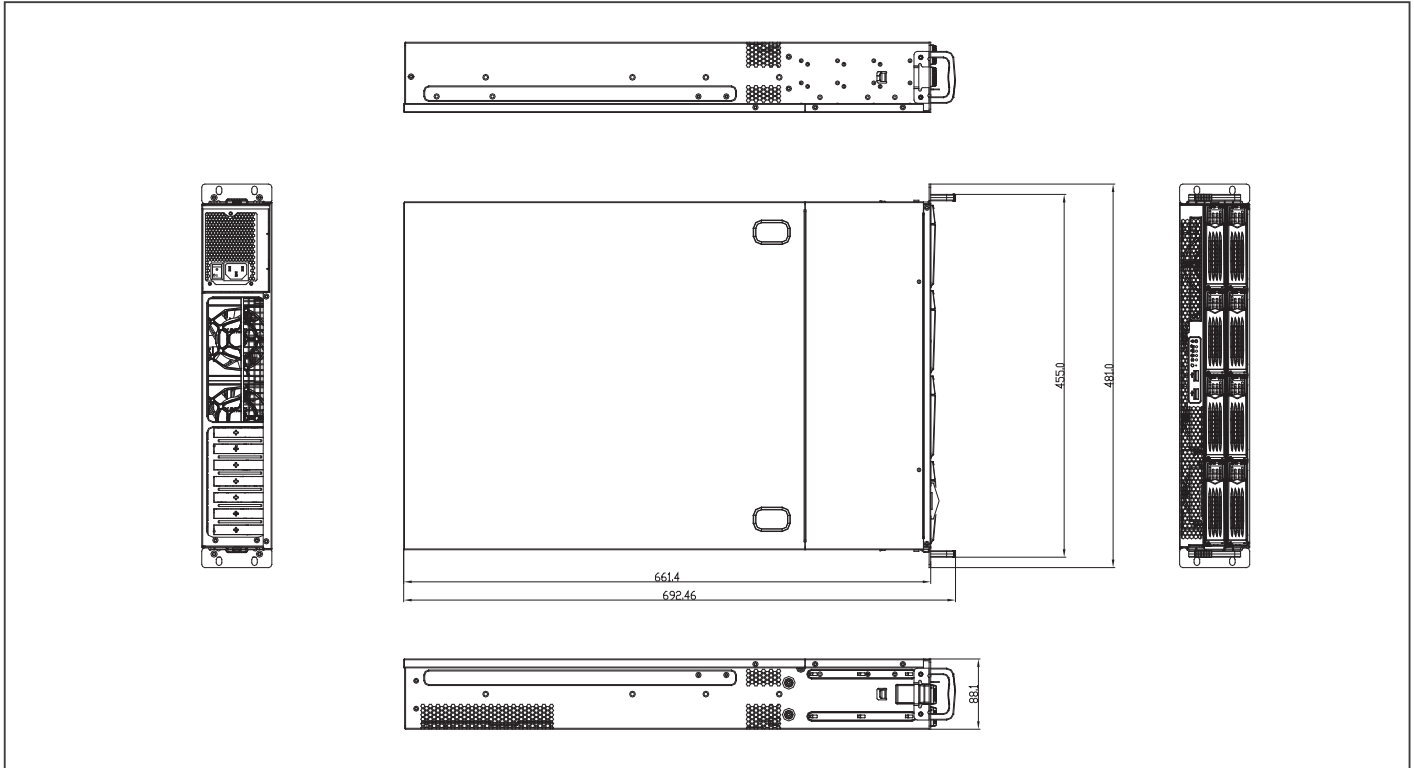

Ordering Information

Part Number	Chipset	RAM	Cooler	Storage	Display	LAN	USB	KB/MS	Audio	Expansion Slot	Mounting	Power
NVR-Q67S-A10-RM	Intel®Q67	240-pin DIMM	Fan	3.5" SATA Hot Swappable x 8 + 2.5" HDD bay x 1	VGA + DVI-D + DP	GbE x 2	USB 2.0 x 6	1	Mic-In, Line-In, Line-Out	PCI-E [x16] x 1, PCI x 2	2U Rackmount	500W ATX

Packing List

- CD-ROM with SATA Card Driver
- Screws for HDD
- NVR-Q67S

Optional Accessories

- **1702031802**
(TF) Power Cord, 3P-125V 10A 180D, 1.8M, USA & Taiwan
- **1702031803**
(TF) Power Cord, 3P-250V 10A 180D, 1.8M, Europe
- **170203180B**
(TF) Power Cord, 3P (M), 3P (F), 1.8m, 250V, 10A, China
- **1709070800**
(TF) SATA Cable, 7P Pitch 1, 27mm, 80cm, W/Lock
- **978325000A**
(TF) 2.5" HDD, 250 GB, SATA, 5400rpm, WD, WD2500BPVT
- **9783320003**
(TF) 3.5" HDD, 320 GB, SATA-3, 7200rpm, WD, WD3200AAKX
- **14D6B04G22**
(TF) 4 GB, DDR3-1333, 240-Pin, ELPIDA (256M x 8), DSL
- **968D3008G3**
(TF) 8 GB, DDR3 1333, (Non ECC), 240-pin (512M x 8), DSL
- **968C016G1S**
(TF) SATA, DOM, 16 GB, Mach Xtreme
- **9789Q67S01**
(TF) Rail Mounting Bracket, For NVR-Q67S-A10-RM