


21.5" OMNI Modular Touch/ LCD Kit



Features

- 21.5" (1920 x 1080) OMNI Modular Touch/ LCD Kit
- Supports Projected Capacitive Multi Touch or Resistive Touch Screen
- IP65 Compliant Aluminum Front Bezel

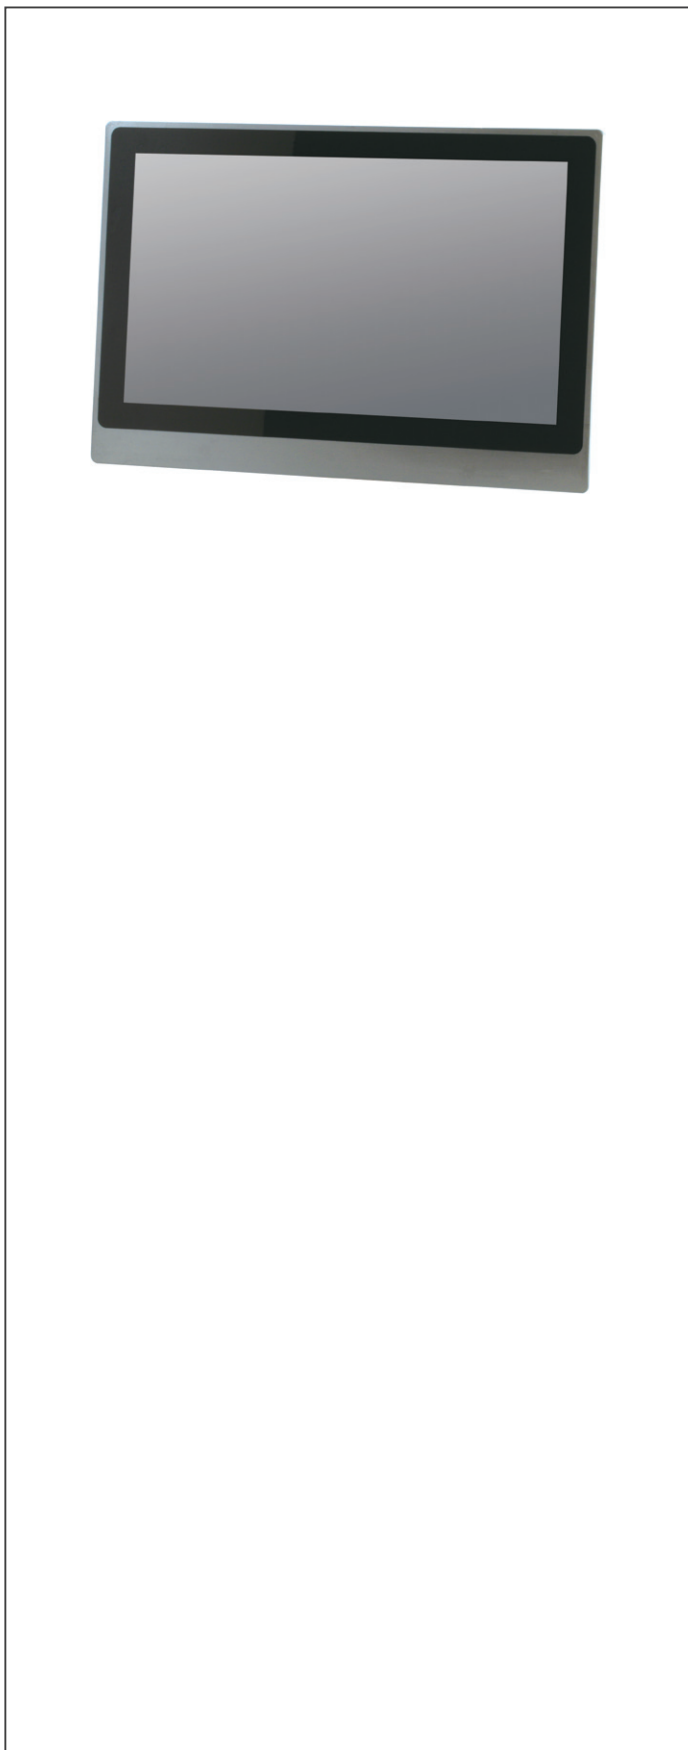


Specifications

| Mechanical | |
|-------------------------|---|
| Construction | Aluminum Front Bezel |
| Mounting | — |
| Dimension | 21.61" x 14.65" x 0.87" (549mm x 372mm x 22mm) |
| Carton Dimension | 26.38" x 7.87" x 20.67" (670mm x 200mm x 525mm) |
| Gross Weight | 11 lb (5 kg) |
| Environmental | |
| Operating Temperature | 14°F ~ 131°F (-10°C ~ 55°C) with 0.5 m/s airflow |
| Storage Temperature | -4°F ~ 158°F (-20°C ~ 70°C) |
| Storage Humidity | 90% @40°C; non-condensing |
| Vibration | 1 Grms/ 5~ 500Hz/ operation – with HDD |
| Shock | 15G peak acceleration (11 msec. duration) – with HDD |
| EMC | CE/FCC Class A |
| Power Supply | |
| DC input | — |
| LCD | |
| Display Type | 21.5" TFT-LCD, LED |
| Max Resolution | 1920 x 1080 |
| Max. Colors | 16.7M colors |
| Luminance | 250 cd/m ² |
| Viewing Angle | 178°(H), 178°(V) |
| Back Light | LED |
| Back Light MTBF (hours) | 50,000 |
| Touch Screen | |
| Type | Full Flat Resistive Touch Screen or Projective Capacitive Touch |
| Light Transmission | 90% |

OMNI-221D Panel Kit

Dimension

Unit: mm

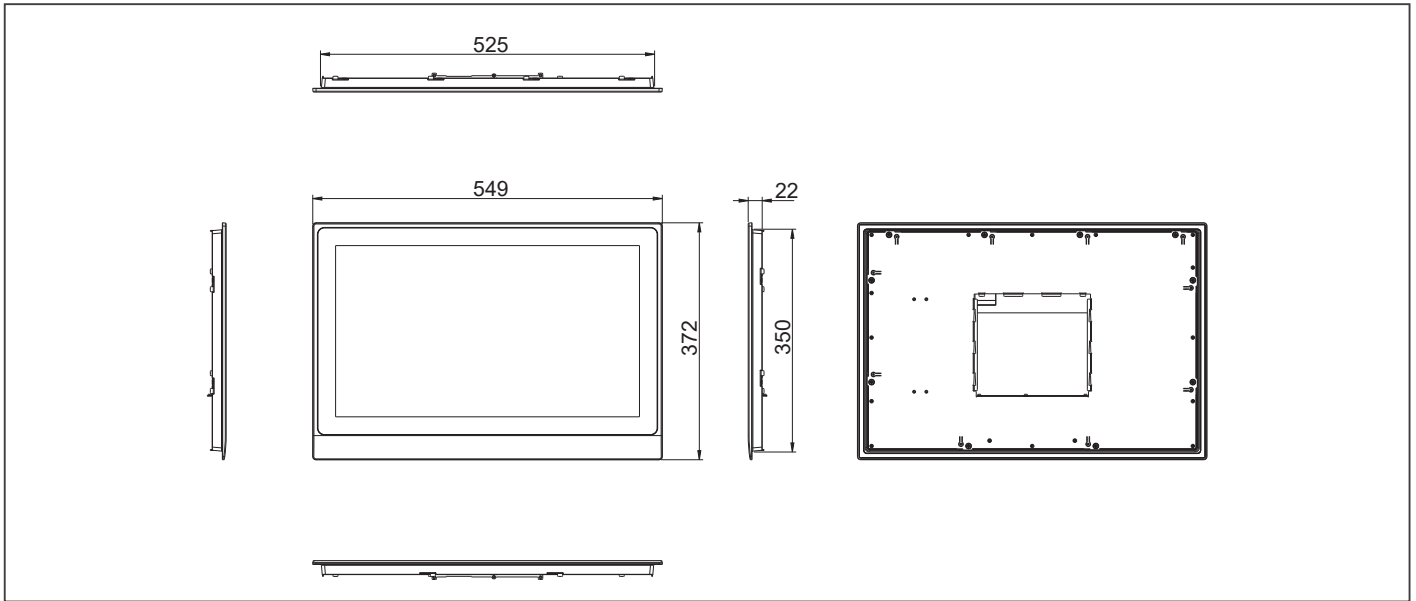

Ordering Information

| Part Number | Display Type | Max Resolution | Luminance | View Angle | Backlight MTBF (Hours) | Temp. | Touch | Other |
|--------------------------|---------------|----------------|-----------------------|----------------|------------------------|--------------|----------------------------------|--------------------------|
| OMNI-221DHTT-KIT-A1-1011 | 21.5" TFT-LCD | 1920 x 1080 | 250 cd/m ² | 178(H), 178(V) | 50,000 | -10°C ~ 55°C | Full Flat Resistive Touch Screen | Support OMNI CPU BOX kit |
| OMNI-221DHTT-KIT-A2-1011 | 21.5" TFT-LCD | 1920 x 1080 | 250 cd/m ² | 178(H), 178(V) | 50,000 | -10°C ~ 55°C | Projective Capacitive Touch | Support OMNI CPU BOX kit |