


OMNI-3120PD

12.1" OMNI Modular Open Frame Touch/ LCD Panel Kit

OMNI-3120PD-HTT-KIT-A1-1010



OMNI-3120PD-HTT-KIT-A2/A3-1010

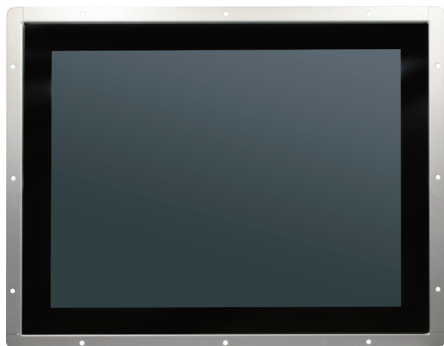

Features

- 12.1" (1024 x 768) OMNI Modular Open Frame Touch/ LCD Kit
- Supports Projected Capacitive Multi Touch or Full Flat Resistive Touch Screen or 5-wire Resistive Touch Screen




Specifications

Mechanical	
Construction	Open Frame LCD Kit
Mounting	Panel Mount
Dimension	13.2" x 10.8" x 1.04" (335.2mm x 274.2mm x 26.5mm)
Carton Dimension	20.87" x 17.52" x 7.87" (530mm x 445mm x 200mm)
Gross Weight	4.4 lb (2 kg)
Environmental	
Operating Temperature	14°F ~ 131°F (-10°C ~ 55°C) with 0.5 m/s airflow
Storage Temperature	-4°F ~ 158°F (-20°C ~ 70°C)
Storage Humidity	90% @40°C; non-condensing
Vibration	1 Grms/ 5~ 500Hz/ operation – with HDD
Shock	15G peak acceleration (11 msec. duration) – with HDD
EMC	CE/FCC Class A
Power Supply	
DC input	—
LCD	
Display Type	12.1" TFT-LCD, LED
Max Resolution	1024 x 768
Max. Colors	16.2M colors
Luminance	500 cd/m ²
Viewing Angle	160° (H), 160° (V)
Back Light	LED
Back Light MTBF (hours)	50,000
Touch Screen	
Type	Projected Capacitive Multi Touch or Full Flat Resistive Touch Screen or 5-wire Resistive Touch Screen
Light Transmission	90%
Others	1. Connect with OMNI-Box Kit 2. Connect with LVDS/USB Type Touch

Dimension

Unit: mm

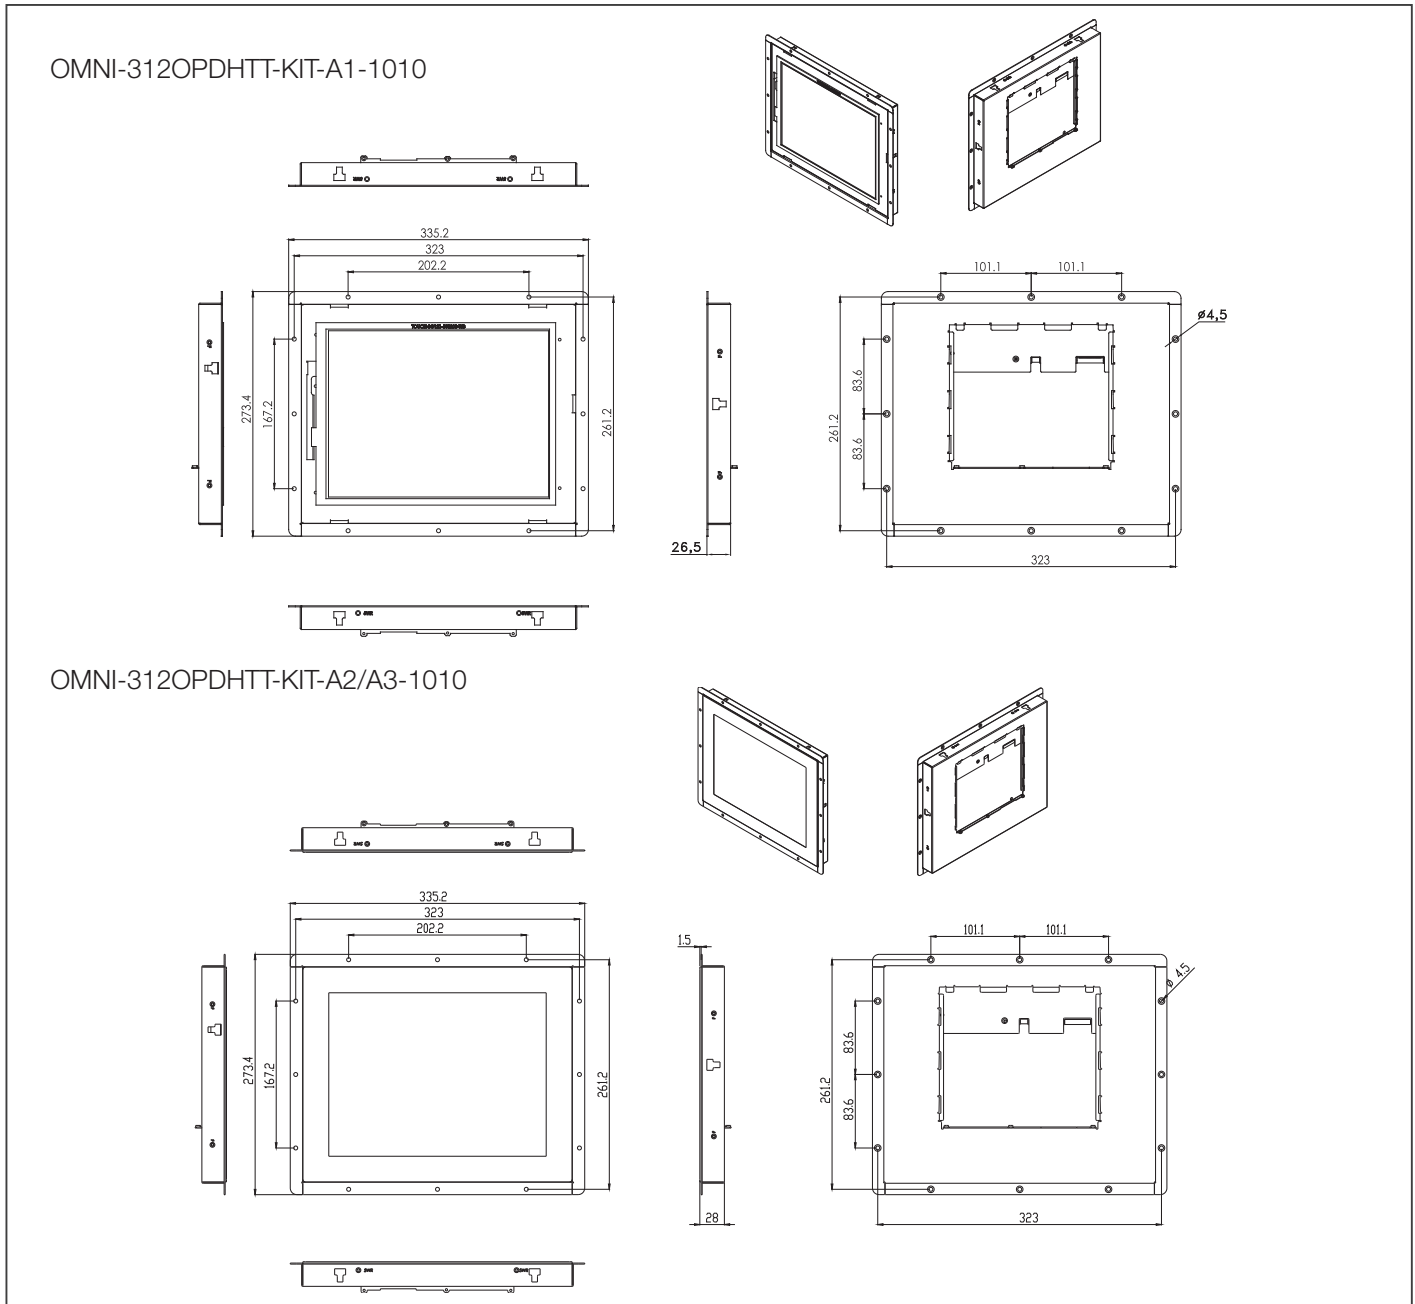

Ordering Information

Part Number	Display Type	Max Resolution	Luminance	View Angle	Backlight MTBF (Hours)	Temp.	Touch	Other
OMNI-3120PDHTT-KIT-A1-1010	12.1" TFT-LCD	1024 x 768	500 cd/m ²	160°(H), 160°(V)	50,000	-10°C ~ 55°C	5 wire Resistive Touch	Support OMNI CPU BOX kit
OMNI-3120PDHTT-KIT-A2-1010	12.1" TFT-LCD	1024 x 768	500 cd/m ²	160°(H), 160°(V)	50,000	-10°C ~ 55°C	Full flat Resistive Touch	Support OMNI CPU BOX kit
OMNI-3120PDHTT-KIT-A3-1010	12.1" TFT-LCD	1024 x 768	500 cd/m ²	160°(H), 160°(V)	50,000	-10°C ~ 55°C	Projectlitive Capacitive Touch	Support OMNI CPU BOX kit