


PCIe [x4] Expansion Card with 4-Port 802.3at PoE for Machine Vision



Features

- PCIe [x4] Interfacce
- 802.3at PoE Port x 4
- Intel® i211AT LAN Chip

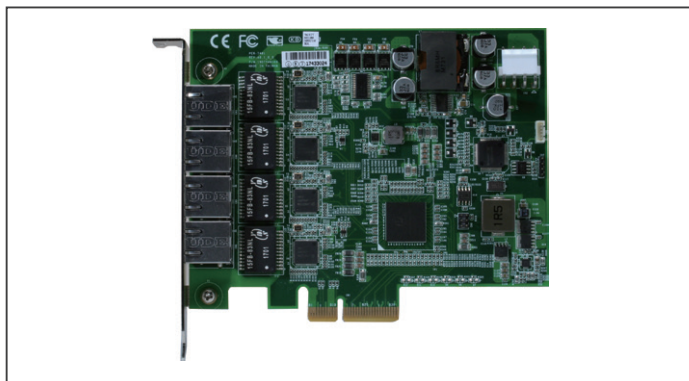

Ordering Information

- PER-T481-A10-1
802.3at 4 Ports PoE Module, PCIe [x4] Expansion Card, Rev. A1.0


Specifications

System	
Form Factor	PCI-Express [x4]
Chipset	Intel® i211AT GbE LAN x 4
Interface	802.3at RJ-45 x 4 4-pin 12~24V DC-in
OS Support	Windows® 10, Windows® 8.1 (32/64-bit), Windows® 7 (32/64-bit)
Power Supply	
Power Requirement	Max. 140W

Mechanical	
Dimensions (W x H x D)	4.33" x 5.35" x 0.79" (110mm x 136mm x 20mm)
Environmental	
Operating Temperature	-4°F ~ 122°F (-20°C ~ 50°C) (according to IEC68-2-14 with 0.5 m/s AirFlow; with industrial devices)
Storage Temperature	-49°F ~ 176°F (-45°C ~ 80°C)
Storage Humidity	5 ~ 95% @ 40°C, non-condensing

PER-T481-4LAN

PCIe [x4] Expansion Card with 4-Port Intel® GbE LAN for Machine Vision

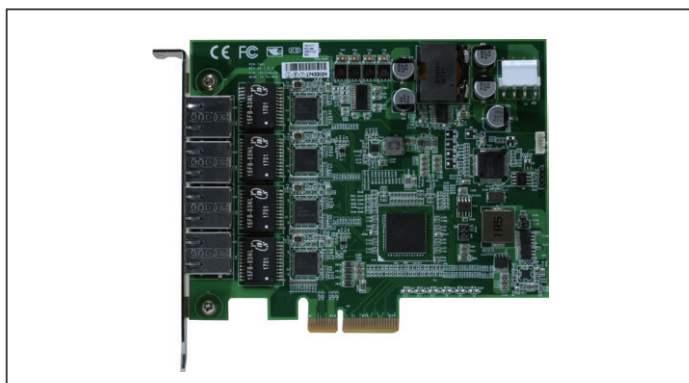

Features

- PCIe [x4] Interfacce
- Intel® i211AT GbE LAN x 4



Ordering Information

- PER-T481-A20-1
4 Ports Intel® i211AT GbE LAN Module, PCIe [x4] Expansion Card, Rev. A1.0

Specifications

System	
Form Factor	PCI-Express [x4]
Chipset	Intel® i211AT GbE LAN x 4
Interface	—
OS Support	Windows® 10, Windows® 8.1 (32/64-bit), Windows® 7 (32/64-bit)
Power Supply	
Power Requirement	Max. 10W
Mechanical	
Dimensions (W x H x D)	4.33" x 5.35" x 0.79" (110mm x 136mm x 20mm)

Environmental	
Operating Temperature	-4°F ~ 122°F (-20°C ~ 50°C) (according to IEC68-2-14 with 0.5 m/s AirFlow; with industrial devices)
Storage Temperature	-49°F ~ 176°F (-45°C ~ 80°C)
Storage Humidity	5 ~ 95% @ 40°C, non-condensing