



2-Port Intel® GbE LAN PCI-E [x4] Frame Grabber Card

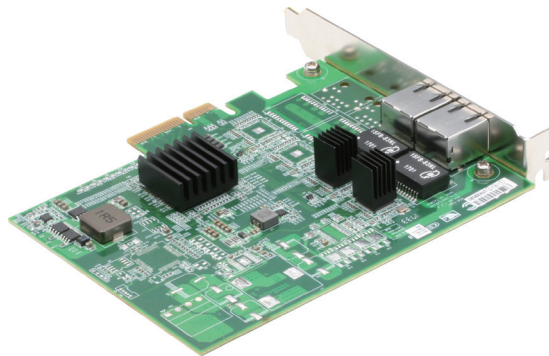

Features

- PCI-Express® [x4] Gen. 2 Compliant
- 2 Independent Gigabit Ethernet Controller, Intel® i211AT
- Support Bandwidth 1 Gb/s for Each Port
- Support for Link Aggregation/Jumbo Frames (9 KByte)

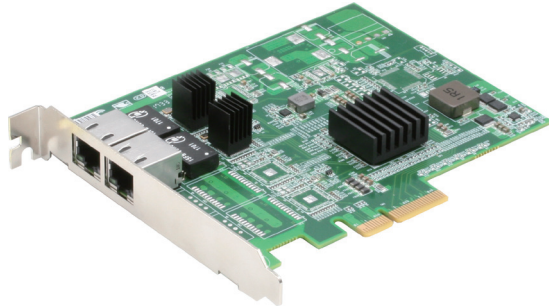

Specifications

System	
Bus Interface	PCI-Express® [x4], Gen 3 PCI-Express® Specification Revision 3.0 at 5GT/s
Ethernet	Intel® i211AT Ethernet Controller x 2 Bandwidth 1Gb/s for each port Fully compliant with IEEE 802.3 and IEEE 802.3u Support IEEE 1588 precision time synchronization
OS Support	Windows® 10, Windows® 8.1 (32/64-bit), Windows® 7(32/64-bit), Linux
Power Supply	
Power Requirement	Max. 10W
Mechanical	
Dimensions (W x D)	110mm(W) x 136mm(D)
Environmental	
Operating Temperature	-4°F ~ 140°F (-20°C ~ 60°C) (according to IEC68-2-14 with 0.5 m/s AirFlow; with industrial devices)
Storage Temperature	-49°F ~ 185°F (-45°C ~ 80°C)
Storage Humidity	5 ~ 95% @ 40°C, non-condensing

Ordering Information

- **PER-T481-A20-00**
2-Port Intel® GbE LAN PCI-E [x4] Frame Grabber Card