

RDS-1020

Rugged Docking Station for RTC-1020



Features

- Suitable for RTC-1020
- Front-facing I/O: USB 2.0 x 2
- Downward-facing I/O for Easy Cable Management: USB 3.2 Gen 1 x 2, RS-232 x 1, GbE x 1, DC-in Phoenix Connector x 1
- Wide Voltage Input: 9VDC ~ 36VDC
- Power Adaptor: AC Power Adaptor (Default)
- Anti-Theft Lock with Key & VESA Mount Support (75x75)




Specifications

System	
I/O	Front-facing I/Os: USB 2.0 x 2 Downward-facing I/Os: USB 3.2 Gen 1 x 2 RS-232 x 1 RJ45 GbE x 1
DC Input	Phoenix connector: DINKLE ECH381H-03P Wide Voltage Input: DC 9V to 36V Mating connector: DINKLE EC381V-03P
LED Indicator	Orange: DC in w/o Tablet Blue: DC in w/ Tablet
Others	Anti-theft lock with key & VESA mount support (75x75)
Mechanical	
Color	Black
Construction	Metal
Dimension (W x H x D)	3.18" x 10.12" x 2.96" (125mm x 257mm x 75mm)
Gross Weight	2.2 lb. (1Kg)
Environmental	
Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)
Storage Temperature	-10°C ~ 60°C (14°F ~ 140°F)
ESD	Air charge: +/- 8KV Contact charge: +/- 4KV
Certifications and Standards	CE / FCC Class B
Power Supply	
AC Adapter	AC 100 ~ 240 V, Output: 19W/ 6.32A/ 120W DC connector: 3P phoenix.3.81mm
DC Adaptor	N/A

Note: All specifications are subject to change without notice.

Dimension

Unit: mm

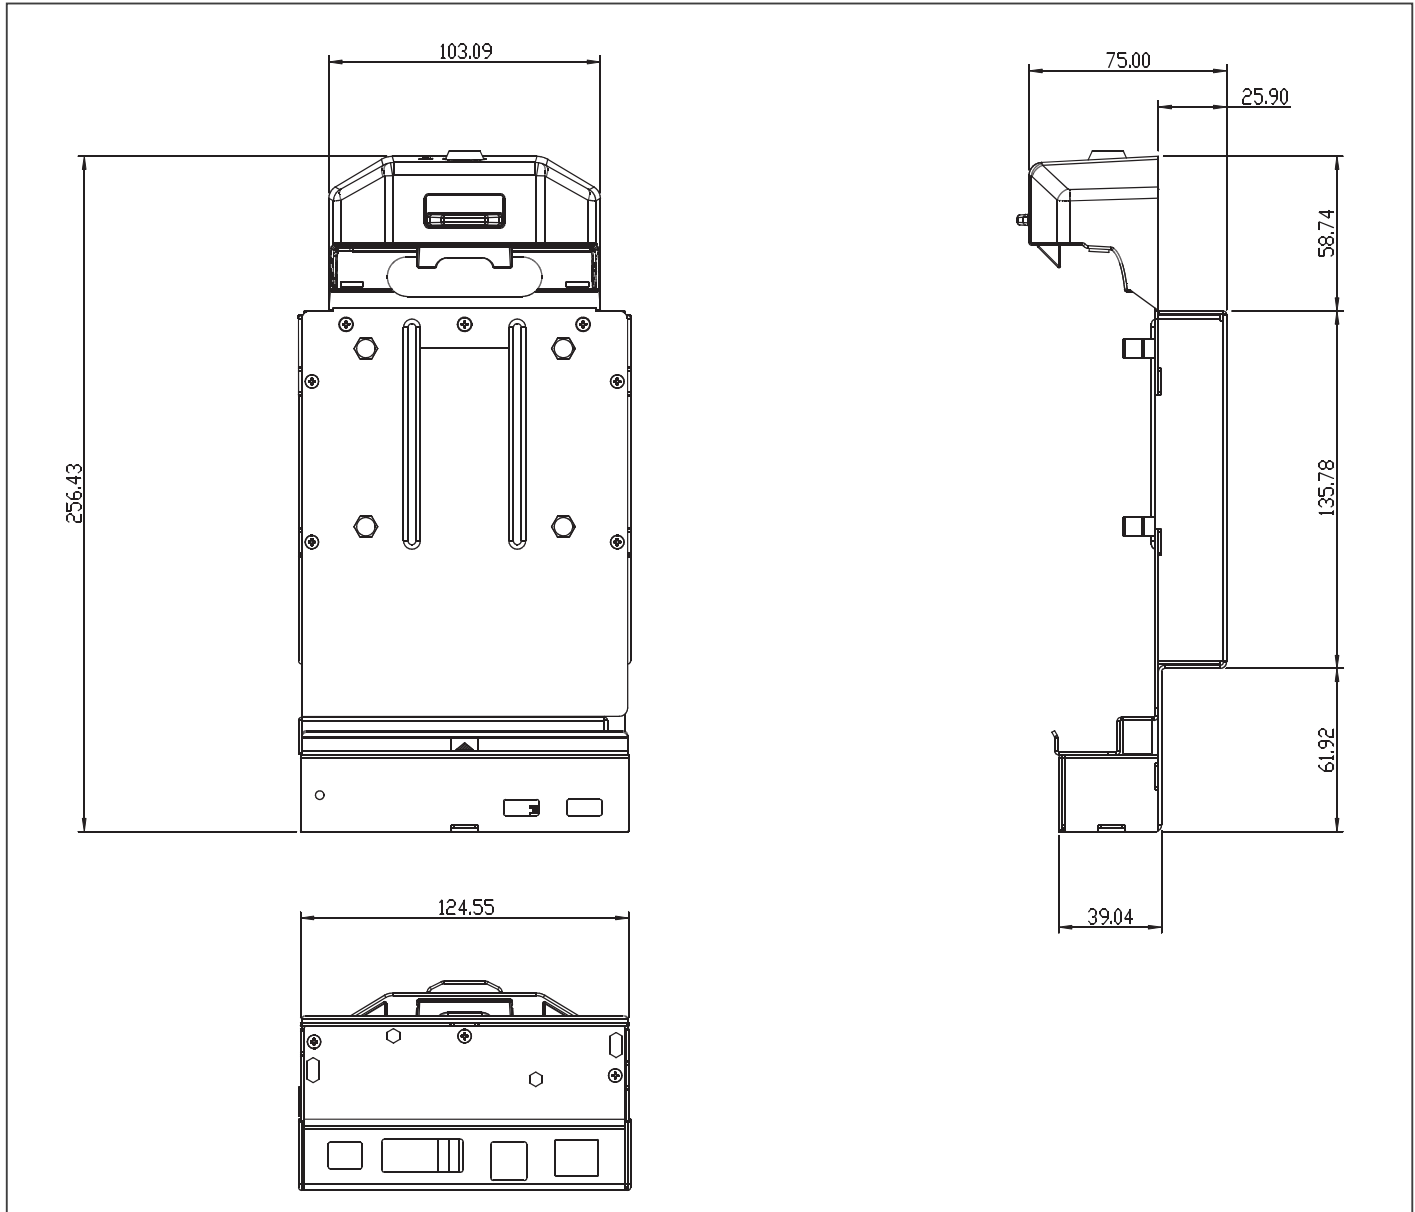

Ordering Information

- RDS-1020-000**
 Docking Station.USBx4.RS-232.RJ45.DC Connector.9-36V Input
- RDS-1020-001**
 Docking Station.USBx4.RS-232.RJ45.DC Connector.9-36V Input.W/ Stand

Packing List

- RDS-1020**
- 1255X00079**
AC-To-DC Power Adaptor, 19V, 120W

*Power cord must be purchased separately.

Optional Accessories

- 170203J000**
DC Input Cable, 2 Meters, One Side With Mating Connector: DINKLE EC381V-03P, One Side With Flying Wires