


# RT-620R

2U Industrial Server Chassis, Industrial Main Board Support

Front View

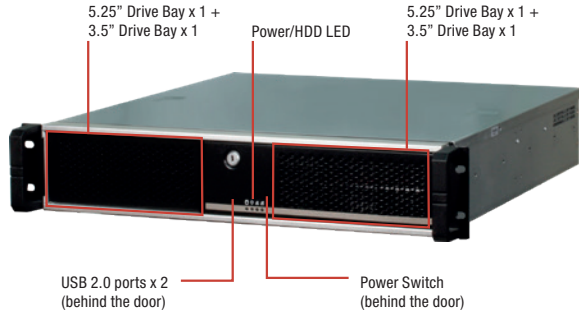

Rear View



## Features


- Depth 18" of chassis for space-sensitive applications
- Optimized fan placement for better cooling performance
- Cushion on drive cages to depress HDD & ODD vibration
- Removable drive cages for easy installation
- Supports PS/2 PSU

## Specifications

System	
M/B Form Factor	Micro ATX (9.6" x 9.6")
Dimension (D x W x H)	457.2 x 430 x 88 (mm) , 18" x 16.9" x 3.5"
Drive Bay	Exposed: 2 x 5.25" + 2 x 3.5" Internal: 2 x 2.5"
PSU Form Factor	PS/2 Single (rear)
Indicators	1x Power Status, 1 x HDD Activity, 2 x LAN Activity
Front Control	Power On/Off, System Reset, 2 x USB2.0
Cooling Fans	Front: 1 x 80mm (T=32mm) Rear: 2 x 40mm (T=28mm) (Option)
System Security	Key lock on front door
Slot Opening	4 x low profile
Metal Thickness	1.0mm
Materials	SGCC
HDD Backplane	N/A
Net Weight	6.9 kg
Gross Weight	9.3 kg
Cubic Feet	2.5
Color	Silver

## Dimension

Unit: mm

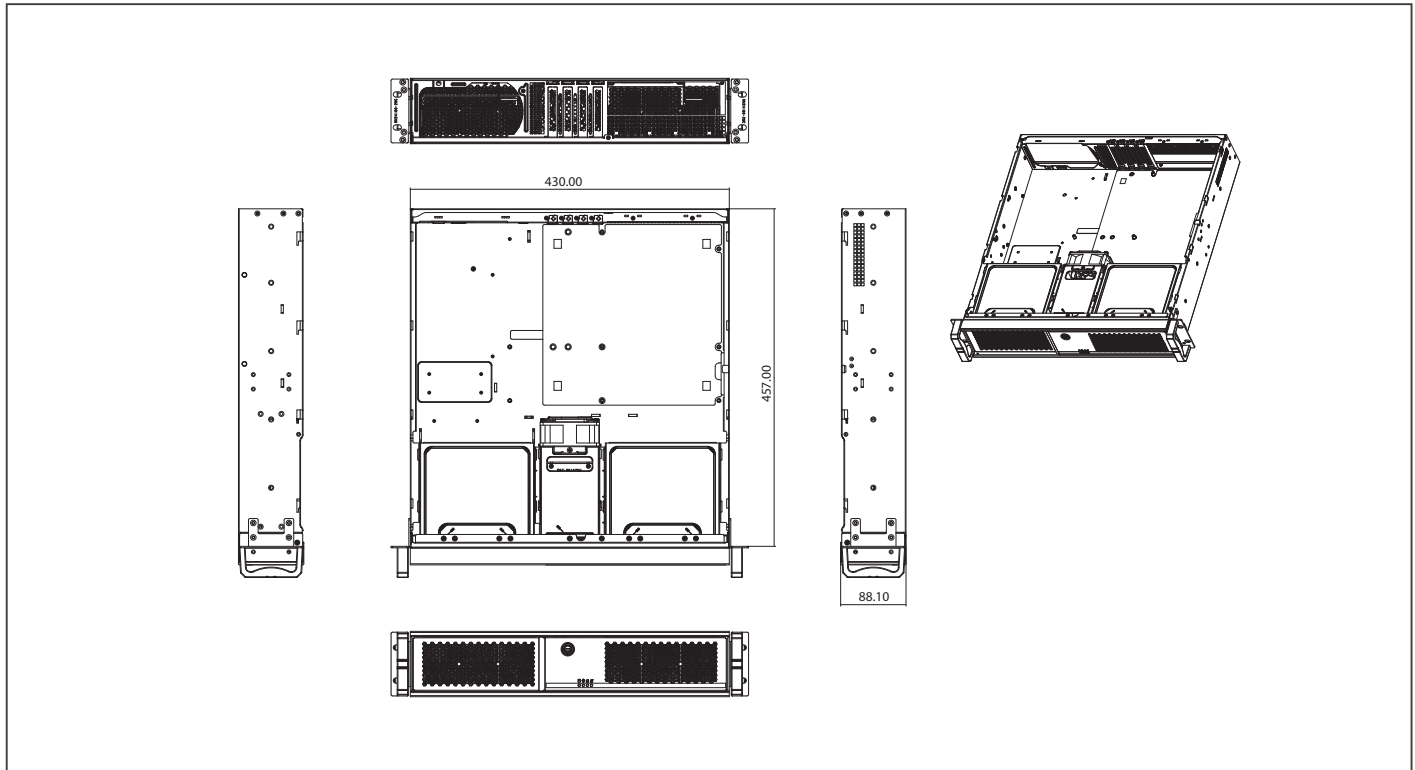

## Packing List

- Accessory Box
- RT-620R

## Ordering Information

- **AP-CH968MY00010**  
2U High Flexibility Industrial Server Chassis

## Optional Accessories

- **COOLER-65W-01**  
1U CPU cooler
- **AP-FNTH1Q370010**  
2U CPU cooler for TDP 95W
- **1702031802**  
Power Cord (US & Taiwan Type)
- **1702031803**  
Power Cord (European Type)
- **170203180E**  
Power Cord (Japanese Type)
- **AP-FW9789182100**  
(TF)3.5" to 2.5" HDD bracket.Tragant.DeLock 18210
- **AP-OT9789343000**  
5.25" converter bracket, supports 1x 3.5" hard drive and 2 x 2.5" hard drive