


# RT-660R

4U 17.5" Rackmount Chassis, Industrial Main Board Support

Front View

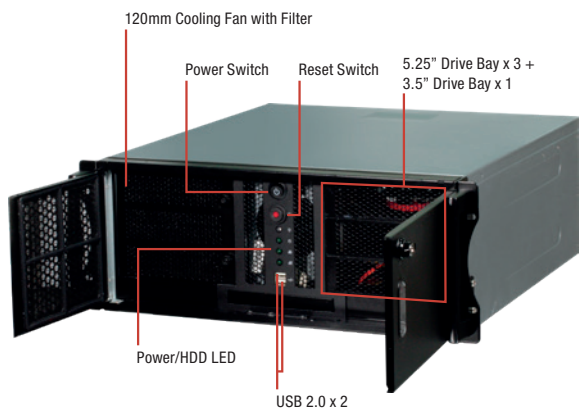

Rear View



## Features


- Supports ATX M/B up to 12" x 9.6"
- Available for rackmount and stand-alone installation
- Truly isolated anti-vibration design on internal HDD and drive cages
- Card retainer to hold low profile and full height add-on cards
- Front 120mm fan with filter for add-on card cooling
- Optional second 3 x 5.25" drive cage for maximum configuration flexibility
- Supports 2-door front bezel configuration
- Supports PS/2 single or mini-redundant PSU

## Specifications

System	
M/B Form Factor	ATX (12" x 9.6") / Micro ATX (9.6" x 9.6")
Dimension (D x W x H)	445 x 430 x 176 (mm), 17.5" x 16.9" x 6.9"
Drive Bay	Exposed: 3 x 5.25", 1 x 3.5", 1 x Slim ODD, Internal: 4 x 3.5"
PSU Form Factor	PS/2 Single or Mini-redundant
Indicators	1 x Power Status, 1 x HDD Activity, 2 x LAN Activity
Front Control	Power On/Off, System Reset, 2 x USB 2.0
Cooling Fans	Front: 1 x 120mm (T=25mm), PWM, Rear: 2 x 80mm (T=25mm)(Option)
System Security	Intrusion Switch, Key lock on front door
Slot Opening	7
Metal Thickness	1.2mm
Materials	SGCC
HDD Backplane	N/A
Net Weight	9.5 kg
Gross Weight	12.3 kg
Cubic Feet	3.44
Color	Silver

## Dimension

Unit: mm

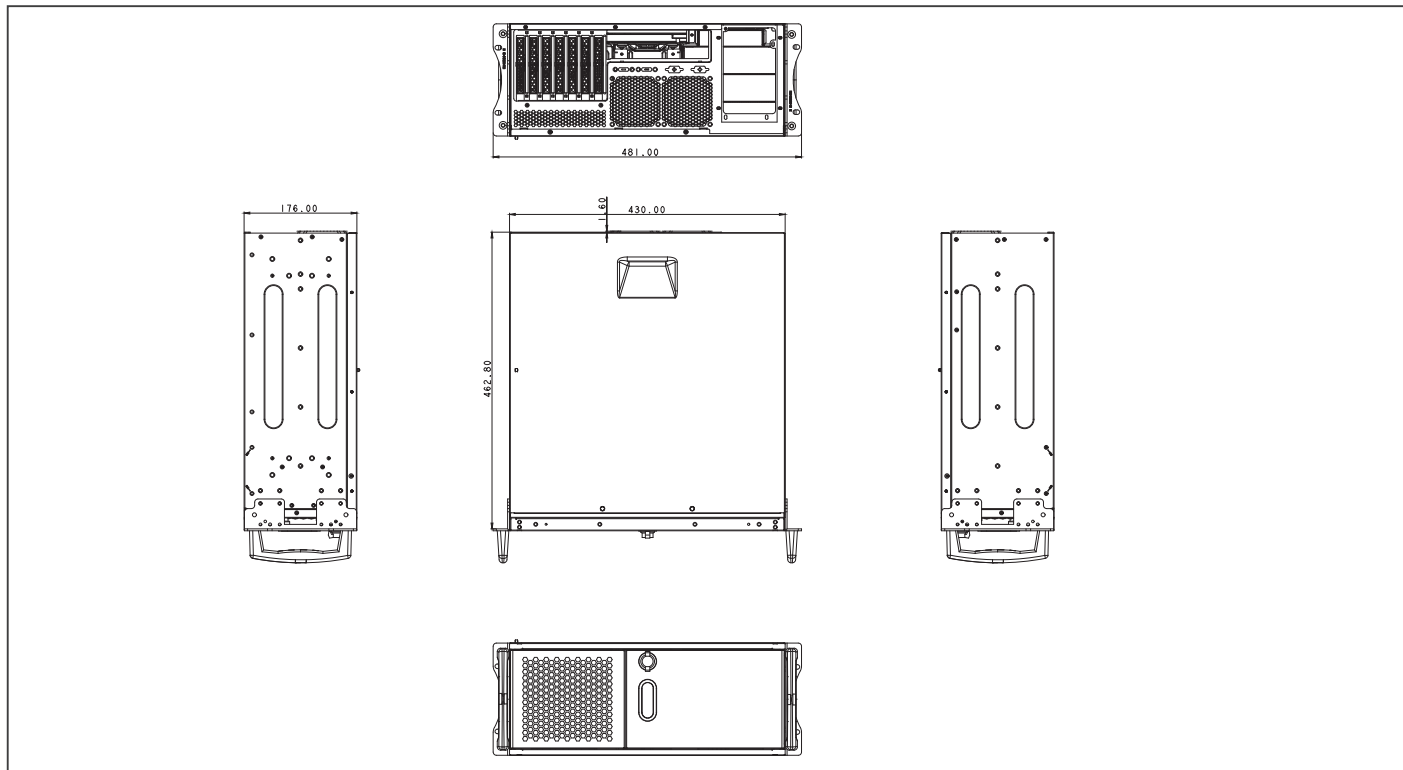

## Packing List

- Accessory Box
- RT-660R

## Ordering Information

- **AP-CH968MY00003**  
4U 17.5" Compact Industrial server chassis

## Optional Accessories

- **175921156B**  
CPU Cooler (2-Ball, Push-pin Type)
- **1759200172**  
CPU Cooler (2-Ball, Screw with Retention Plate)
- **1702031802**  
Power Cord (US & Taiwan Type)
- **1702031803**  
Power Cord (European Type)
- **170203180E**  
Power Cord (Japanese Type)
- **AP-FW9789182100**  
(TF)3.5" to 2.5" HDD bracket.Tragant.DeLock 18210
- **AP-OT9789343000**  
5.25" converter bracket, supports 1x 3.5" hard drive and 2 x 2.5" hard drive
- **1759232902**  
Rear Fan.80\*80\*25mm. 12VDC. PWM 4-pin, L=300mm. sunon. PF80251B1-Q120-S99