

### Features

- VIA Eden™ 400MHz processor
- VIA VT8606 chipset with integrated AGP 4X graphic accelerator
- 10/100Mbps Fast Ethernet
- Supports Type II CompactFlash™ Memory
- Supports NTSC/PAL TV-Out
- 5V only operation
- Fanless and non-cable design



### Specifications

#### System


- **CPU**: VIA Eden 400MHz mobile CPU
- **Memory**: 144pin SDRAM SODIMM x 1, max. 512MB
- **Chipset**: VIA VT8606 + VT82C686B
- **BIOS**: Award 256KB FLASH ROM
- **Ethernet**: 10/100Base-Tx Ethernet RJ-45 connector x 1.
- **SSD**: Type II CompactFlash slot
- **Hard Disk Storage**: 2.5" Slim HDD Bay x 1
- **I/O Ports**: 2 Serial ports: 2 x RS-232  
1 PS/2 keyboard & mouse interface  
1 Audio connector  
1 LVDS LCD D-Sub  
1 CRT D-Sub  
2 TV-Out connectors  
2 USB ports
- **USB**
- **Display**: up to 1600 x 1200@ 16bpp colors for CRT  
up to 1024 x 768@ 18bpp colors for LCD
- **LCD Interface**: 36-bit Dual channel LVDS LCD panel
- **TV-Out**: Supports S-Video and component outputs
- **Watchdog Timer**: Generate a system reset
- **H/W Status Monitoring**: Supports power supply voltages and temperature monitoring

#### Mechanical and Environmental

- **Construction**: Rugged Aluminum Alloy chassis
- **Dimensions**: 7.52" (W) x 1.99" (H) x 4.15" (D)  
(191mm x 50.8mm x 105.5mm)
- **Carton Dimension**: 11.61" (W) x 8.31" (H) x 10.28" (D)  
(295mm x 211mm x 261mm)
- **Gross Weight**: 2.3lb (1.04kg)
- **Operating Temperature**: 32°F-113°F(0°C-45°C)
- **Operating Humidity**: 5-95%@40C, non-condensing

### Dimension Diagram

Unit:mm

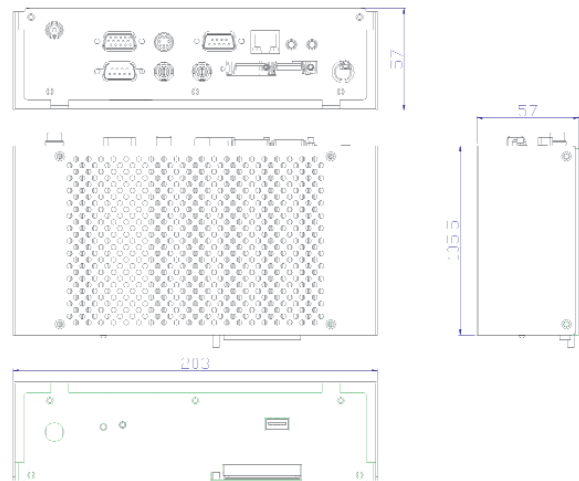

### Ordering Information

P/N	VIA Eden CPU		Power Adapter
	400MHz	667MHz	
AES-6000B-010	V		V
AES-6000B-002		V	V