


PCI VGA Card

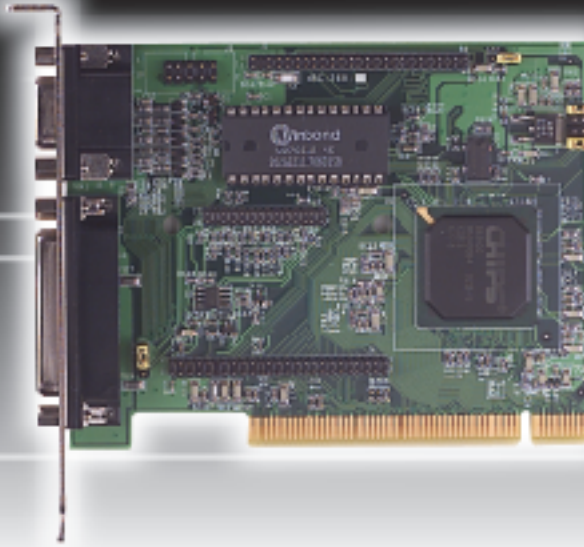

Features

- C&T 69000/69030 flat-panel/CRT controller
- PCI bus
- External CRT interface (D_SUB 15-pin)
- 36-bit universal and LVDS panel interface
- 18 or 36-bit TFT panel interface
- Internal CRT interface (10-pin)
- Supports the CRT display resolutions:
 - A. MBC-2690 : up to 1024x768 65K colors, 800x600 & 640x480 true color, non-interlace
 - B. MBC-2693 : up to 1600x1200 65K colors, 1280x1024 & 1024x768 & 800x600 & 640x480 true color, non-interlace.
- 2MB/4MB SD-RAM on chip
- LVDS external LCD interface (option)
- Emulate EGA, CGA and Hercules display adapters
- Supports simultaneous flat-panel/CRT operation
- Advanced power management features minimizing power consumption during :
 - A. Normal operation
 - B. Stand by (sleep) mode
 - C. Panel-off power saving mode
- Supports AMB-551, AMB-655

Dimension

MBC-2690

Unit:mm

