


PCM-3336

ALi M6117C

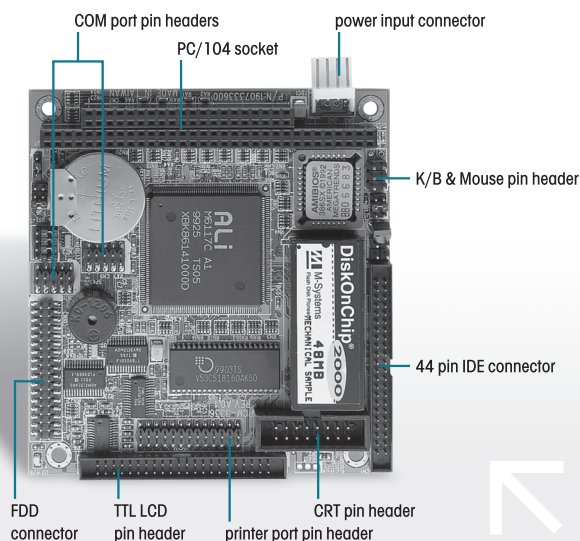

Specifications

System	
CPU	Onboard ALi M6117C, 386SX-40 compatible
System Memory	Onboard 4MB/8MB EDO DRAM
Chipset	ALi M6117C
I/O Chipset	ITE 8661F
BIOS	AMI 128KB FLASH ROM
Watchdog Timer	Generate a time-out system reset, setting via software
SSD	DiskOnChip up to 1GB
Expansion Interface	PC/104 socket x 1
Battery	Lithium battery
Power Requirement	+5V. AT
Board Size	3.55"(L) x 3.775"(W) (90mm x 96mm)
Gross Weight	0.6lb (0.25kg)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Display	
Chip	C&T 65545
Memory	Built-in 512KB DRAM
Resolutions	up to 800 x 600@256 colors for CRT & LCD
LCD Interface	up to 24-bit TTL TFT/DSTN/MONO LCD
I/O	
MIO	IDE x 1, FDD x 1, KB+Mouse x 1, RS-232 x 1, RS-232/422/485 x 1, Parallel x 1

Features

- Onboard ALi M6117C, 386SX-40 compatible
- 24-bit TTL TFT/DSTN/MONO LCD
- Supports DiskOnChip® Memory
- 2 COM
- +5V only operation



Packing List

- **9681333601**
Cable Kit (IDE cable, FDD cable, Serial port cable x 2, Parallel port cable, KB/Mouse cable, VGA cable)
- Quick Installation Guide
- Utility CD
- PCM-3336

Ordering Informations

- **PCM-3336-A11**
PC/104 CPU Module, 386SX-40, Onboard 4MB DRAM, with DOC
- **PCM-3336-A13**
PC/104 CPU Module, 386SX-40, Onboard 8MB DRAM, with DOC

1
Compact Board

2
Sub Compact Board

3
Full-Size CPU Card

4
Half-Size CPU Card

5
Media PC

6
Embedded ATX Board

7
PC/104 Module

8
Mini PCI Module

9
Accessory