


PCM-4335

The Power That Solves

STPC® Client

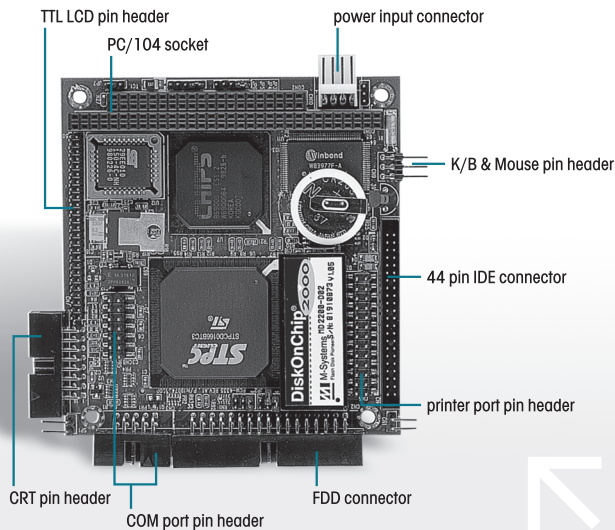

Features

- Onboard STPC® Client
- 36-bit TTL TFT/DSTN/MONO LCD
- Supports DiskOnChip® Memory
- 2 COM
- +5V only operation



Specifications

System	
CPU	Onboard STPC Client 66MHz
System Memory	144-pin EDO DRAM SODIMM x 1, Max. 64MB
Chipset	STPC Client
I/O Chipset	Winbond W83977
BIOS	AMI 128KB FLASH ROM
Watchdog Timer	Generate a time-out system reset, setting via software
SSD	DiskOnChip up to 1GB
Expansion Interface	PC/104 socket x 1
Battery	Lithium battery
Power Requirement	+5V. AT
Board Size	3.55"(L) x 3.775"(W) (90mm x 96mm)
Gross Weight	0.6lb (0.25kg)
Operating Temperature	32 °F ~ 140 °F (0 °C ~ 60 °C)
Display	
Chip	C&T 69000
Memory	Built-in 2MB SDRAM
Resolutions	up to 1280 x 1024 @ 16bpp colors for CRT up to 1024 x 768 @ 18bpp colors for LCD
LCD Interface	up to 36-bit TTL TFT/DSTN/MONO LCD
I/O	
MIO	EIDE x 1, FDD x 1, KB+Mouse x 1, RS-232 x 1, RS-232/422/485 x 1, Parallel x 1

Packing List

- **9681433501**
Cable Kit (IDE cable, FDD cable, Serial port cable x 2, Parallel port cable, KB/Mouse cable, VGA cable)
- Quick Installation Guide
- Utility CD
- PCM-4335

Ordering Information

- **PCM-4335-A12**
PC/104 CPU Module, STPC Client 66MHz, with C&T69000, DOC