


PER-V02B

Computing Platform Service Partner

Mini PCI TTL to DVI LCD Signal Conversion Module

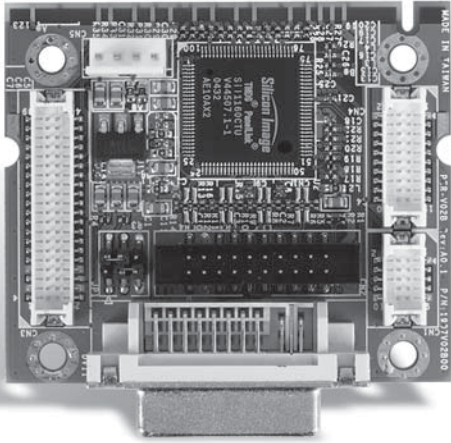

Features

- Supports TTL to DVI LCD Signals Conversion
- Resolution Supports up to 1600 x 1200

Specifications

Form Factor	Mini PCI Type III A 2" x 2.35" (50.8mm x 59.6mm)
Signal Conversion Chipset	Silicon Image Sil1160CTU
Power Requirement	+3.3V
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)

Ordering Information

- TF-PER-V02B-A10**
Mini PCI TTL to DVI LCD Signal Conversion Module Rev. A1.0
- PER-V02B-A10**
Mini PCI TTL to DVI LCD Signal Conversion Module

Optional Accessories


- 1700200200**
DVI Cable
- 1703400207**
TTL Cable for PFM-530I, PFM-535I, PFM-620S, GENE-6310B, GENE-6320, GENE-6350, PCM-6892A/B, PCM-6893, ETX-625

Packing List

- TTL LCD Cable
- Quick Installation Guide
- PER-V02B

PER-C20S

Mini PCI 2 Ports SATA 1 Module

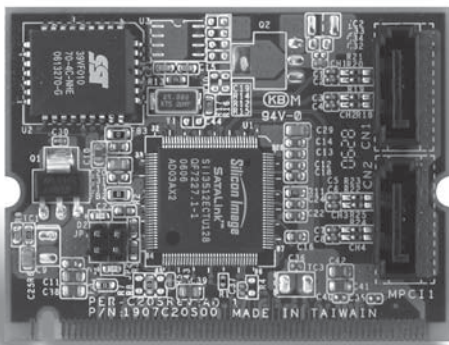

Features

- Mini PCI Type III Interface
- Sil 3512 2-Port Serial ATA Host Controller
- Support RAID 0,1
- +3.3V Only Operation

Specifications

Form Factor	Mini PCI Type III B 1.8"x 2.35" (44.5mm x 59.6mm)
Controller	Sil 3512
Function	Provide two SATA1 Ports, support RAID 0,1 function
Speed	1.5Gbps
Power Requirement	+3.3V
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)

Ordering Information

- TF-PER-C20S-A10**
Mini PCI 2-Port SATA Module Rev. A1.0

Packing List

- Quick Installation Guide
- TF-PER-C20S
- SATA Cable

01

Compact Boards

02

SubCompact Boards

03

Embedded Motherboards

04

PC/104 CPU Modules

05

COM Express CPU Modules

06

ETX CPU Modules

07

RISC CPU Modules

08

Media PCs

09

Mini PCI Modules

10

PC/104 Peripheral Modules

11

Full-size SBC

12

Half-size SBC

13

Accessories