


BP-204SP-P3

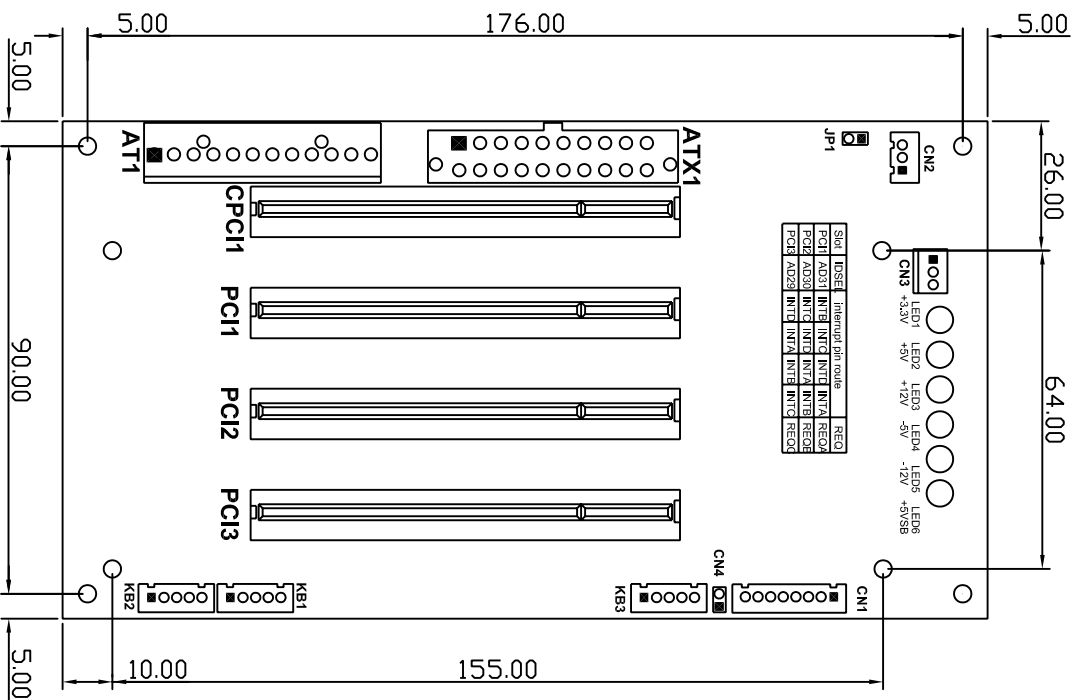

Note:

ATX Power Used:

1. PCI Slot 3.3V Power is Available
2. PICMG Slot 3.3V Power is Available PICMG
- 3.3V Pin : A21,A27,A33,A39,A45,A53,B25,B31, B36,B41,B43,B54

AT Power Used:

1. No support for 3.3V PCI card when AT power supply is used
2. No support 3.3V Power for PICMG
3. If need 3.3V power , Must option JP1 Function

Keyboard (KB1,2,3)




- Pin1:KB_CLOCK
- Pin2:KB_DATA
- Pin3:NC
- Pin4:GND
- Pin5:VCC

Fan(CN3)



- Pin1:GND
- Pin2:+12V
- Pin3:NC

Alarm(CN1)



- Pin1:+5VSB
- Pin2:+12V
- Pin3:+3.3V
- Pin4:-12V
- Pin5:+5V
- Pin6:SMB_CLK
- Pin7:SMB_DATA
- Pin8:GND

PS-ON(CN2)



- Pin1:PS-ON
- Pin2:GND
- Pin3:+5VSB

SMBus(CN4)



- Pin1:SMB_CLK
- Pin2:SMB_DATA

PCI Rounting Table

Slot	IDSEL	Interrupt pin route	REQ			
PCI1	AD31	INTB	INTC	INTD	INTA	REQA
PCI2	AD30	INTC	INTD	INTA	INTB	REQB
PCI3	AD29	INTD	INTA	INTB	INTC	REQC
PCI4	AD28	INTA	INTB	INTC	INTD	REQD