


# BP-204SP-P3

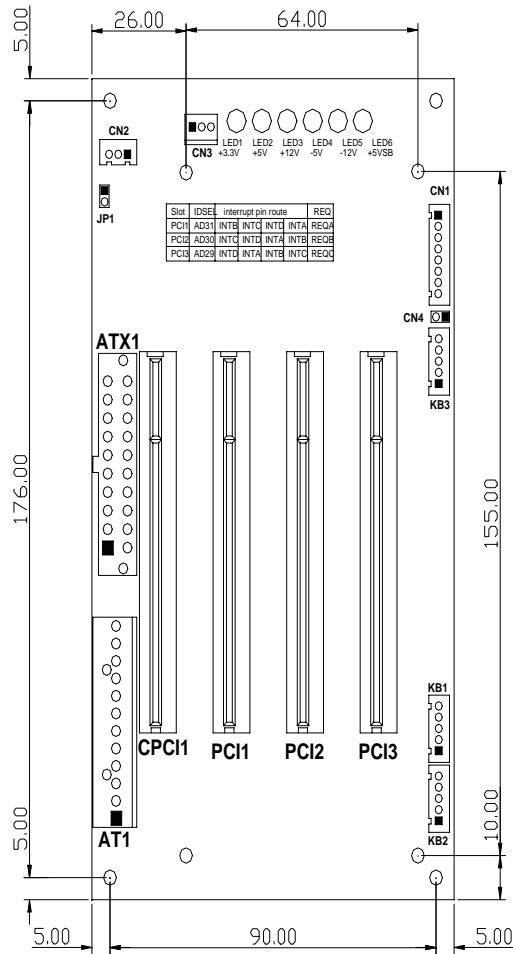

## Note:

### ATX Power Used:

1. PCI Slot 3.3V Power is Available
2. PICMG Slot 3.3V Power is Available
- 3.3V Pin : A21,A27,A33,A39,A45,A53,B25,B31, B36,B41,B43,B54

### AT Power Used:

1. No support for 3.3V PCI card when AT power supply is used
2. No support 3.3V Power for PICMG
3. If need 3.3V power , Must option JP1 Function

## Keyboard (KB1,2,3)




- Pin1:KB\_CLOCK
- Pin2:KB\_DATA
- Pin3:NC
- Pin4:GND
- Pin5:VCC

## Fan(CN3)



- Pin1:GND
- Pin2:+12V
- Pin3:NC

## Alarm(CN1)



- Pin1:+5VSB
- Pin2:+12V
- Pin3:+3.3V
- Pin4:-12V
- Pin5:+5V
- Pin6:SMB\_CLK
- Pin7:SMB\_DATA
- Pin8:GND

## PS-ON(CN2)



- Pin1:PS-ON
- Pin2:GND
- Pin3:+5VSB

## SMBus(CN4)



- Pin1:SMB\_CLK
- Pin2:SMB\_DATA

## PCI Routing Table

Slot	IDSEL	interrupt pin route				REQ
PCI1	AD31	INTB	INTC	INTD	INTA	REQA
PCI2	AD30	INTC	INTD	INTA	INTB	REQB
PCI3	AD29	INTD	INTA	INTB	INTC	REQC
PCI4	AD28	INTA	INTB	INTC	INTD	REQD