


# BP-214SG-P4

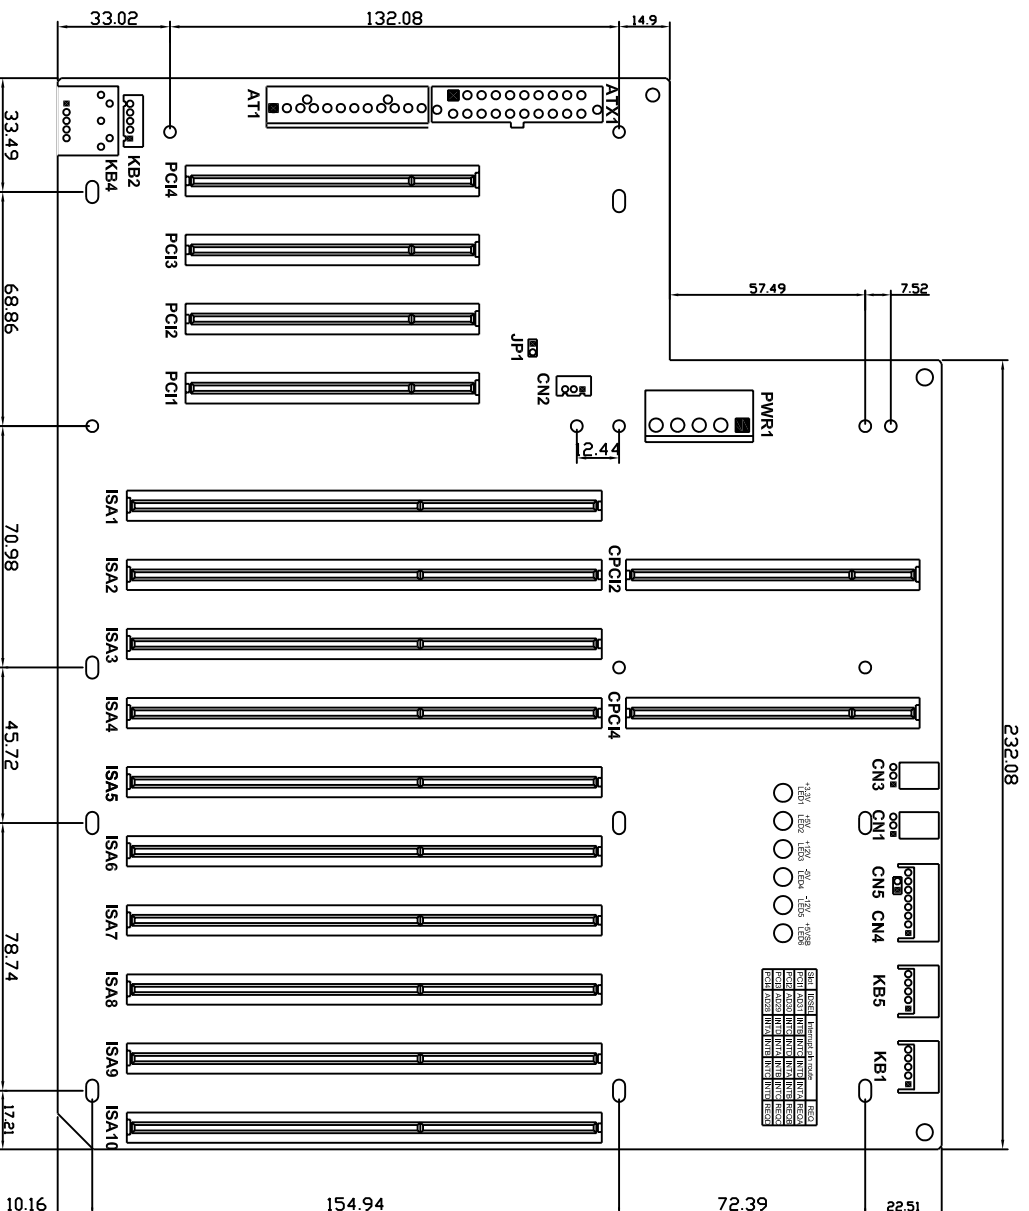

**Note:**

**ATX Power Used:**

1. PCI Slot 3.3V Power is Available
2. PICMG Slot 3.3V Power is Available PICMG
- 3.3V Pin : A21,A27,A33,A39,A45,A53,B25,B31,B36,B41,B43,B54

**AT Power Used:**

1. No support for 3.3V PCI card when AT power supplies is used
2. No support 3.3V Power for PICMG
3. If need 3.3V power , Must option JP1 Function

**Keyboard (KB1,2,5)**




- Pin1:KB\_CLOCK
- Pin2:KB\_DATA
- Pin3:NC
- Pin4:GND
- Pin5:VCC

**Fan(CN1,3)**



- Pin1:GND
- Pin2:+12V
- Pin3:NC

**Alarm(CN4)**



- Pin1:+5VSB
- Pin2:+12V
- Pin3:+3.3V
- Pin4:-12V
- Pin5:+5V
- Pin6:SMB\_CLK
- Pin7:SMB\_DATA
- Pin8:GND

**PS-ON(CN2)**



- Pin1:PS-ON
- Pin2:GND
- Pin3:+5VSB

**SMBus(CN5)**



- Pin1:SMB\_CLK
- Pin2:SMB\_DATA

**PCI Rounting Table**

Slot	IDSEL	Interrupt pin route	REQ
PCI1	AD31	INTB INTC INTD INTA	REQA
PCI2	AD30	INTC INTD INTA INTB	REQB
PCI3	AD29	INTD INTA INTB INTC	REQC
PCI4	AD28	INTA INTB INTC INTD	REQD