

PICO-APL4

PICO-ITX Board

User's Manual 8th Ed

Copyright Notice

This document is copyrighted, 2022. All rights are reserved. The original manufacturer reserves the right to make improvements to the products described in this manual at any time without notice.

No part of this manual may be reproduced, copied, translated, or transmitted in any form or by any means without the prior written permission of the original manufacturer. Information provided in this manual is intended to be accurate and reliable. However, the original manufacturer assumes no responsibility for its use, or for any infringements upon the rights of third parties that may result from its use.

The material in this document is for product information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, AAEMON assumes no liabilities resulting from errors or omissions in this document, or from the use of the information contained herein.

AAEMON reserves the right to make changes in the product design without notice to its users.

Acknowledgement

All other product name or trademarks are properties of their respective owners.

- Microsoft Windows® is a registered trademark of Microsoft Corp.
- Intel®, Pentium® and Celeron® are registered trademarks of Intel Corp.
- Intel Atom™ is a trademark of Intel Corp.
- ITE is a trademark of Integrated Technology Express, Inc.
- IBM, PC/AT, PS/2, and VGA are trademarks of International Business Machines Corporation.

All other product names or trademarks are properties of their respective owners.

Packing List

Before setting up your product, please make sure the following items have been shipped:

Item	Quantity
PICO-APL4	1

If any of these items are missing or damaged, please contact your distributor or sales representative immediately.

About this Document

This User's Manual contains all the essential information, such as detailed descriptions and explanations on the product's hardware and software features (if any), its specifications, dimensions, jumper/connector settings/definitions, and driver installation instructions (if any), to facilitate users in setting up their product.

Users may refer to the product page at AAEON.com for the latest version of this document.

Safety Precautions

Please read the following safety instructions carefully. It is advised that you keep this manual for future references

1. All cautions and warnings on the device should be noted.
2. Make sure the power source matches the power rating of the device.
3. Position the power cord so that people cannot step on it. Do not place anything over the power cord.
4. Always completely disconnect the power before working on the system's hardware.
5. No connections should be made when the system is powered as a sudden rush of power may damage sensitive electronic components.
6. If the device is not to be used for a long time, disconnect it from the power supply to avoid damage by transient over-voltage.
7. Always disconnect this device from any AC supply before cleaning.
8. While cleaning, use a damp cloth instead of liquid or spray detergents.
9. Make sure the device is installed near a power outlet and is easily accessible.
10. Keep this device away from humidity.
11. Place the device on a solid surface during installation to prevent falls
12. Do not cover the openings on the device to ensure optimal heat dissipation.
13. Watch out for high temperatures when the system is running.
14. Do not touch the heat sink or heat spreader when the system is running
15. Never pour any liquid into the openings. This could cause fire or electric shock.
16. As most electronic components are sensitive to static electrical charge, be sure to ground yourself to prevent static charge when installing the internal components. Use a grounding wrist strap and contain all electronic components in any static-shielded containers.

17. If any of the following situations arises, please the contact our service personnel:
 - i. Damaged power cord or plug
 - ii. Liquid intrusion to the device
 - iii. Exposure to moisture
 - iv. Device is not working as expected or in a manner as described in this manual
 - v. The device is dropped or damaged
 - vi. Any obvious signs of damage displayed on the device
18. **DO NOT LEAVE THIS DEVICE IN AN UNCONTROLLED ENVIRONMENT WHERE THE STORAGE TEMPERATURE IS BELOW -20° C (-4°F) OR ABOVE 60°C (140°F) TO PREVENT DAMAGE.**

Warning!



This device complies with Part 15 FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received including interference that may cause undesired operation.

Caution:

There is a danger of explosion if the battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer's instructions and your local government's recycling or disposal directives.

Attention:

Il y a un risque d'explosion si la batterie est remplacée de façon incorrecte. Ne la remplacer qu'avec le même modèle ou équivalent recommandé par le constructeur. Recycler les batteries usées en accord avec les instructions du fabricant et les directives gouvernementales de recyclage.

China RoHS Requirements (CN)

产品中有毒有害物质或元素名称及含量

AAEON Main Board/ Daughter Board/ Backplane

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
印刷电路板 及其电子组件	○	○	○	○	○	○
外部信号 连接器及线材	○	○	○	○	○	○
<p>O: 表示该有毒有害物质在该部件所有均质材料中的含量均在 SJ/T 11363-2006 标准规定的限量要求以下。</p> <p>X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 SJ/T 11363-2006 标准规定的限量要求。</p> <p>备注: 此产品所标示之环保使用期限, 系指在一般正常使用状况下。</p>						

China RoHS Requirement (EN)

Poisonous or Hazardous Substances or Elements in Products

AAEON Main Board/ Daughter Board/ Backplane

Component	Poisonous or Hazardous Substances or Elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (Cr(VI))	Polybrominated Biphenyls (PBB)	Polybrominated Diphenyl Ethers (PBDE)
PCB & Other Components	○	○	○	○	○	○
Wires & Connectors for External Connections	○	○	○	○	○	○
<p>O: The quantity of poisonous or hazardous substances or elements found in each of the component's parts is below the SJ/T 11363-2006-stipulated requirement.</p> <p>X: The quantity of poisonous or hazardous substances or elements found in at least one of the component's parts is beyond the SJ/T 11363-2006-stipulated requirement.</p> <p>Note: The Environment Friendly Use Period as labeled on this product is applicable under normal usage only</p>						

Table of Contents

Chapter 1 - Product Specifications	1
1.1 Specifications	2
Chapter 2 – Hardware Information	4
2.1 Dimensions	5
2.2 Jumpers and Connectors.....	8
2.3 List of Jumpers	10
2.3.1 Auto Power Button Enable/Disable Selection (JP1)	10
2.3.2 Clear CMOS Jumper (JP2)	10
2.4 List of Connectors.....	11
2.4.1 COM Port 2 (CN1)	12
2.4.2 COM Port 1 (CN2)	14
2.4.3 Front Panel Connector (CN3)	15
2.4.4 M.2 Key-E Slot (2230) (CN4).....	15
2.4.5 M.2 Key-B Slot (2280) (CN5).....	18
2.4.6 BIO Port (Optional) (CN6)	21
2.4.7 Digital I/O (CN7).....	24
2.4.8 SATA Port (CN8).....	25
2.4.9 SPI Flash Programming Port (CN9)	26
2.4.10 +5V Output for SATA HDD (CN12)	26
2.4.11 HDMI Port (CN11)	27
2.4.12 Battery (CN12).....	28
2.4.13 LAN (RJ-45) Port1 (CN13).....	28
2.4.14 LAN (RJ-45) Port2 (CN14).....	29
2.4.15 USB 3.0 Ports 0 and 1 (CN15).....	30
2.4.16 External Power Input (CN17)	31
2.4.17 +12V DC Power Jack (Optional) (CN18).....	31

2.4.18	Embedded DisplayPort (Optional) (CN19)	31
2.4.19	USB 2.0 Port 2 (CN20)	33
2.4.20	USB 2.0 Port 1 (CN21)	33
2.4.21	LPC Port (CN22)	34
2.5	Electrical Specifications for I/O Ports	35
2.6	Function Block	36
2.7	Assembly Options	37
2.7.1	PICO-APL4-HSK01	37
2.7.2	PICO-APL4-HSP01	38
2.7.3	PICO-APL4-FAN01	39
Chapter 3 - AMI BIOS Setup		40
3.1	System Test and Initialization	41
3.2	AMI BIOS Setup	42
3.3	Setup Submenu: Main	43
3.4	Setup Submenu: Advanced	44
3.4.1	Trusted Computing	45
3.4.2	CPU Configuration	47
3.4.3	SATA Configuration	49
3.4.4	Hardware Monitor	50
3.4.5	SIO Configuration	51
3.4.5.1	Serial Port 1 Configuration	52
3.4.5.2	Serial Port 2 Configuration	53
3.4.5	Digital IO Port Configuration	54
3.4.6	Power Management	55
3.5	Setup Submenu: Chipset	56
3.5.1	North Bridge	57
3.5.2	South Bridge	58
3.6	Setup Submenu: Security	59

3.6.1	Secure Boot	60
3.6.1.1	Key Management	61
3.7	Setup Submenu: Boot	63
3.7.1	BBS Priorities.....	64
3.8	Setup Submenu: Save & Exit.....	65
Chapter 4 – Drivers Installation.....		66
4.1	Driver Download/Installation	67
Appendix A - I/O Information.....		69
A.1	I/O Address Map	70
A.2	Memory Address Map	71
A.3	IRQ Mapping Chart.....	72
Appendix B – Mating Connectors		75
B.1	List of Mating Connectors and Cables.....	76

Chapter 1

Product Specifications

1.1 Specifications

System

Form Factor	Pico-ITX
CPU	Intel® Pentium® N4200 (4C. 1.1 GHz, up to 2.5 GHz, TDP 6W) Intel® Celeron® N3350 (2C. 1.1 GHz, up to 2.4 GHz, TDP 6W) Intel® Atom™ x7-Series (4C. 1.6GHz, up to 2.00 GHz, TDP 12W)
CPU Frequency	Up to 2.4GHz
Chipset	Intel® SoC
Memory Type	Onboard DDR3L 2GB (Optional 4GB)
Max. Memory Capacity	Up to 4GB
BIOS	AMI/SPI
Wake On LAN	Yes
Watchdog Timer	255 Levels
Power Requirement	+12V, AT/ATX
Power Supply Type	Lockable & Phoenix Terminal co-lay
Power Consumption (Typical)	Intel® Pentium® N4200 at 1.1GHz with DDR3L 4GB; 1.43A at +12V
System Cooling	Heat-spreader, heatsink & cooler (Optional)
Dimension	3.94" x 2.84" (100 mm x 72 mm)
Gross Weight	0.55 lbs. (0.25 kg)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	191,895

System

Certification	CE, FCC
OS Support	Windows 10 (64 bit)

Display

Chipset	Intel® SoC
Resolution	HDMI 1.4b: 3840 x 2160@30Hz Internal eDP: 3840 x 2160@60Hz (Optional) DDI (Optional from BIO)
LCD Interface	eDP

I/O


Storage/SSD	SATA III (6.0Gb/s) x 1, 5V power reserved M.2 2280 (B Key) x 1 eMMC 32GB (Optional 16GB/64GB/128GB)
Ethernet	Realtek 8111 x 2
USB Port	USB3.2 Gen 1 x 2 Rear IO USB2.0 x 2 (Internal, co-use with FAN connector)
Serial Port	COM1: RS-232 x 1 COM2: RS-232/422/485 x 1
Audio	—
DIO	4-bit M.2 2230 x 1 (E-Key)
Expansion Slot	BIO x 1 (optional) I2C, Smbus
SIM	—
TPM	—

Chapter 2


Hardware Information

2.1 Dimensions


Component Side

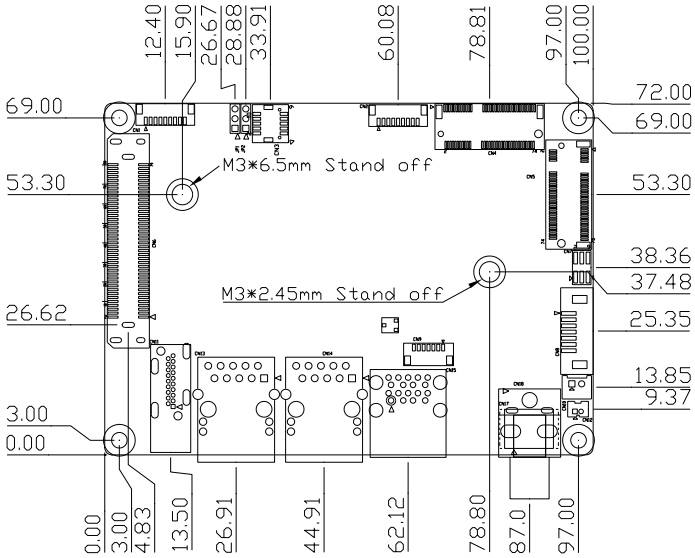

Component Side

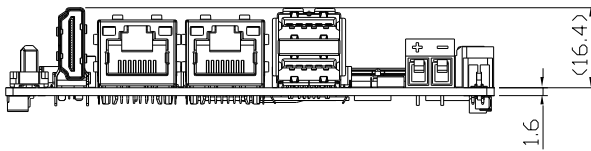

Solder Side

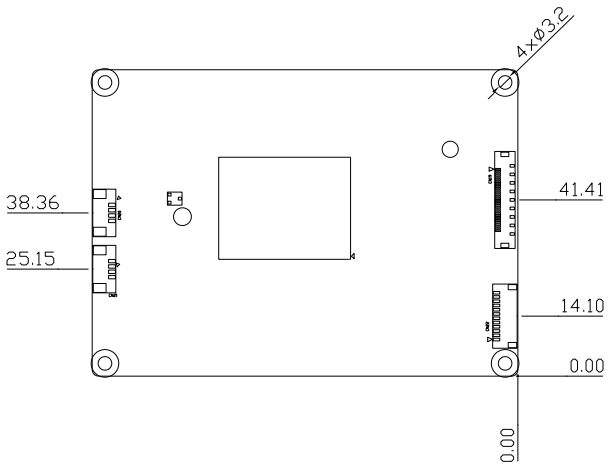


Solder Side

Rear I/O Configuration


Pico-ITX Board

PICO-APL4

Phoenix

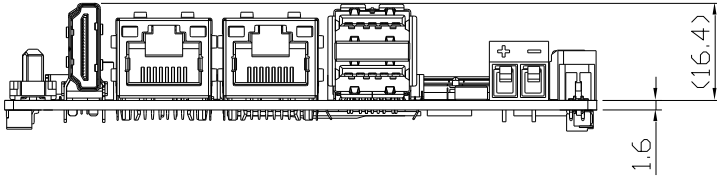


DC Jack

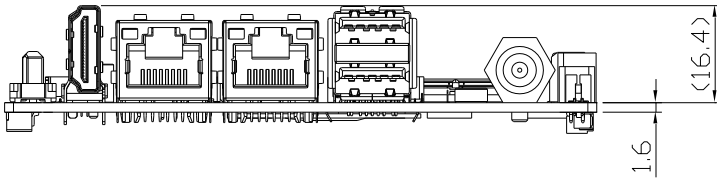


2.2 Jumpers and Connectors


Component Side

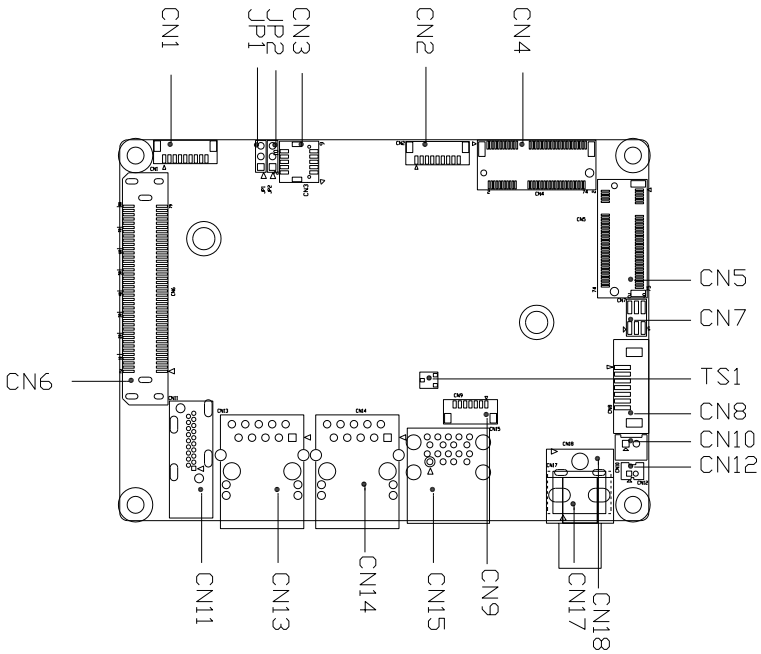

Component Side

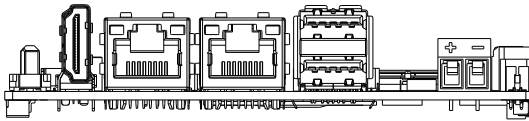

Solder Side

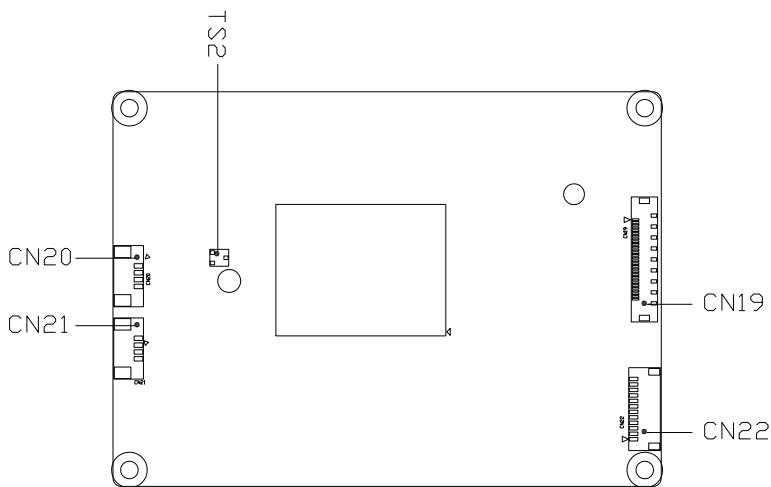


Solder Side

2.3 List of Jumpers


Please refer to the table below for all of the board's jumpers that you can configure for your application

Label	Function
JP1	Auto Power Button Enable/Disable Selection
JP2	Clear CMOS Jumper

2.3.1 Auto Power Button Enable/Disable Selection (JP1)




Enable/AT (Default)




Disable/ATX

Note: When disabled, the power button of CN3 (1-2) is used to power on the system

2.3.2 Clear CMOS Jumper (JP2)



Clear CMOS




Normal (Default)

2.4 List of Connectors

Please refer to the table below for all of the board's connectors that you can configure for your application

Label	Function
CN1	COM Port 2
CN2	COM Port 1
CN3	Front Panel Connector
CN4	M.2 Key-E Slot (2230)
CN5	M.2 Key-B Slot (2280)
CN6	BIO Port (Optional)
CN7	Digital I/O
CN8	SATA Port
CN9	SPI Flash Programming Port
CN10	+5V Output for SATA HDD
CN11	HDMI Port
CN12	Battery
CN13	LAN (RJ-45) Port1
CN14	LAN (RJ-45) Port2
CN15	USB 3.0 Ports 0 and 1
CN17	External Power Input
CN18	+12V DC Power Jack (Optional)
CN19	Embedded DisplayPort (Optional)
CN20	USB 2.0 Port 2
CN21	USB 2.0 Port 1

2.4.1 COM Port 2 (CN1)

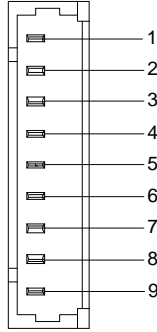

RS232			
Pin	Pin Name	Signal Type	Signal Level
1	DCD2	IN	
2	DSR2	IN	
3	RX2	IN	
4	RTS2	OUT	±5V
5	TX2	OUT	±5V
6	CTS2	IN	
7	DTR2	OUT	±5V
8	RI2/+5V/+12V	IN	+5V/+12V
9	GND	GND	


RS485			
Pin	Pin Name	Signal Type	Signal Level
1	RS485_D2-	I/O	±5V
2	NC		
3	RS485_D2+	I/O	±5V
4	NC		
5	NC		
6	NC		
7	NC		
8	NC/+5V/+12V	PWR	+5V/+12V
9	GND	GND	

RS422			
Pin	Pin Name	Signal Type	Signal Level
1	RS422_TX2-	OUT	±5V
2	NC		
3	RS422_TX2+	OUT	±5V
4	NC		
5	RS422_RX2+	IN	
6	NC		
7	RS422_RX2-	IN	
8	NC/+5V/+12V	PWR	+5V/+12V
9	GND	GND	

Note: COM2 RS-232/422/485 can be set by BIOS setting. Default is RS-232.


Note: Pin 8 function can be changed by BOM.

2.4.2 COM Port 1 (CN2)

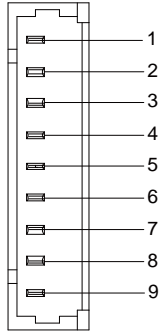

RS232			
Pin	Pin Name	Signal Type	Signal Level
1	DCD1	IN	
2	DSR1	IN	
3	RX1	IN	
4	RTS1	OUT	±9V
5	TX1	OUT	±9V
6	CTS1	IN	
7	DTR1	OUT	±9V
8	RI1	IN	
9	GND	GND	

2.4.3 Front Panel Connector (CN3)



Pin	Pin Name	Pin	Pin Name
1	PWR_BTN-	2	PWR_BTN+
3	HDD_LED-	4	HDD_LED+
5	BUZZER-	6	BUZZER+
7	PWR_LED-	8	PWR_LED+
9	H/W RESET-	10	H/W RESET+

2.4.4 M.2 Key-E Slot (2230) (CN4)

Pin	Pin Name	Signal Type	Signal Level
1	GND	GND	
2	+3.3VSB	PWR	+3.3V
3	USB_D+	DIFF	
4	+3.3VSB	PWR	+3.3V
5	USB_D-	DIFF	
6	NC		
7	GND	GND	
8	NC		
9	NC		
10	NC		
11	NC		

Pin	Pin Name	Signal Type	Signal Level
12	NC		
13	NC		
14	NC		
15	NC		
16	NC		
17	NC		
18	NC		
19	NC		
20	NC		
21	NC		
22	NC		
23	NC		
32	NC		
33	GND	GND	
34	NC		
35	PCIE_TX+	DIFF	
36	NC		
37	PCIE_TX-	DIFF	
38	NC		
39	GND	GND	
40	NC		
41	PCIE_RX+	DIFF	
42	NC		
43	PCIE_RX-	DIFF	
44	NC		
45	GND	GND	

Pin	Pin Name	Signal Type	Signal Level
46	NC		
47	PCIE_REF_CLK+	DIFF	
48	NC		
49	PCIE_REF_CLK-	DIFF	
50	NC		
51	GND	GND	
52	PCIE_RST#	OUT	+3.3V
53	PCIE_CLK_REQ#	IN	+3.3V
54	W_DISABLE2#	OUT	+3.3V
55	PCIE_WAKE#	IN	+3.3V
56	W_DISABLE1#	OUT	+3.3V
57	GND	GND	
58	NC		
59	NC		
60	NC		
61	NC		
62	NC		
63	GND	GND	
64	NC		
65	NC		
66	NC		
67	NC		
68	NC		
69	GND	GND	
70	NC		
71	NC		

Pin	Pin Name	Signal Type	Signal Level
72	+3.3VSB	PWR	+3.3V
73	NC		
74	+3.3VSB	PWR	+3.3V
75	GND	GND	


2.4.5 M.2 Key-B Slot (2280) (CN5)

Pin	Pin Name	Signal Type	Signal Level
1	GND	GND	
2	+3.3V	PWR	+3.3V
3	GND	GND	
4	+3.3V	PWR	+3.3V
5	GND	GND	
6	NC		
7	USB_D+	DIFF	
8	NC		
9	USB_D-	DIFF	
10	SSD_DAS#	IN	+3.3V
11	GND	GND	
20	NC		
21	GND	GND	
22	NC		
23	NC		
24	NC		
25	NC		
26	NC		

Pin	Pin Name	Signal Type	Signal Level
27	GND	GND	
28	NC		
29	NC		
30	NC		
31	NC		
32	NC		
33	GND	GND	
34	NC		
35	NC		
36	NC		
37	NC		
38	DEVSLP	OUT	+1.8V
39	GND	GND	
40	NC		
41	SATA_RX+	DIFF	
42	NC		
43	SATA_RX-	DIFF	
44	NC		
45	GND	GND	
46	NC		
47	SATA_TX-	DIFF	
48	NC		
49	SATA_TX+	DIFF	
50	NC		
51	GND	GND	
52	NC		

Pin	Pin Name	Signal Type	Signal Level
53	NC		
54	NC		
55	NC		
56	NC		
57	GND	GND	
58	NC		
59	NC		
60	NC		
61	NC		
62	NC		
63	GND	GND	
64	NC		
65	NC		
66	NC		
67	NC		
68	NC		
69	GND	GND	
70	+3.3V	PWR	+3.3V
71	GND	GND	
72	+3.3V	PWR	+3.3V
73	GND	GND	
74	+3.3V	PWR	+3.3V
75	GND	GND	

2.4.6 BIO Port (Optional) (CN6)

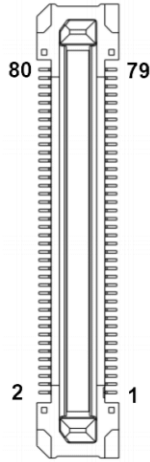


Pin	Pin Name	Signal Type	Signal Level
1	+12VSB	PWR	+12V
2	GND	GND	
3	GND	GND	
4	PCIE_TXN0	DIFF	
5	PCIE_RXN0	DIFF	
6	PCIE_TXP0	DIFF	
7	PCIE_RXP0	DIFF	
8	GND	GND	
9	GND	GND	
10	PCIE_TXN1	DIFF	
11	PCIE_RXN1	DIFF	
12	PCIE_TXP1	DIFF	
13	PCIE_RXP1	DIFF	

Pin	Pin Name	Signal Type	Signal Level
14	GND	GND	
15	GND	GND	
16	PS_ON#	OUT	
17	DDI_DDCCLK	I/O	+3.3V
18	DDI_DDCDATA	I/O	+3.3V
19	+5VSB	PWR	+5V
20	+5VSB	PWR	+5V
21	+5VSB	PWR	+5V
22	+5VSB	PWR	+5V
23	PCIE_REF_CLK0	DIFF	
24	RESET#	OUT	
25	PCIE_REF_CLK0#	DIFF	
26	GND	GND	
27	GND	GND	
28	DDI_TX1N	DIFF	
29	DDI_TX0N	DIFF	
30	DDI_TX1P	DIFF	
31	DDI_TX0P	DIFF	
32	GND	GND	
33	GND	GND	
34	DDI_TX3N	DIFF	
35	DDI_TX2N	DIFF	
36	DDI_TX3P	DIFF	
37	DDI_TX2P	DIFF	
38	GND	GND	
39	GND	GND	

Pin	Pin Name	Signal Type	Signal Level
40	DDI_HPD	IN	+5V
41	DDI_AUXN	DIFF	
42	GND	GND	
43	DDIO_AUXP	DIFF	
44	USB3_TX_N	DIFF	
45	GND	GND	
46	USB3_TX_P	DIFF	
47	USB_D0-	DIFF	
48	GND	GND	
49	USB_D0+	DIFF	
50	USB3_RX_N	DIFF	
51	GND	GND	
52	USB3_RX_P	DIFF	
53	SMB_CLK	I/O	+3.3V
54	GND	GND	
55	SMB_DATA	I/O	+3.3V
56	WAKE#	IN	+3.3V
57	GND	GND	
58	USB_OC#	IN	+3.3V
59	+5V	PWR	+5V
60	USB_OC#	IN	+3.3V
61	+5V	PWR	+5V
62	+5V	PWR	+5V
63	+5V	PWR	+5V
64	+5V	PWR	+5V
65	LPC_AD0	I/O	+3.3V

Pin	Pin Name	Signal Type	Signal Level
66	LPC_FRAME#	IN	+3.3V
67	LPC_AD1	I/O	+3.3V
68	SERIRQ	I/O	+3.3V
69	LPC_AD2	I/O	+3.3V
70	NC		
71	LPC_AD3	I/O	+3.3V
72	BIO_PWOK	IN	+3.3V
73	GND	GND	
74	NC		
75	LPC_CLK	OUT	+3.3V
76	NC		
77	NC		
78	NC		
79	GND	GND	
80	GND	GND	


2.4.7 Digital I/O (CN7)



Pin	Pin Name	Signal Type	Signal Level
1	+5V	PWR	+5V
2	DIO0	I/O	+5V
3	DIO1	I/O	+5V


Pin	Pin Name	Signal Type	Signal Level
4	DIO2	I/O	+5V
5	DIO3	I/O	+5V
6	GND	GND	

2.4.8 SATA Port (CN8)




Pin	Pin Name	Signal Type	Signal Level
1	GND	GND	
2	SATA_TX+	DIFF	
3	SATA_TX-	DIFF	
4	GND	GND	
5	SATA_RX-	DIFF	
6	SATA_RX+	DIFF	
7	GND	GND	

2.4.9 SPI Flash Programming Port (CN9)

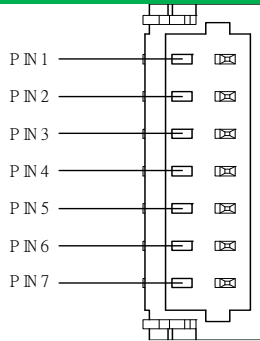


Pin	Pin Name	Signal Type	Signal Level
1	SPI_MISO	OUT	
2	GND	GND	
3	SPI_CLK	IN	
4	+3.3VSB	PWR	+3.3V
5	SPI_MOSI	IN	
6	SPI_CS	IN	
7	NC		

2.4.10 +5V Output for SATA HDD (CN12)



Pin	Pin Name	Signal Type	Signal Level
1	+5V	PWR	+5V
2	GND	GND	

2.4.11 HDMI Port (CN11)

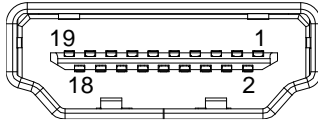


Pin	Pin Name	Signal Type	Signal level
1	TMDS_DAT2+	DIFF	
2	GND	GND	
3	TMDS_DAT2-	DIFF	
4	TMDS_DAT1+	DIFF	
5	GND	GND	
6	TMDS_DAT1-	DIFF	
7	TMDS_DAT0+	DIFF	
8	GND	GND	
9	TMDS_DAT0-	DIFF	
10	TMDS_CLK+	DIFF	
11	GND	GND	
12	TMDS_CLK-	DIFF	
13	NC		
14	NC		
15	DDC_CLK	I/O	+5V
16	DDC_DATA	I/O	+5V
17	GND	GND	
18	+5V	I/O	+5V
19	HPLG_DETECT	IN	

2.4.12 Battery (CN12)


Pin	Pin Name	Signal Type	Signal Level
1	+3.3V	PWR	3.3V
2	GND	GND	

2.4.13 LAN (RJ-45) Port1 (CN13)




Pin	Pin Name	Signal Type	Signal level
1	MDI0+	DIFF	
2	MDI0-	DIFF	
3	MDI1+	DIFF	
4	MDI2+	DIFF	
5	MDI2-	DIFF	
6	MDI1-	DIFF	
7	MDI3+	DIFF	
8	MDI3-	DIFF	

2.4.14 LAN (RJ-45) Port2 (CN14)




Pin	Pin Name	Signal Type	Signal Level
1	MDI0+	DIFF	
2	MDI0-	DIFF	
3	MDI1+	DIFF	
4	MDI2+	DIFF	
5	MDI2-	DIFF	
6	MDI1-	DIFF	
7	MDI3+	DIFF	
8	MDI3-	DIFF	

2.4.15 USB 3.0 Ports 0 and 1 (CN15)

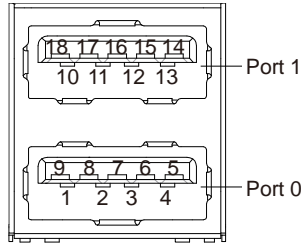

Pin	Pin Name	Signal Type	Signal Level
1	+5VSB	PWR	+5V
2	USB0_D-	DIFF	
3	USB0_D+	DIFF	
4	GND	GND	
5	USB0_SSRX-	DIFF	
6	USB0_SSRX+	DIFF	
7	GND	GND	
8	USB0_SSTX-	DIFF	
9	USB0_SSTX+	DIFF	
10	+5VSB	PWR	+5V
11	USB1_D-	DIFF	
12	USB1_D+	DIFF	
13	GND	GND	
14	USB1_SSRX-	DIFF	
15	USB1_SSRX+	DIFF	
16	GND	GND	
17	USB1_SSTX-	DIFF	
18	USB1_SSTX+	DIFF	

2.4.16 External Power Input (CN17)



Pin	Pin Name	Signal Type	Signal Level
1	+VIN	PWR	+12V
2	GND	GND	

2.4.17 +12V DC Power Jack (Optional) (CN18)


Pin	Pin Name	Signal Type	Signal Level
1	+12V	PWR	+12V
2	GND	GND	
3	GND	GND	

2.4.18 Embedded DisplayPort (Optional) (CN19)

Pin	Pin Name	Signal Type	Signal Level
1	VCC_PWR	PWR	3.3V
2	VCC_PWR	PWR	3.3V
3	GND	GND	
4	GND	GND	
5	EDP_TX2_N	DIFF	
6	EDP_TX2_P	DIFF	
7	GND	GND	


Pin	Pin Name	Signal Type	Signal Level
8	EDP_TX1_N	DIFF	
9	EDP_TX1_P	DIFF	
10	GND	GND	
11	EDP_TX0_N	DIFF	
12	EDP_TX0_P	DIFF	
13	GND	GND	
14	EDP_TX3_N	DIFF	
15	EDP_TX3_P	DIFF	
16	GND	GND	
17	EDP_AUXN	DIFF	
18	EDP_AUXP	DIFF	
19	GND	GND	
20	EDP_BKLTNESS	OUT	+3.3V
21	NC		
22	EDP_BKLTEN	OUT	+3.3V
23	EDP_HPDI	IN	
24	GND	GND	
25	GND	GND	
26	GND	GND	
27	+12V	PWR	+12V
28	+12V	PWR	+12V
29	+12V	PWR	+12V
30	+12V	PWR	+12V

2.4.19 USB 2.0 Port 2 (CN20)

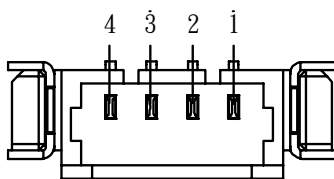


Pin	Pin Name	Signal Type	Signal Level
1	+5VSB	PWR	+5V
2	USB_D-	DIFF	
3	USB_D+	DIFF	
4	GND	GND	

2.4.20 USB 2.0 Port 1 (CN21)

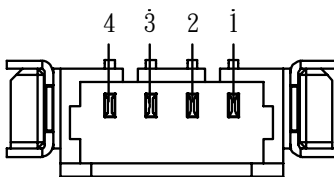

Pin	Pin Name	Signal Type	Signal Level
1	+5VSB	PWR	+5V
2	USB_D-	DIFF	
3	USB_D+	DIFF	
4	GND	GND	

2.4.21 LPC Port (CN22)

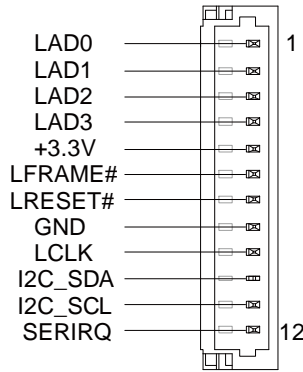

Pin	Pin Name	Signal Type	Signal Level
1	LAD0	I/O	+3.3V
2	LAD1	I/O	+3.3V
3	LAD2	I/O	+3.3V
4	LAD3	I/O	+3.3V
5	+3.3V	PWR	+3.3V
6	LFRAME#	IN	
7	LRESET#	OUT	+3.3V
8	GND	GND	
9	LCLK	OUT	
10	SMB_DATA/I2C_SDA	I/O	+3.3V
11	SMB_CLK/I2C_SCL	OUT	+3.3V
12	SMB_ALERT/INT_SERIRQ	I/O	+3.3V

Note: I2C/SMBus (pins 10, 11, 12) can be set by Bios Option Menu (BOM)


R406/R403/R414: I2C (default)

R405/R408/R411: SMBus

2.5 Electrical Specifications for I/O Ports

I/O	Reference	Signal Level	Rate Output
COM Port 2	CN1	+5V/+12V	+5V/0.5A or +12V/0.5A
M.2 Key-E Slot (2230)	CN4	+3.3VSB	+3.3V/2A
M.2 Key-B Slot (2280)	CN5	+3.3V	+3.3V/2.5A
Digital IO Port	CN7	+5V	+5V/1A
+5V Output for SATA HDD	CN10	+5V	+5V/1A
USB Ports 0 and 1	CN15	+5VSB	+5V/1A (per channel)
USB 2.0 Ports 2	CN20	+5VSB	+5V/0.5A
USB 2.0 Ports 1	CN21	+5VSB	+5V/0.5A


2.6 Function Block

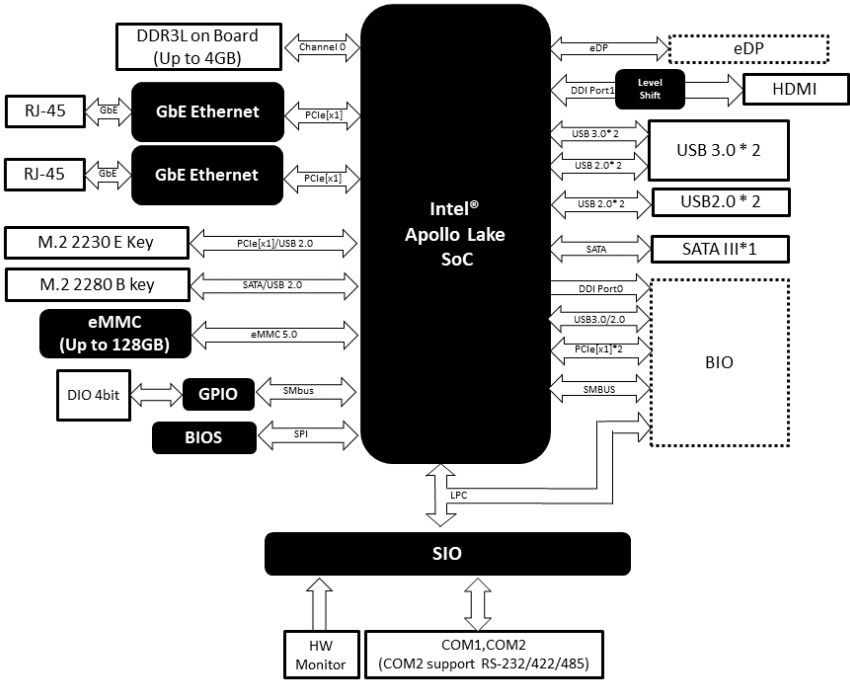

2.7 Assembly Options

2.7.1 PICO-APL4-HSK01


AAEON provides a heat spreader and a heatsink with both studs and screws included as options. AAEON suggests using both for assembly.

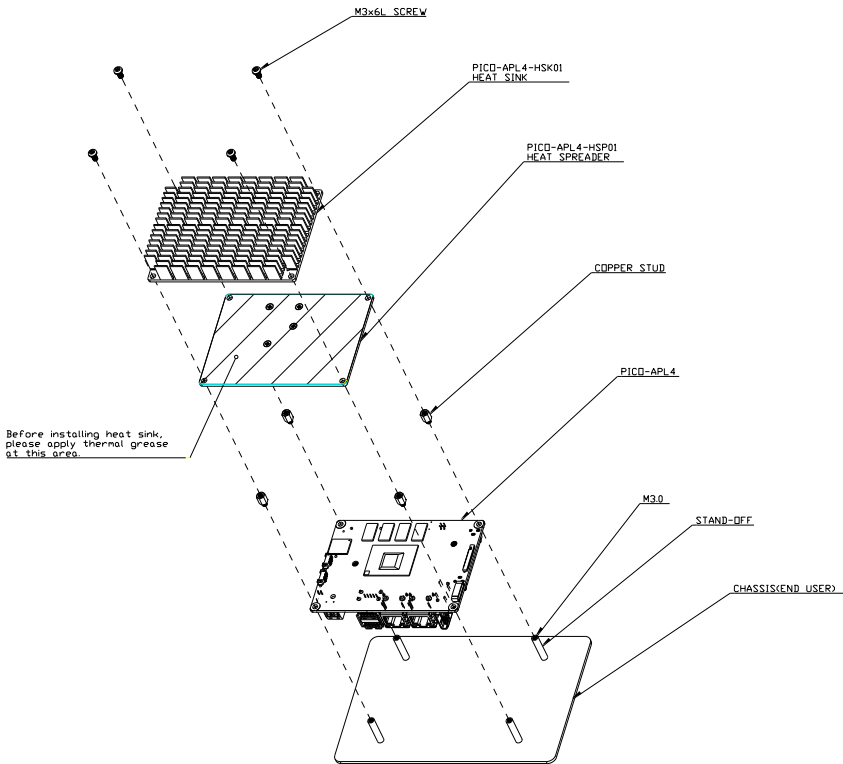


Note: For best performance and reliability, AAEON advises enabling a power limit in BIOS setup when using a passive cooling solution.

2.7.2 PICO-APL4-HSP01

If installing the PICO-APL4 onto a chassis with only the heat spreader provided by AAEON, make sure to apply thermal grease between the heat spreader and chassis.

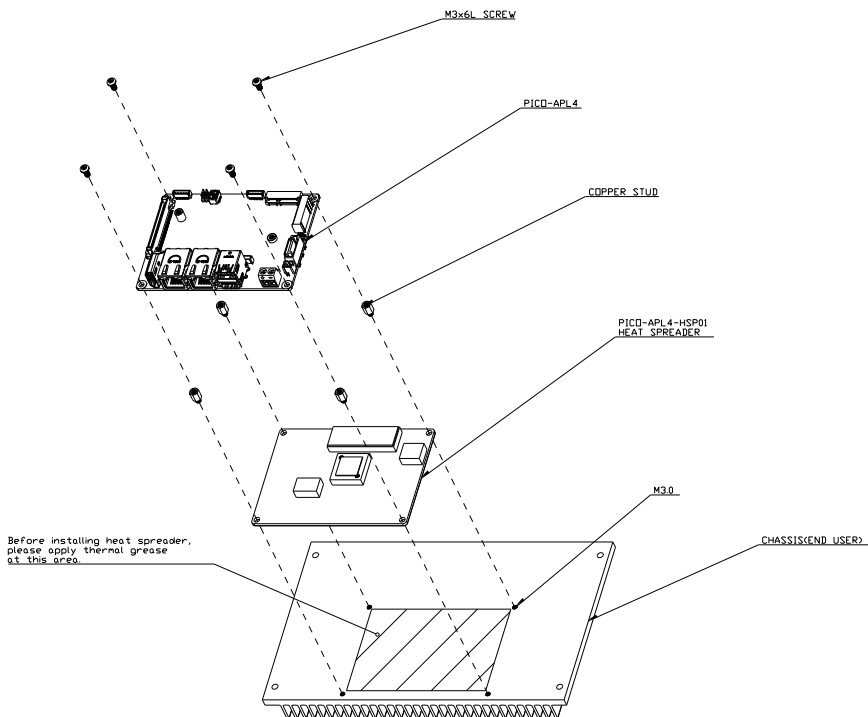

2.7.3 PICO-APL4-FAN01

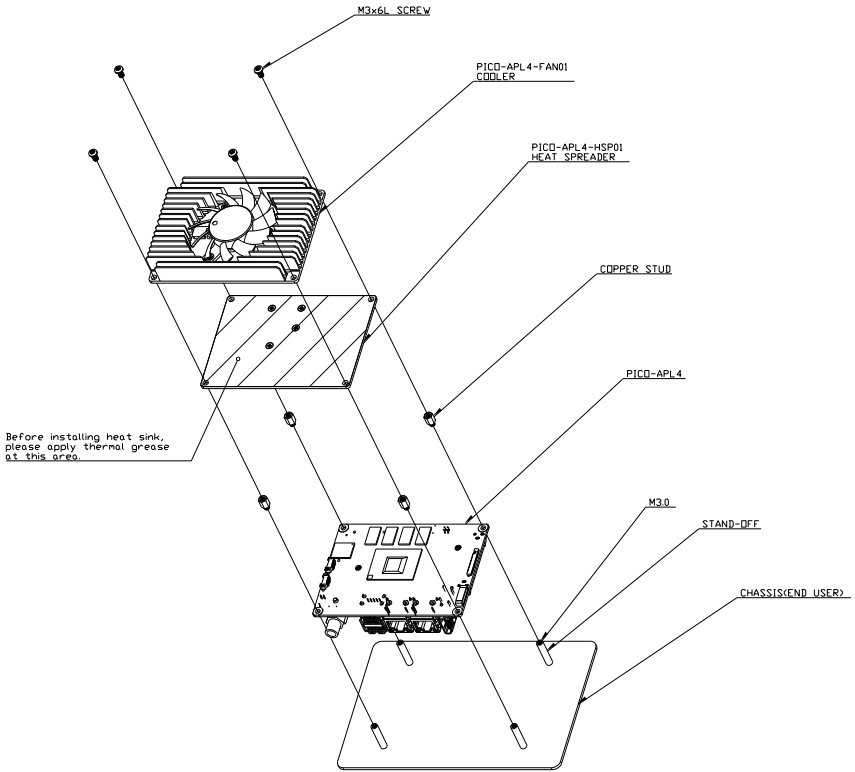

Note: The active cooling solution can be operated via +5V USB power from CN20 or CN21 without fan speed control.

Chapter 3

AMI BIOS Setup

3.1 System Test and Initialization

These routines test and initialize board hardware. If the routines encounter an error during the tests, you will either hear a few short beeps or see an error message on the screen. There are two kinds of errors: fatal and non-fatal. The system can usually continue the boot up sequence with non-fatal errors.

System configuration verification

These routines check the current system configuration stored in the CMOS memory and BIOS NVRAM. If system configuration is not found or system configuration data error is detected, system will load optimized default and re-boot with this default system configuration automatically.

There are four situations in which you will need to setup system configuration:

1. You are starting your system for the first time
2. You have changed the hardware attached to your system
3. The system configuration is reset by Clear-CMOS jumper
4. The CMOS memory has lost power and the configuration information has been erased.

The PICO-APL4 CMOS memory has an integral lithium battery backup for data retention. However, you will need to replace the complete unit when it finally runs down.

3.2 AMI BIOS Setup

AMI BIOS ROM has a built-in Setup program that allows users to modify the basic system configuration. This type of information is stored in battery-backed CMOS RAM and BIOS NVRAM so that it retains the Setup information when the power is turned off.

Entering Setup

Power on the computer and press or <ESC> immediately. This will allow you to enter Setup.

Main – Date and time can be set here. Press <Tab> to switch between date elements

Advanced – Access and configure advanced processor options and features.


Chipset – Chipset and host bridge options and features

Boot – Set boot options including boot priority and Quiet Boot option


Security – The setup administrator password can be set here

Save & Exit – Save your changes and exit the program


3.3 Setup Submenu: Main

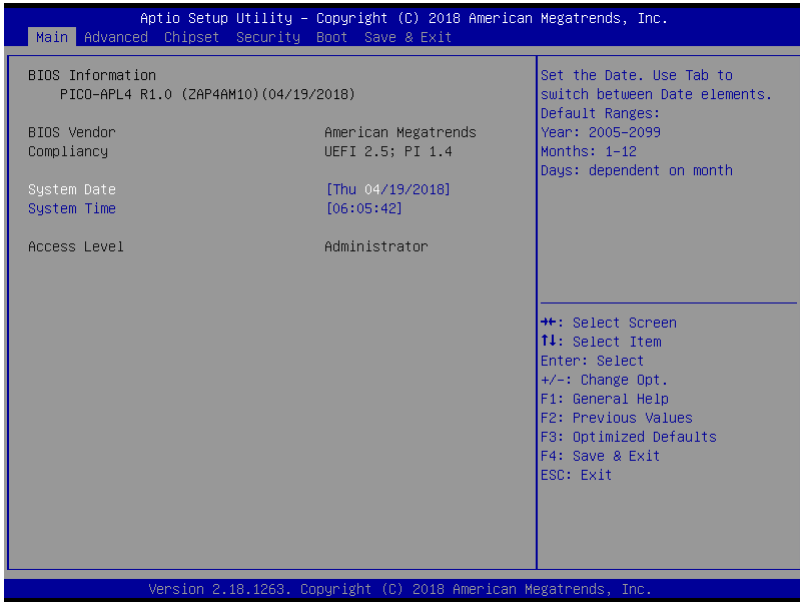

3.4 Setup Submenu: Advanced

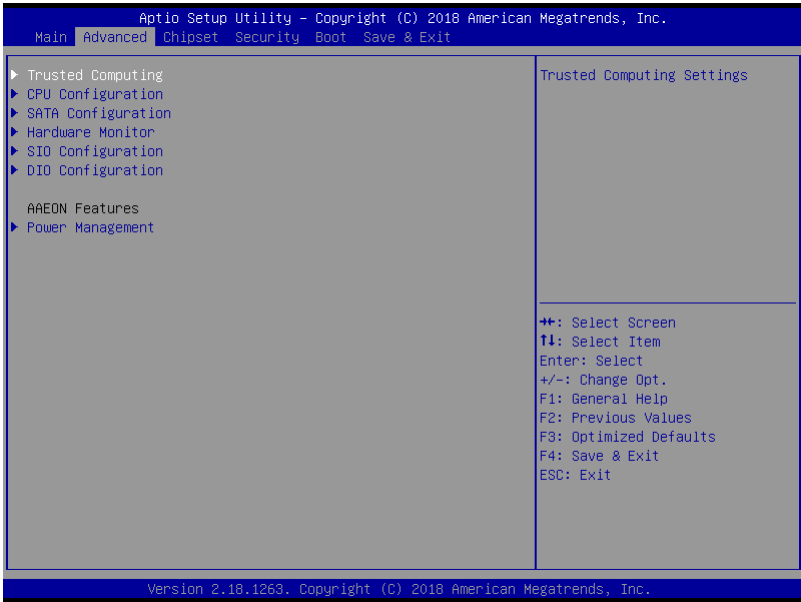


3.4.1 Trusted Computing

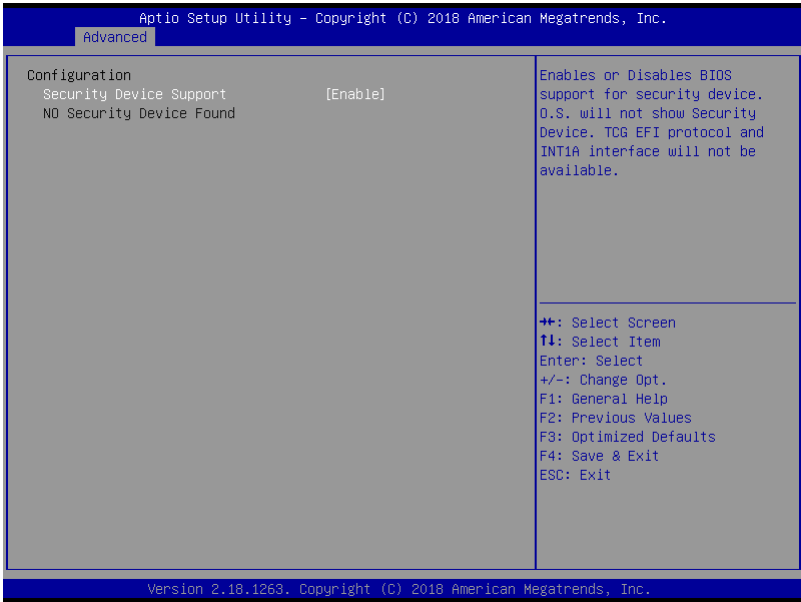

Options Summary		
Security Device Support	Disable	
	Enable	Optimal Default, Failsafe Default
Enables or Disables BIOS support for security device. O.S. will not show Security Device. TCG EFI protocol and INT1A interface will not be available.		
SHA-1 PCR Bank	Disable	
	Enable	Optimal Default, Failsafe Default
Enable or Disable SHA-1 PCR Bank		
SHA256 PCR Bank	Disable	
	Enable	Optimal Default, Failsafe Default
Enable or Disable SHA256 PCR Bank		
Pending Operation	None	Optimal Default, Failsafe Default
	TPM Clear	
Schedule an Operation for the Security Device. NOTE: Your Computer will reboot during restart in order to change State of Security Device.		
Platform Hierarchy	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable or disable Platform Hierarchy		

Options Summary		
Storage Hierarchy	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable or Disable Storage Hierarchy		
Endorsement Hierarchy	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable or Disable Endorsement Hierarchy		
TPM2.0 UEFI Spec Version	TCG_1_2	
	TCG_2	Optimal Default, Failsafe Default
Select the TCG2 Spec Version Support, TCG_1_2: the Compatible mode for Win8/Win10 TCG_2: Support new TCG2 protocol and event format for Win10 or later		
Physical Presence Spec Version	1.2	
	1.3	Optimal Default, Failsafe Default
Select to Tell O.S. to support PPI Spec Version 1.2 or 1.3. Note some HCK tests might not support 1.3.		

3.4.2 CPU Configuration

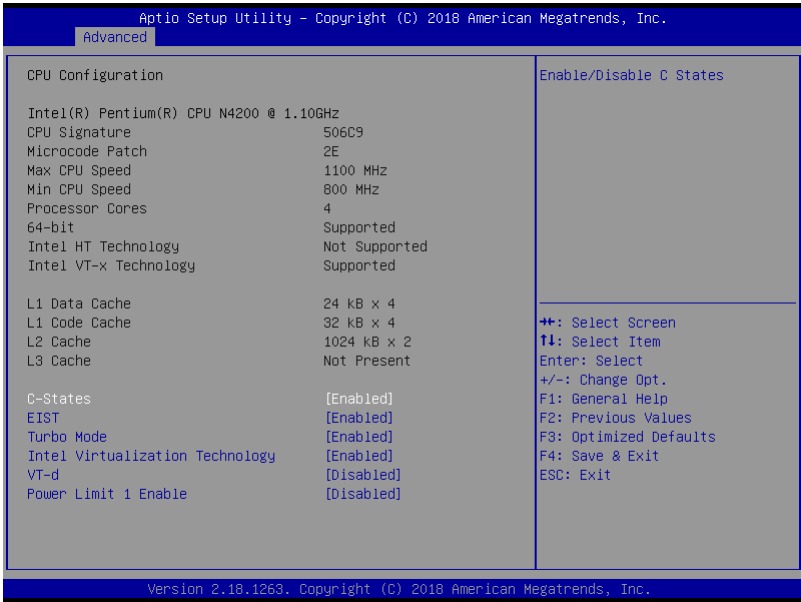


Options Summary		
C-States	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable/Disable C States.		
EIST™	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable/Disable Intel SpeedStep.		
Turbo Mode	Disabled	
	Enabled	Optimal Default, Failsafe Default
Turbo Mode		
Intel Virtualization Technology	Disabled	
	Enabled	Optimal Default, Failsafe Default
When enabled, a VMM can utilize the additional hardware capabilities provided by Vanderpool Technology.		
VT-d	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enable/Disable CPU VT-d		

Table Continues on Next Page...

Options Summary

Power Limit 1 Enable	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enable/Disable Power Limit 1		

3.4.3 SATA Configuration

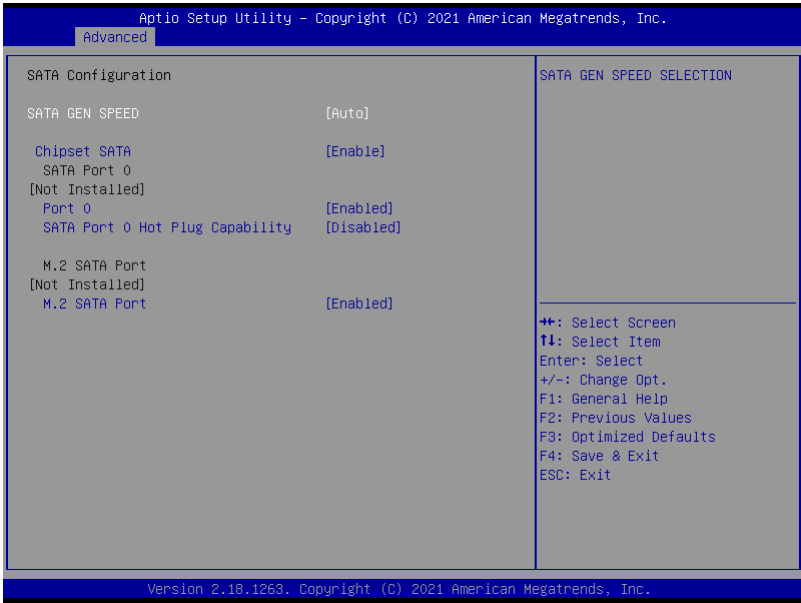

Options Summary		
SATA GEN SPEED	AUTO	Optimal Default, Failsafe Default
	GEN1	
	GEN2	
	GEN3	
SATA GEN SPEED SELECTION		
Port0 / M.2 port	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enable/Disable SATA port		
SATA Port 0 Hot Plug Capability	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enable/Disable SATA port hot plug		

3.4.4 Hardware Monitor

Aptio Setup Utility - Copyright (C) 2018 American Megatrends, Inc.

Advanced


Pc Health Status

CPU Temperature(DTS)	: +40 ℃
THERMAL_SRC1(T1)	: +30 ℃
THERMAL_SRC2(T2)	: +27 ℃
VCORE	: +0.760 V
VMEM	: +1.360 V
+3.3V	: +3.280 V
VBAT	: +3.200 V


++: Select Screen
T1: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save & Exit
ESC: Exit

Version 2.18.1263. Copyright (C) 2018 American Megatrends, Inc.

3.4.5 SIO Configuration

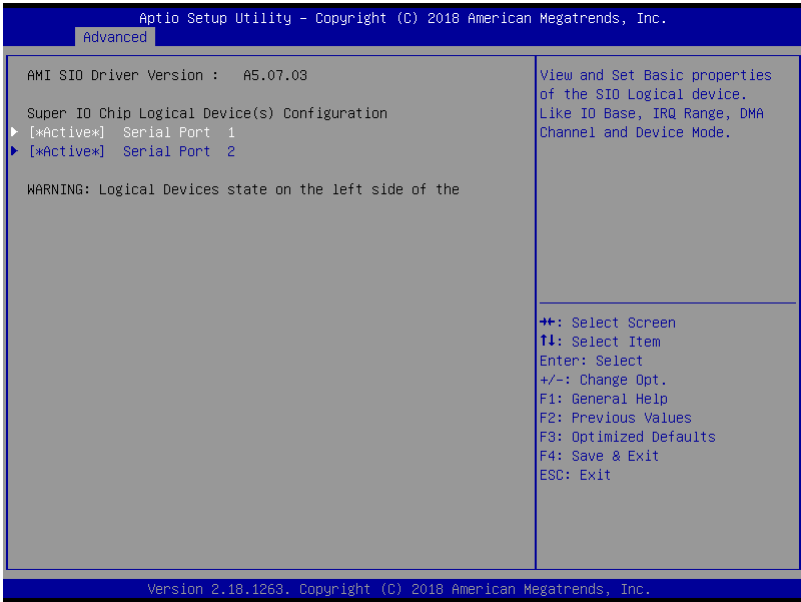


3.4.5.1 Serial Port 1 Configuration

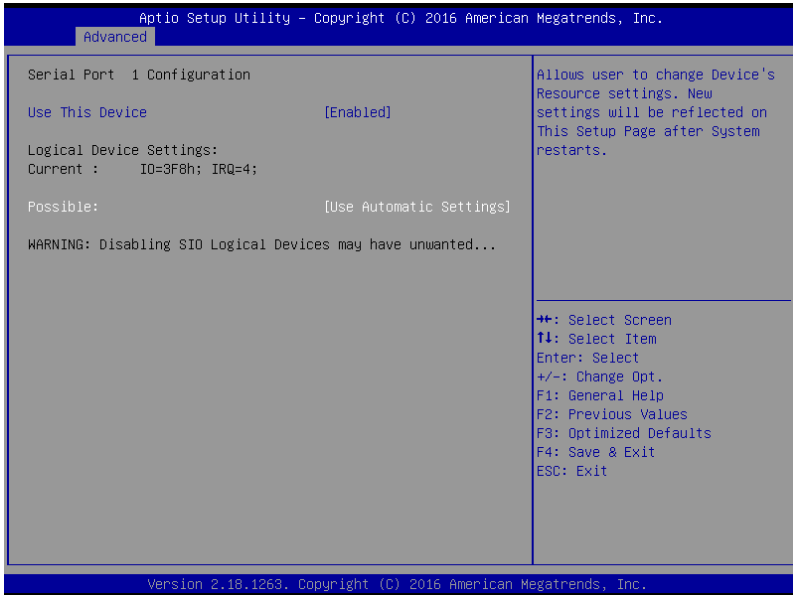


Options Summary		
Use This Device	Disable	
	Enable	Optimal Default, Failsafe Default
Enable or Disable this Logical Device.		
Possible:	Use Automatic Settings	Optimal Default, Failsafe Default
	IO=3F8h; IRQ=4	
	IO=2F8h; IRQ=3	
Allows user to change Device's Resource settings. New settings will be reflected on This Setup Page after System restarts.		

3.4.5.2 Serial Port 2 Configuration

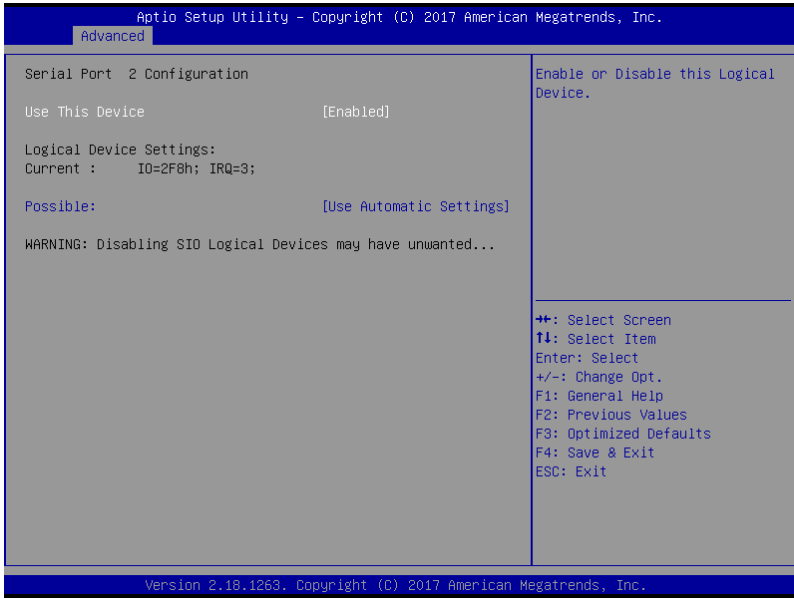


Options Summary		
Use This Device	Disable	
	Enable	Optimal Default, Failsafe Default
Enable or Disable this Logical Device.		
Possible:	Use Automatic Settings	Optimal Default, Failsafe Default
	IO=2F8h; IRQ=3	
	IO=3F8h; IRQ=4	
Allows user to change Device's Resource settings. New settings will be reflected on This Setup Page after System restarts.		

3.4.5 Digital IO Port Configuration

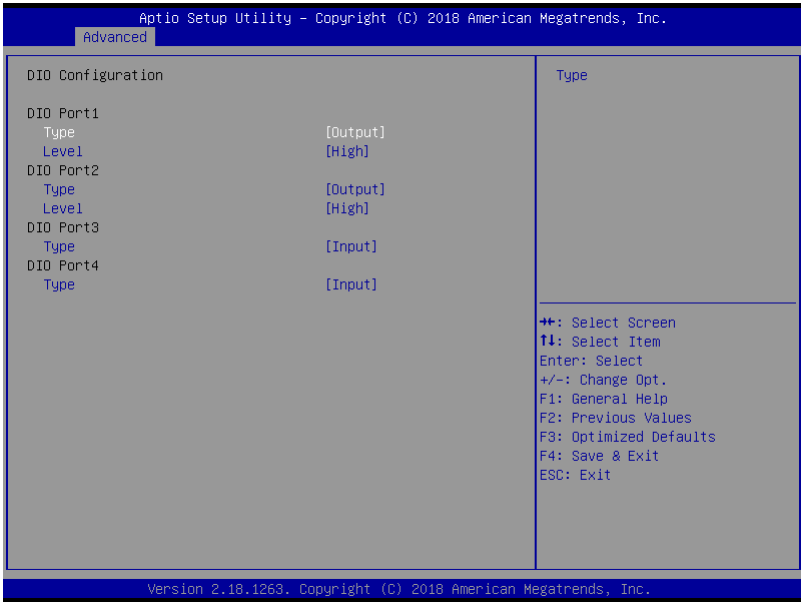


Options Summary		
DIO Port*	Output	
	Input	
Set DIO as Input or Output		
Output Level	High	Optimal Default, Failsafe Default
	Low	
Set output level when DIO pin is output		

3.4.6 Power Management

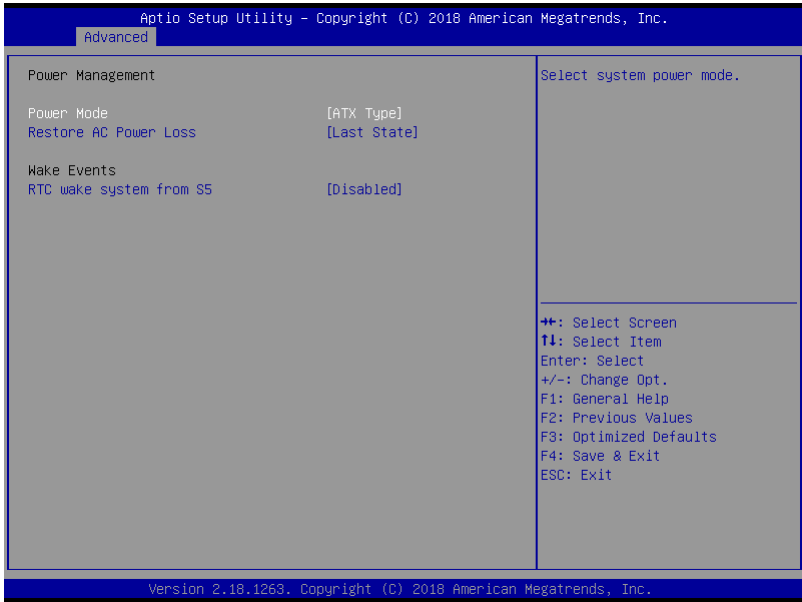


Options Summary		
Power Mode	ATX Type	Optimal Default, Failsafe Default
	AT Type	
Select system power mode		
Restore AC Power Loss	Last State	Optimal Default, Failsafe Default
	Always On	
	Always Off	
Determine the system turn on or off after AC resume from G3 to S5 state		
RTC wake system from S5	Disable	Optimal Default, Failsafe Default
	Fixed Time	
Fixed Time: System will wake on the hr::min::sec specified.		


3.5 Setup Submenu: Chipset

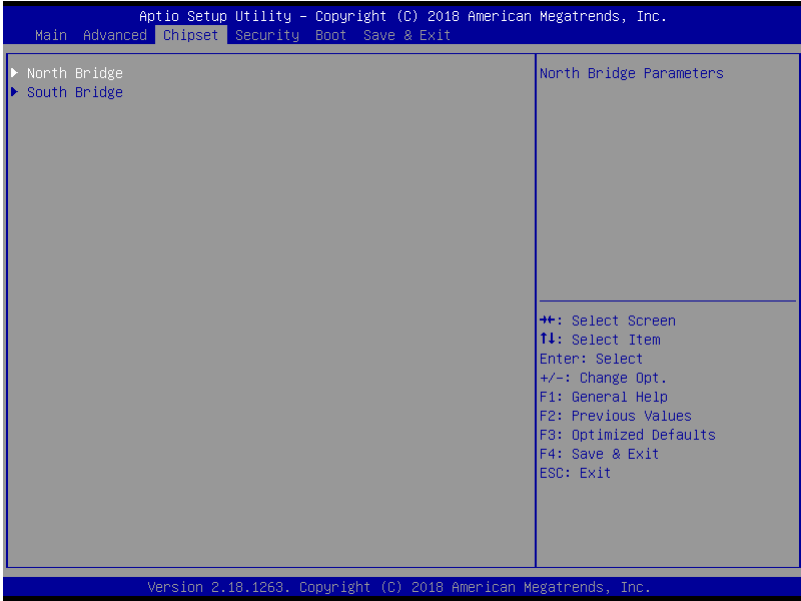

3.5.1 North Bridge

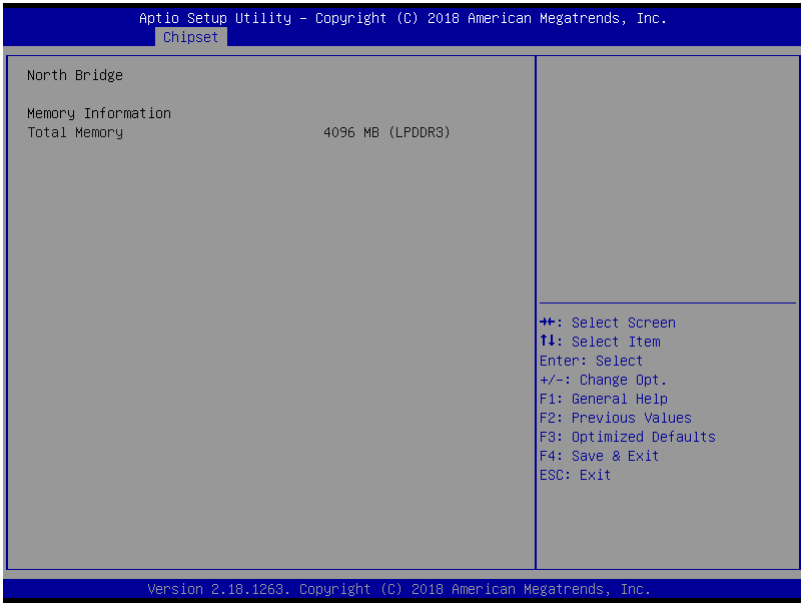


3.5.2 South Bridge

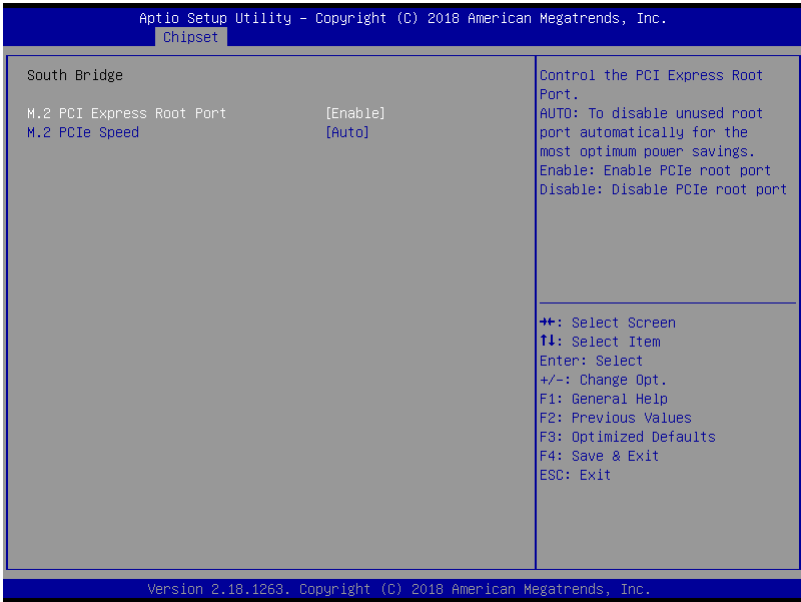

Options Summary		
M.2 PCI Express Root Port	Disable	
	Enable	Optimal Default, Failsafe Default
	Auto	
Control the PCI Express Root Port. AUTO: To disable unused root port automatically for the most optimum power savings. Enable: Enable PCIe root port Disable: Disable PCIe root port		
M.2 PCIe Speed	Auto	Optimal Default, Failsafe Default
	Gen1	
	Gen2	
Configure PCIe Speed		

3.6 Setup Submenu: Security

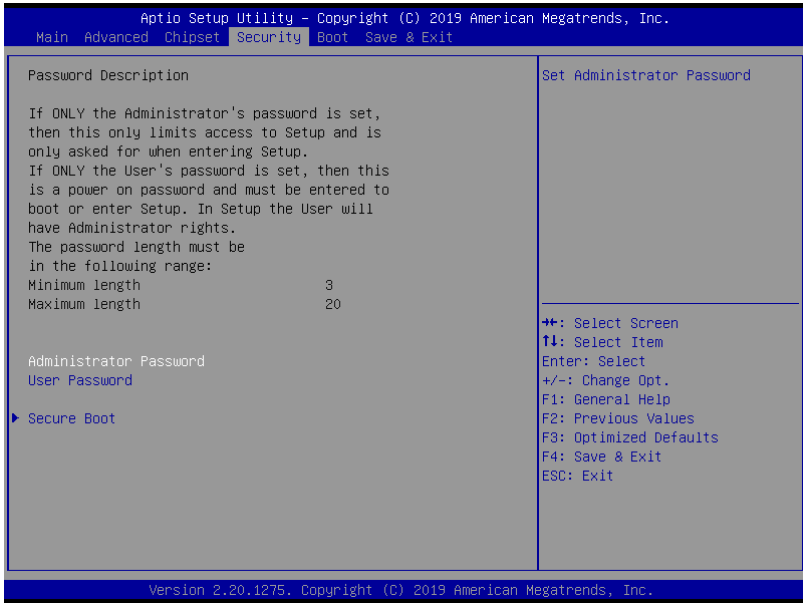

Change User/Administrator Password


You can set an Administrator Password or User Password. An Administrator Password must be set before you can set a User Password. The password will be required during boot up, or when the user enters the Setup utility. A User Password does not provide access to many of the features in the Setup utility.

Select the password you wish to set, and press Enter. In the dialog box, enter your password (must be between 3 and 20 letters or numbers). Press Enter and retype your password to confirm. Press Enter again to set the password.

Removing the Password


Select the password you want to remove and enter the current password. At the next dialog box press Enter to disable password protection.

3.6.1 Secure Boot

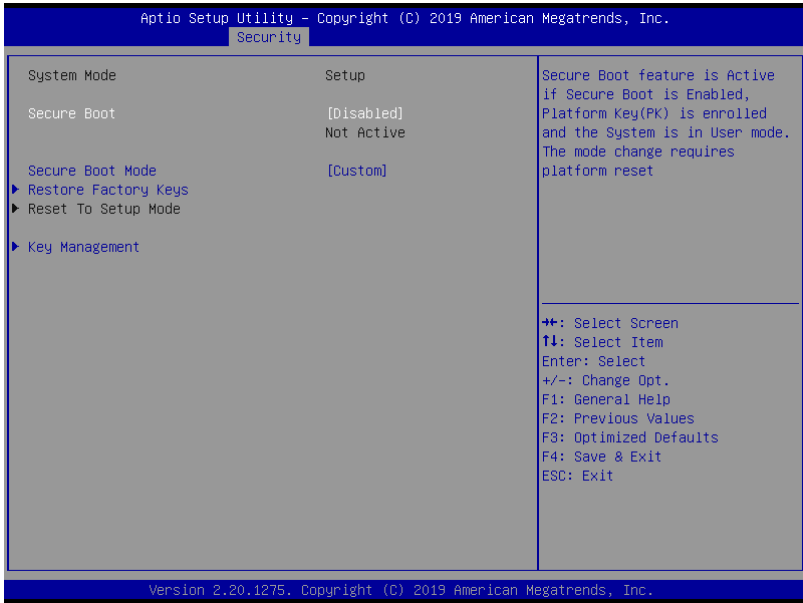

Options Summary		
Secure Boot	Disabled	Optimal Default, Failsafe Default
	Enabled	
Secure Boot feature is Active if Secure Boot is Enabled, Platform Key(PK) is enrolled and the System is in User mode. The mode change requires platform reset		
Secure Boot Mode	Custom	Optimal Default, Failsafe Default
	Standard	
Secure Boot mode options: Standard or Custom. In Custom mode, Secure Boot Policy variables can be configured by a physically present user without full authentication		
Restore Factory Keys		
Force System to User Mode. Install factory default Secure Boot key databases		
Reset To Setup Mode		
Delete all Secure Boot key databases from NVRAM		


3.6.1.1 Key Management

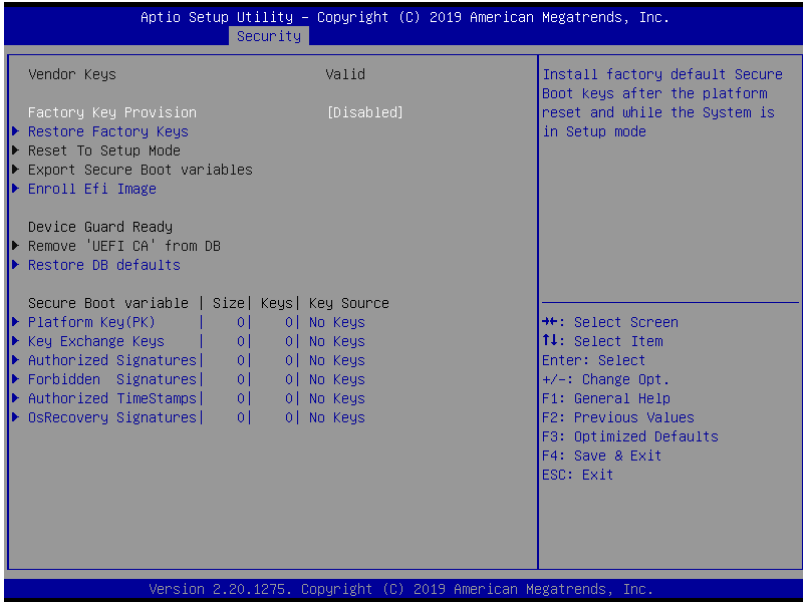

Options Summary		
Factory Key Provision	Disabled	Optimal Default, Failsafe Default
	Enabled	
Secure Boot feature is Active if Secure Boot is Enabled, Platform Key(PK) is enrolled and the System is in User mode. The mode change requires platform reset		
Restore Factory Keys		
Force System to User Mode. Install factory default Secure Boot key databases		
Reset To Setup Mode		
Delete all Secure Boot key databases from NVRAM		
Export Secure Boot variables		
Copy NVRAM content of Secure Boot variables to files in a root folder on a file system device		
Enroll Efi Image		
Allow the image to run in Secure Boot mode. Enroll SHA256 Hash certificate of a PE image into Authorized Signature Database (db)		
Remove 'UEFI CA' from DB		
Device Guard ready system must not list 'Microsoft UEFI CA' Certificate in Authorized Signature database (db)		


Options Summary		
Restore DB defaults		
Restore DB variable to factory defaults		
Platform Key (PK)	Details	
	Export	
	Update	
	Delete	
Key Exchange Keys	Details	
	Export	
	Update	
	Append	
	Delete	
Authorized Signatures	Details	
	Export	
	Update	
	Append	
	Delete	
Forbidden Signatures	Details	
	Export	
	Update	
	Append	
	Delete	
Authorized Time Stamps	Update	
	Append	
OsRecovery Signatures	Update	
	Append	
Enroll Factory Defaults or load certificates from a file: 1.Public Key Certificate: a) EFI_SIGNATURE_LIST b) EFI_CERT_X509 (DER) c) EFI_CERT_RSA2048 (bin) d) EFI_CERT_SHAXXX 2.Authenticated UEFI Variable 3.EFI PE/COFF Image (SHA256) Key Source: Factory, External, Mixed		

3.7 Setup Submenu: Boot

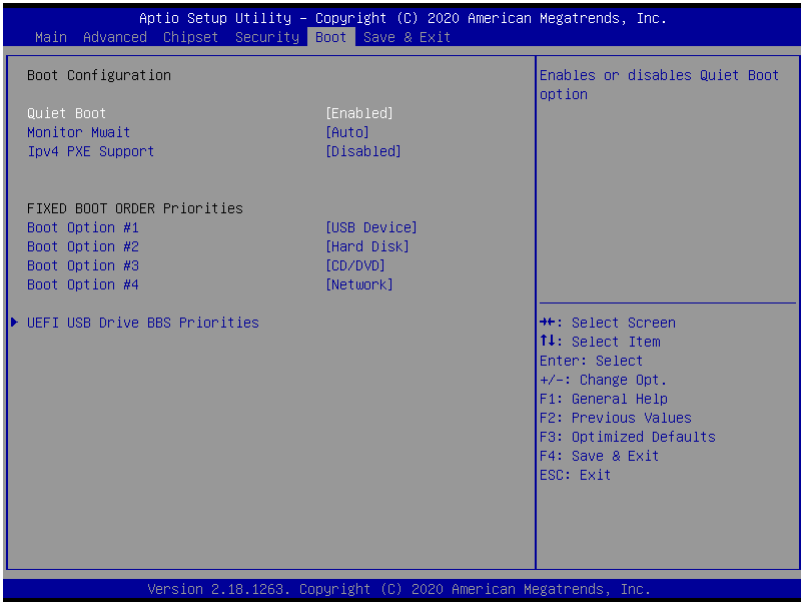


Options Summary		
Quiet Boot	Disabled	
	Enabled	Optimal Default, Failsafe Default
Enables or Disables showing boot logo.		
Monitor Mwait	Disable	
	Enabled	
	Auto	Optimal Default, Failsafe Default
Enable/Disable Monitor Mwait. To install Linux OS, please set this item to disable.		
Ipv4 PXE Support	Disabled	Optimal Default, Failsafe Default
	Enabled	
Enable Ipv4 PXE Boot Support. If disabled IPV4 PXE boot option will not be created.		

3.7.1 BBS Priorities

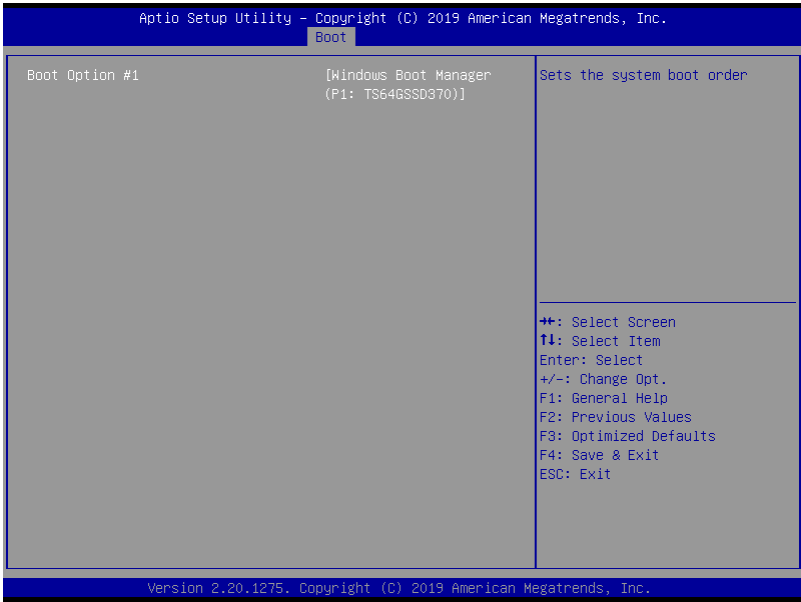

3.8 Setup Submenu: Save & Exit

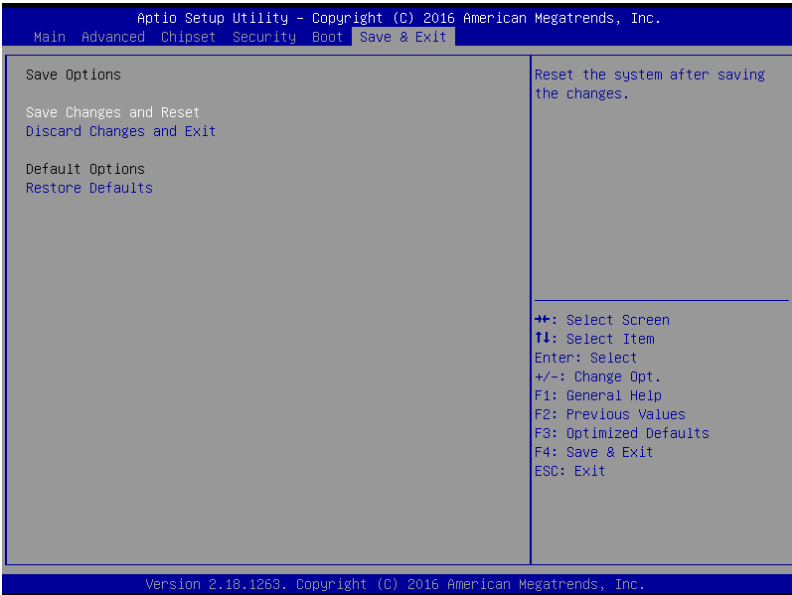

Chapter 4

Drivers Installation

4.1 Driver Download/Installation

Drivers for the PICO-APL4 can be downloaded from the product page on the AAEON website by following this link:

<https://www.aaeon.com/en/p/pico-itx-boards-pico-apl4#downloads>

Download the driver(s) you need and follow the steps below to install them.

Step 1 – Install Chipset Driver

1. Open the **STEP1 - CHIPSET** folder and open the **SetupChipset.exe** file
2. Follow the instructions
3. Drivers will be installed automatically

Step 2 – Install Graphic Driver

1. Open the **STEP2 - VGA** folder and open the **Setup.exe** file
2. Follow the instructions
3. Driver will be installed automatically

Step 3 – Install LAN Driver

1. Open the **STEP3 - LAN** folder and select your OS
2. Open the **.exe** file in the folder
3. Follow the instructions
4. Driver will be installed automatically

Step 4 – Install Audio Driver

1. Open the **STEP4 - AUDIO** folder and open the **0006-64bit_Win7_Win8_Win81_Win10_R279.exe** file
2. Follow the instructions
3. Driver will be installed automatically




















































Step 5 – Install TXE Driver

1. Open the **STEP5 - TXE** folder and open the **SetupTXE.exe** file
2. Follow the instructions
3. Driver will be installed automatically













































Appendix A

I/O Information

A.1 I/O Address Map




















































- ▼  Input/output (I/O)
 - ▼  [0000000000000000 - 000000000000006F] PCI Express Root Complex
 - >  [0000000000000020 - 0000000000000021] Programmable interrupt controller
 - >  [0000000000000024 - 0000000000000025] Programmable interrupt controller
 - >  [0000000000000028 - 0000000000000029] Programmable interrupt controller
 - >  [000000000000002C - 000000000000002D] Programmable interrupt controller
 - >  [000000000000002E - 000000000000002F] Motherboard resources
 - >  [0000000000000030 - 0000000000000031] Programmable interrupt controller
 - >  [0000000000000034 - 0000000000000035] Programmable interrupt controller
 - >  [0000000000000038 - 0000000000000039] Programmable interrupt controller
 - >  [000000000000003C - 000000000000003D] Programmable interrupt controller
 - >  [0000000000000040 - 0000000000000043] System timer
 - >  [000000000000004E - 000000000000004F] Motherboard resources
 - >  [0000000000000050 - 0000000000000053] System timer
 - >  [0000000000000060 - 0000000000000060] Standard PS/2 Keyboard
 - >  [0000000000000061 - 0000000000000061] Motherboard resources
 - >  [0000000000000063 - 0000000000000063] Motherboard resources
 - >  [0000000000000064 - 0000000000000064] Standard PS/2 Keyboard
 - >  [0000000000000065 - 0000000000000065] Motherboard resources
 - >  [0000000000000067 - 0000000000000067] Motherboard resources
 - >  [0000000000000070 - 0000000000000077] System CMOS/real time clock
 - ▼  [0000000000000078 - 0000000000000CF7] PCI Express Root Complex
 - >  [0000000000000080 - 000000000000008F] Motherboard resources
 - >  [0000000000000092 - 0000000000000092] Motherboard resources
 - >  [00000000000000A0 - 00000000000000A1] Programmable interrupt controller
 - >  [00000000000000A4 - 00000000000000A5] Programmable interrupt controller
 - >  [00000000000000A8 - 00000000000000A9] Programmable interrupt controller
 - >  [00000000000000AC - 00000000000000AD] Programmable interrupt controller
 - >  [00000000000000B0 - 00000000000000B1] Programmable interrupt controller
 - >  [00000000000000B2 - 00000000000000B3] Motherboard resources
 - >  [00000000000000B4 - 00000000000000B5] Programmable interrupt controller
 - >  [00000000000000B8 - 00000000000000B9] Programmable interrupt controller
 - >  [00000000000000BC - 00000000000000BD] Programmable interrupt controller
 - >  [00000000000000F0 - 00000000000000F0] Numeric data processor
 - >  [00000000000002E8 - 00000000000002EF] Communications Port (COM4)
 - >  [00000000000002F8 - 00000000000002FF] Communications Port (COM2)
 - >  [00000000000003E8 - 00000000000003EF] Communications Port (COM3)
 - >  [00000000000003F8 - 00000000000003FF] Communications Port (COM1)
 - >  [0000000000000400 - 000000000000047F] Motherboard resources
 - >  [00000000000004D0 - 00000000000004D1] Programmable interrupt controller
 - >  [0000000000000500 - 00000000000005FE] Motherboard resources
 - >  [0000000000000680 - 000000000000069F] Motherboard resources
 - >  [0000000000000800 - 000000000000087F] Motherboard resources
 - >  [0000000000000A00 - 0000000000000A0F] Motherboard resources
 - >  [0000000000000A10 - 0000000000000A1F] Motherboard resources
 - >  [0000000000000A20 - 0000000000000A2F] Motherboard resources
 - ▼  [0000000000000D00 - 000000000000FFFF] PCI Express Root Complex
 - >  [0000000000001854 - 0000000000001857] Motherboard resources
 - >  [000000000000D000 - 000000000000DFFF] Intel(R) Celeron(R)/Pentium(R) Processor PCI Express Root Port - 5ADB
 - >  [000000000000E000 - 000000000000EFFF] Intel(R) Celeron(R)/Pentium(R) Processor PCI Express Root Port - 5AD8
 - >  [000000000000F000 - 000000000000F03F] Intel(R) HD Graphics



















































A.2 Memory Address Map

- ▼  Memory
 -  [000000007B800001 - 000000007BFFFFFF] PCI Express Root Complex
 -  [000000007C000001 - 000000007CFFFFFF] PCI Express Root Complex
 - ▶  [0000000080000000 - 00000000CFFFFFFF] PCI Express Root Complex
 -  [00000000D0C00000 - 00000000D0C00653] Intel(R) Serial IO GPIO Host Controller - INT3452
 - ▶  [00000000D0C40000 - 00000000D0C40CEE] Unknown device
 - ▶  [00000000D0C50000 - 00000000D0C50AFE] Unknown device
 -  [00000000D0C70000 - 00000000D0C70673] Intel(R) Serial IO GPIO Host Controller - INT3452
 -  [00000000D0C80000 - 00000000D0C8082E] Unknown device
 -  [00000000D0C90000 - 00000000D0C907BE] Unknown device
 -  [00000000DE000000 - 00000000DEFFFFFF] Intel(R) HD Graphics 530
 -  [00000000DF000000 - 00000000DF0FFFFFF] PCI-to-PCI Bridge
 -  [00000000DF100000 - 00000000DF1FFFFFF] PCI-to-PCI Bridge
 -  [00000000DF220000 - 00000000DF22FFFF] High Definition Audio Controller
 -  [00000000DF230000 - 00000000DF23FFFF] Intel(R) USB 3.0 eXtensible Host Controller - 1.0 (Microsoft)
 -  [00000000DF240000 - 00000000DF243FFF] High Definition Audio Controller
 -  [00000000DF244000 - 00000000DF247FFF] PCI Memory Controller
 -  [00000000DF248000 - 00000000DF249FFF] Standard SATA AHCI Controller
 -  [00000000DF24A000 - 00000000DF24A0FF] SM Bus Controller
 -  [00000000DF24B000 - 00000000DF24B7FF] Standard SATA AHCI Controller
 -  [00000000DF24C000 - 00000000DF24C0FF] Standard SATA AHCI Controller
 -  [00000000DF24F000 - 00000000DF24FFFF] PCI Data Acquisition and Signal Processing Controller
 - ▶  [00000000E0000000 - 00000000EFFFFFFF] PCI Express Root Complex
 -  [00000000FD000000 - 00000000FDABFFFF] Motherboard resources
 -  [00000000FDAC0000 - 00000000FDACFFFF] Motherboard resources
 -  [00000000FDAD0000 - 00000000FDADFFFF] Motherboard resources
 -  [00000000FDAE0000 - 00000000FDAEFFFF] Motherboard resources
 -  [00000000FDAF0000 - 00000000FDAFFFFF] Motherboard resources
 -  [00000000FDB00000 - 00000000FDBFFFFF] Motherboard resources
 -  [00000000FE000000 - 00000000FE01FFFF] Motherboard resources
 -  [00000000FE036000 - 00000000FE03BFFF] Motherboard resources
 -  [00000000FE03D000 - 00000000FE3FFFFF] Motherboard resources
 -  [00000000FE410000 - 00000000FE7FFFFF] Motherboard resources
 -  [00000000FEA00000 - 00000000FEAFFFFF] Motherboard resources
 -  [00000000FED00000 - 00000000FED003FF] High precision event timer
 -  [00000000FED01000 - 00000000FED01FFF] Motherboard resources
 -  [00000000FED03000 - 00000000FED03FFF] Motherboard resources
 -  [00000000FED06000 - 00000000FED06FFF] Motherboard resources
 -  [00000000FED08000 - 00000000FED09FFF] Motherboard resources
 -  [00000000FED1C000 - 00000000FED1CFFF] Motherboard resources
 - ▶  [00000000FED40000 - 00000000FED44FFF] Trusted Platform Module 1.2
 -  [00000000FED80000 - 00000000FEDBFFFF] Motherboard resources
 -  [00000000FEE00000 - 00000000FEEFFFFFFF] Motherboard resources
 -  [00000000FF000000 - 00000000FFFFFFFF] Legacy device

A.3 IRQ Mapping Chart

Interrupt request (IRQ)	
(ISA) 0x00000000 (00)	System timer
(ISA) 0x00000000 (00)	System timer
(ISA) 0x00000000 (00)	System timer
(ISA) 0x00000000 (00)	System timer
(ISA) 0x00000001 (01)	Standard PS/2 Keyboard
(ISA) 0x00000003 (03)	Communications Port (COM2)
(ISA) 0x00000003 (03)	Communications Port (COM2)
(ISA) 0x00000004 (04)	Communications Port (COM1)
(ISA) 0x00000008 (08)	High precision event timer
(ISA) 0x00000008 (08)	System CMOS/real time clock
(ISA) 0x0000000A (10)	Communications Port (COM4)
(ISA) 0x0000000A (10)	PCI-to-PCI Bridge
(ISA) 0x0000000B (11)	Communications Port (COM3)
(ISA) 0x0000000B (11)	High Definition Audio Controller
(ISA) 0x0000000B (11)	Intel(R) USB 3.0 eXtensible Host Controller - 1.0 (Microsoft)
(ISA) 0x0000000B (11)	PCI Data Acquisition and Signal Processing Controller
(ISA) 0x0000000B (11)	PCI-to-PCI Bridge
(ISA) 0x0000000B (11)	SM Bus Controller
(ISA) 0x0000000B (11)	Standard SATA AHCI Controller
(ISA) 0x0000000C (12)	PS/2 Compatible Mouse
(ISA) 0x0000000D (13)	Numeric data processor
(ISA) 0x0000000E (14)	Intel(R) Serial IO GPIO Host Controller - INT3452
(ISA) 0x0000000E (14)	Intel(R) Serial IO GPIO Host Controller - INT3452
(ISA) 0x0000000E (14)	Intel(R) Serial IO GPIO Host Controller - INT3452
(ISA) 0x0000000E (14)	Intel(R) Serial IO GPIO Host Controller - INT3452
(ISA) 0x0000000E (14)	Motherboard resources
(ISA) 0x0000000E (14)	Unknown device
(ISA) 0x0000000E (14)	Unknown device
(ISA) 0x0000000E (14)	Unknown device
(ISA) 0x0000000F (15)	Unknown device
(ISA) 0x00000011 (17)	Intel(R) USB 3.0 eXtensible Host Controller - 1.0 (Microsoft)
(ISA) 0x00000011 (17)	Intel(R) USB 3.0 eXtensible Host Controller - 1.0 (Microsoft)
(ISA) 0x00000018 (24)	PCI Data Acquisition and Signal Processing Controller
(ISA) 0x00000019 (25)	High Definition Audio Controller
(ISA) 0x00000019 (25)	High Definition Audio Controller
(ISA) 0x0000001B (27)	Intel(R) Serial IO I2C Host Controller - 5AAC
(ISA) 0x0000001B (27)	Intel(R) Serial IO I2C Host Controller - 5AAC
(ISA) 0x0000001C (28)	Intel(R) Serial IO I2C Host Controller - 5AAE
(ISA) 0x0000001C (28)	Intel(R) Serial IO I2C Host Controller - 5AAE
(ISA) 0x0000001F (31)	Intel(R) Serial IO I2C Host Controller - 5AB4
(ISA) 0x0000001F (31)	Intel(R) Serial IO I2C Host Controller - 5AB4
(ISA) 0x00000027 (39)	Intel SD Host Controller
(ISA) 0x00000036 (54)	Microsoft ACPI-Compliant System
(ISA) 0x00000037 (55)	Microsoft ACPI-Compliant System
(ISA) 0x00000038 (56)	Microsoft ACPI-Compliant System
(ISA) 0x00000039 (57)	Microsoft ACPI-Compliant System
(ISA) 0x0000003A (58)	Microsoft ACPI-Compliant System
(ISA) 0x0000003B (59)	Microsoft ACPI-Compliant System
(ISA) 0x0000003C (60)	Microsoft ACPI-Compliant System
(ISA) 0x0000003D (61)	Microsoft ACPI-Compliant System

 (ISA) 0x0000003E (62)	Microsoft ACPI-Compliant System
 (ISA) 0x0000003F (63)	Microsoft ACPI-Compliant System
 (ISA) 0x00000040 (64)	Microsoft ACPI-Compliant System
 (ISA) 0x00000041 (65)	Microsoft ACPI-Compliant System
 (ISA) 0x00000042 (66)	Microsoft ACPI-Compliant System
 (ISA) 0x00000043 (67)	Microsoft ACPI-Compliant System
 (ISA) 0x00000044 (68)	Microsoft ACPI-Compliant System
 (ISA) 0x00000045 (69)	Microsoft ACPI-Compliant System
 (ISA) 0x00000046 (70)	Microsoft ACPI-Compliant System
 (ISA) 0x00000047 (71)	Microsoft ACPI-Compliant System
 (ISA) 0x00000048 (72)	Microsoft ACPI-Compliant System
 (ISA) 0x00000049 (73)	Microsoft ACPI-Compliant System
 (ISA) 0x0000004A (74)	Microsoft ACPI-Compliant System
 (ISA) 0x0000004B (75)	Microsoft ACPI-Compliant System
 (ISA) 0x0000004C (76)	Microsoft ACPI-Compliant System
 (ISA) 0x0000004D (77)	Microsoft ACPI-Compliant System
 (ISA) 0x0000004E (78)	Microsoft ACPI-Compliant System
 (ISA) 0x0000004F (79)	Microsoft ACPI-Compliant System
 (ISA) 0x00000050 (80)	Microsoft ACPI-Compliant System
 (ISA) 0x00000051 (81)	Microsoft ACPI-Compliant System
 (ISA) 0x00000052 (82)	Microsoft ACPI-Compliant System
 (ISA) 0x00000053 (83)	Microsoft ACPI-Compliant System
 (ISA) 0x00000054 (84)	Microsoft ACPI-Compliant System
 (ISA) 0x00000055 (85)	Microsoft ACPI-Compliant System
 (ISA) 0x00000056 (86)	Microsoft ACPI-Compliant System
 (ISA) 0x00000057 (87)	Microsoft ACPI-Compliant System
 (ISA) 0x00000058 (88)	Microsoft ACPI-Compliant System
 (ISA) 0x00000059 (89)	Microsoft ACPI-Compliant System
 (ISA) 0x0000005A (90)	Microsoft ACPI-Compliant System
 (ISA) 0x0000005B (91)	Microsoft ACPI-Compliant System
 (ISA) 0x0000005C (92)	Microsoft ACPI-Compliant System
 (ISA) 0x0000005D (93)	Microsoft ACPI-Compliant System
 (ISA) 0x0000005E (94)	Microsoft ACPI-Compliant System
 (ISA) 0x0000005F (95)	Microsoft ACPI-Compliant System
 (ISA) 0x00000060 (96)	Microsoft ACPI-Compliant System
 (ISA) 0x00000061 (97)	Microsoft ACPI-Compliant System
 (ISA) 0x00000062 (98)	Microsoft ACPI-Compliant System
 (ISA) 0x00000063 (99)	Microsoft ACPI-Compliant System
 (ISA) 0x00000064 (100)	Microsoft ACPI-Compliant System
 (ISA) 0x00000065 (101)	Microsoft ACPI-Compliant System
 (ISA) 0x00000066 (102)	Microsoft ACPI-Compliant System
 (ISA) 0x00000067 (103)	Microsoft ACPI-Compliant System
 (ISA) 0x00000068 (104)	Microsoft ACPI-Compliant System
 (ISA) 0x00000069 (105)	Microsoft ACPI-Compliant System
 (ISA) 0x0000006A (106)	Microsoft ACPI-Compliant System
 (ISA) 0x0000006B (107)	Microsoft ACPI-Compliant System
 (ISA) 0x0000006C (108)	Microsoft ACPI-Compliant System
 (ISA) 0x0000006D (109)	Microsoft ACPI-Compliant System
 (ISA) 0x0000006E (110)	Microsoft ACPI-Compliant System
 (ISA) 0x0000006F (111)	Microsoft ACPI-Compliant System
 (ISA) 0x00000070 (112)	Microsoft ACPI-Compliant System

	(ISA) 0x000001DC (476)	Microsoft ACPI-Compliant System
	(ISA) 0x000001DD (477)	Microsoft ACPI-Compliant System
	(ISA) 0x000001DE (478)	Microsoft ACPI-Compliant System
	(ISA) 0x000001DF (479)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E0 (480)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E1 (481)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E2 (482)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E3 (483)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E4 (484)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E5 (485)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E6 (486)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E7 (487)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E8 (488)	Microsoft ACPI-Compliant System
	(ISA) 0x000001E9 (489)	Microsoft ACPI-Compliant System
	(ISA) 0x000001EA (490)	Microsoft ACPI-Compliant System
	(ISA) 0x000001EB (491)	Microsoft ACPI-Compliant System
	(ISA) 0x000001EC (492)	Microsoft ACPI-Compliant System
	(ISA) 0x000001ED (493)	Microsoft ACPI-Compliant System
	(ISA) 0x000001EE (494)	Microsoft ACPI-Compliant System
	(ISA) 0x000001EF (495)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F0 (496)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F1 (497)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F2 (498)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F3 (499)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F4 (500)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F5 (501)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F6 (502)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F7 (503)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F8 (504)	Microsoft ACPI-Compliant System
	(ISA) 0x000001F9 (505)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FA (506)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FB (507)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FC (508)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FD (509)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FE (510)	Microsoft ACPI-Compliant System
	(ISA) 0x000001FF (511)	Microsoft ACPI-Compliant System
	(PCI) 0x00000019 (25)	High Definition Audio Controller
	(PCI) 0x00000027 (39)	Intel SD Host Controller
	(PCI) 0xFFFFFFF3 (-13)	Intel(R) HD Graphics
	(PCI) 0xFFFFFFF4 (-12)	Realtek PCIe GBE Family Controller #4
	(PCI) 0xFFFFFFF5 (-11)	Intel(R) USB 3.0 eXtensible Host Controller - 1.0 (Microsoft)
	(PCI) 0xFFFFFFF6 (-10)	Realtek PCIe GBE Family Controller #2
	(PCI) 0xFFFFFFF7 (-9)	Intel(R) Trusted Execution Engine Interface
	(PCI) 0xFFFFFFF8 (-8)	Standard SATA AHCI Controller
	(PCI) 0xFFFFFFF9 (-7)	Intel(R) Celeron(R)/Pentium(R) Processor PCI Express Root Port - 5AD7
	(PCI) 0xFFFFFFFA (-6)	Intel(R) Celeron(R)/Pentium(R) Processor PCI Express Root Port - 5AD6
	(PCI) 0xFFFFFFFB (-5)	Intel(R) Celeron(R)/Pentium(R) Processor PCI Express Root Port - 5ADA
	(PCI) 0xFFFFFFFC (-4)	Intel(R) Celeron(R)/Pentium(R) Processor PCI Express Root Port - 5AD9
	(PCI) 0xFFFFFFFD (-3)	Intel(R) Celeron(R)/Pentium(R) Processor PCI Express Root Port - 5ADB
	(PCI) 0xFFFFFFE (-2)	Intel(R) Celeron(R)/Pentium(R) Processor PCI Express Root Port - 5AD8

Appendix B

Mating Connectors

B.1 List of Mating Connectors and Cables

The table notes mating connectors and available cables.

Connector Label	Function	Mating Connector		Available Cable	Cable P/N
		Vendor	Model no		
CN1	COM Port #2 Connector	JST	SHR-09V-S-B	Serial Port Cable	1701090122
CN2	COM Port #1 Connector	JST	SHR-09V-S-B	Serial Port Cable	1701090122
CN3	Front Panel Connector	ACES	50247-010H0H0-001	Front Panel Cable	1709100108
CN7	Digital I/O Connector	Harwin	M50-3000345	N/A	N/A
CN8	SATA Connector	Molex	887505318	SATA Cable	1709070500
CN10	+5Vout Connector	JST	PHR-2	2 Pins for SATA HDD Power	1702150155
CN12	External RTC Connector	Molex	51021-0200	Battery Cable	175011301C
CN17	Power Input Connector	Molex	19211-0003	Power Cable	170204010R
CN19	Embedded DisplayPort Connector	KEL	SSL20-30S	N/A	170430030W Suggest eDP Panel: G101UAN01.0
CN20	USB Port #2 Connector	Molex	51021-0400	USB Cable	1700040151
CN21	USB Port #1 Connector	Molex	51021-0400	USB Cable	1700040151
CN22	LPC Connector	JST	SHR-12V-S-B	AAEON LPC Cable	1703120130