



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A04042905
Report No.:EMCA04042905
Page:1 of 51
Date:May 31, 2004

Product Name: SubCompact Board
Model No.: GENE-6350
Applicant: AAEON TECHNOLOGY INC.
5F, NO. 135, LANE 235, PAO CHIAO RD., HSIN-TIEN CITY,
TAIPEI, TAIWAN, R.O.C.

Date of Receipt: Apr. 29, 2004

Finished date of Test: May 31, 2004

Applicable Standards:

Emission

EN 55011:1998+A1:1999+A2:2002 Group 1 Class B
EN 55022:1998+A1:2000+A2:2003, Class B
EN 61000-3-2 edition 2:2000
EN 61000-3-3:1995+A1:2001

Immunity

EN 61000-6-1:2001
EN55024:1998+A1:2001+A2:2003
- IEC 61000-4-2:1995+A1:1998+A2:2001
- IEC 61000-4-3:2002+A1:2002
- ENV 50204:1995
- IEC 61000-4-4:1995+A1:2001+A2:2001
- IEC 61000-4-5:1995+A1:2001
- IEC 61000-4-6:1996+A1:2001
- IEC 61000-4-8:1993+A1:2001
- IEC 61000-4-11:1994+A1:2001

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Checked By : Sunyou Chen , Date: 5/31/2004
(Sunyou Chen)

Approved By : JH , Date: 5/31/2004
(Johnson Ho, Director)



Lab Code: 200099-0



Table of Contents

1. DOCUMENT POLICY AND TEST STATEMENT	5
1.1 DOCUMENT POLICY	5
1.2 TEST STATEMENT	5
1.3 EUT MODIFICATION	5
2. DESCRIPTION OF EUT AND TEST MODE	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF EUT INTERNAL DEVICE	6
2.3 DESCRIPTION OF TEST MODE	6
3. DESCRIPTION OF APPLIED STANDARDS	7
4. EMISSION TEST.....	8
4.1 CONDUCTED EMISSION TEST FOR MAIN PORT	8
4.1.1 CONDUCTED EMISSION LIMIT	8
4.1.2 TEST EQUIPMENT.....	8
4.1.3 TEST SETUP	9
4.1.4 TEST PROCEDURE	9
4.1.5 DESCRIPTION OF SUPPORT UNIT	10
4.1.6 EUT OPERATING CONDITION.....	10
4.1.7 TEST RESULT	11
4.2 RADIATED EMISSION TEST	12
4.2.1 RADIATED EMISSION LIMIT	12
4.2.2 TEST EQUIPMENT.....	12
4.2.3 TEST SET-UP	13
4.2.4 TEST PROCEDURE	13
4.2.5 DESCRIPTION OF SUPPORT UNIT	14
4.2.6 EUT OPERATING CONDITION.....	14
4.2.7 TEST RESULT	15
4.3 CURRENT HARMONICS TEST.....	16
4.3.1 LIMIT FOR CLASS A EQUIPMENT	16
4.3.2 TEST EQUIPMENT.....	17
4.3.3 TEST SETUP	17
4.3.4 TEST PROCEDURE	17
4.3.5 DESCRIPTION OF SUPPORT UNIT	17
4.3.6 EUT OPERATING CONDITION.....	17
4.3.7 TEST RESULT	18
4.4 VOLTAGE FLUCTUATIONS.....	19
4.4.1 LIMIT.....	19
4.4.2 TEST EQUIPMENT.....	19
4.4.3 TEST PROCEDURE	19
4.4.4 TEST SETUP	20
4.4.5 DESCRIPTION OF SUPPORT UNIT	20
4.4.6 EUT OPERATING CONDITION.....	20
4.4.7 TEST RESULT	21
5. ELECTROSTATIC DISCHARGE IMMUNITY TEST.....	22
5.1 TEST EQUIPMENT	22



5.2	TEST PROCEDURE	22
5.3	TEST SET-UP	23
5.4	DESCRIPTION OF SUPPORT UNIT	24
5.5	EUT OPERATING CONDITION	24
5.6	TEST CONDITION AND PERFORMANCE CRITERION.....	24
5.7	SUMMARY OF TEST RESULT	25
6.	RADIATED IMMUNITY TEST	26
6.1	TEST EQUIPMENT	26
6.2	TEST PROCEDURE	26
6.3	TEST SETUP	27
6.4	DESCRIPTION OF SUPPORT UNIT	28
6.5	EUT OPERATING CONDITION	28
6.6	TEST CONDITION / PERFORMANCE CRITERIA	28
6.7	TEST RESULT	28
7.	RADIATED IMMUNITY TEST	29
7.1	TEST EQUIPMENT	29
7.2	TEST PROCEDURE	29
7.3	TEST SETUP	30
7.4	DESCRIPTION OF SUPPORT UNIT	31
7.5	EUT OPERATING CONDITION	31
7.6	TEST CONDITION / PERFORMANCE CRITERIA	31
7.7	TEST RESULT	31
8.	ELECTRICAL FAST TRANSIENT / BURST IMMUNITY TEST.....	32
8.1	TEST EQUIPMENT	32
7.2	TEST PROCEDURE	32
8.3	TEST SET-UP	33
8.4	DESCRIPTION OF SUPPORT UNIT	33
8.5	EUT OPERATING CONDITION	33
8.6	TEST CONDITION / PERFORMANCE CRITERIA	34
8.7	SUMMARY OF TEST RESULT	34
9.	SURGE TEST (POWER LINE)	35
9.1	TEST EQUIPMENT	35
9.2	TEST PROCEDURE	35
9.3	TEST SET-UP	35
9.4	DESCRIPTION OF SUPPORT UNIT	35
9.5	EUT OPERATING CONDITION	35
9.6	TEST CONDITION / PERFORMANCE CRITERIA	36
9.7	SUMMARY OF TEST RESULT	36
10.	INDUCED RF FIELDS (CONDUCTED SUSCEPTIBILITY) TEST	37
10.1	TEST EQUIPMENT	37
10.2	TEST PROCEDURE	37
10.3	TEST SET-UP	38
10.4	DESCRIPTION OF SUPPORT UNIT	38
10.5	EUT OPERATING CONDITION	38



10.6	TEST CONDITION / PERFORMANCE CRITERIA	39
10.7	SUMMARY OF TEST RESULT	39
11.	POWER FREQUENCY MAGNETIC -FIELD TEST	40
11.1	TEST EQUIPMENT	40
11.2	TEST PROCEDURE	40
11.3	TEST SET-UP	40
11.4	DESCRIPTION OF SUPPORT UNIT	40
11.5	EUT OPERATING CONDITION	41
11.6	TEST CONDITION / PERFORMANCE CRITERIA	41
11.7	SUMMARY OF TEST RESULT	41
12.	VOLTAGE DIPS, INTERRUPTS, VARIATIONS TEST.....	42
12.1	TEST EQUIPMENT	42
12.2	TEST PROCEDURE	42
12.3	TEST SET-UP	42
12.4	DESCRIPTION OF SUPPORT UNIT	42
12.5	EUT OPERATING CONDITION	42
12.6	TEST CONDITION / PERFORMANCE CRITERIA	43
12.7	SUMMARY OF TEST RESULT	43
13.	PHOTOS OF TESTING	44
14.	TERMS OF ABRIVATION.....	51



1. DOCUMENT POLICY AND TEST STATEMENT

1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.
- The report must not be used by the applicant to claim that the product is endorsed by NVLAP, TÜV, NEMKO and SRT.
- The NVLAP logo applies only to the applicable standards specified in this report.

1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- AC power source, 230 VAC/50 Hz, was used during the test.
- The EN 61000-3-2 edition 2:2000(Harmonic test) and EN 61000-3-3:1995+A1:2001 (Flicker test) are not included in the scope of NVLAP logo usage.
- The EN 61000-3-2 edition 2:2000(Harmonic test) and EN 61000-3-3:1995+A1:2001 (Flicker test) are included in the scope of TÜV, NEMKO and SRT logo usage.

1.3 EUT MODIFICATION

- No modification in SRT Lab.



2. DESCRIPTION OF EUT AND TEST MODE

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	SubCompact Board
MODEL NO.	GENE-6350
POWER SUPPLY	DC from PC
CABLE	N/A

NOTE :

The EUT has four serial no. on market. They are identical in all aspects except for the following:

Serial No.	Celeron 400	Celeron 650	TV	DVI
GENE-6350-A10				
GENE-6350-A10-01				
GENE-6350-A10-02				
GENE-6350-A10-03				

The CPU: Celeron 650 was chosen as the representative for testing.

There was no test for TV and DVI function by SRT Lab.

For more detailed information, please refer to the EUT' s specification or user' s manual provided by manufacturer.

2.2 DESCRIPTION OF EUT INTERNAL DEVICE

DEVICE	BRAND / MAKER	MODEL #	REMARK
N/A			

NOTE :

1. The EUT was installed into a PC enclosure
2. The CPU installed on EUT is Intel Celeron 650MHz, clock chip is 100MHz.
3. Frequency range to be measured.
Radiated emission is 30MHz to 1GHz.

2.3 DESCRIPTION OF TEST MODE

The EUT was pre-tested under the following video resolution:

640x480, 1024x768 and 1280x1024

The worst emission was found under 1280x1024 and therefore the test data of only this mode is recorded.



3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of ITE interface device and according to the specifications provided by the applicant, it must comply with the requirements of the following standards:

EN 55011:1998+A1:1999+A2:2002 Group 1 Class B

EN 55022:1998+A1:2000+A2:2003, Class B

EN 61000-3-2 edition 2:2000

EN 61000-3-3:1995+A1:2001

EN 61000-6-1:2001

EN 55024:1998+A1:2001+A2:2003

- IEC 61000-4-2:1995+A1:1998+A2:2001

- IEC 61000-4-3:2002+A1:2002

- ENV 50204:1995

- IEC 61000-4-4:1995+A1:2001+A2:2001

- IEC 61000-4-5:1995+A1:2001

- IEC 61000-4-6:1996+A1:2001

- IEC 61000-4-8:1993+A1:2001

- IEC 61000-4-11:1994+A1:2001

All tests have been performed and recorded as the above standards.



4. EMISSION TEST

4.1 CONDUCTED EMISSION TEST FOR MAIN PORT

4.1.1 CONDUCTED EMISSION LIMIT

FREQUENCY (MHz)	Class A (dBmV)		Class B (dBmV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.5 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST EQUIPMENT


The following test equipment was used for the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 2750 MHz	ROHDE & SCHWARZ	ESCS30/ 830245/012	AUG. 2004 ETC
LISN (for EUT)	50 μ H, 50 ohm	SOLAR ELECTRONICS	8012-50-R-24-BNC / 924839	JUN. 2004 ETC
LISN (for Peripheral)	50 μ H, 50 ohm	SOLAR ELECTRONICS	9252-50-R-24-BNC / 951318	JUN. 2004 ETC
50 ohm TERMINATOR	50 ohm	HP	11593A/ 2	MAR. 2005 ETC
COAXIAL CABLE	3m	SUNCITY	J400/ 3M	JUL. 2004 SRT
ISOLATION TRANSFORMER	N/A	APC	AFC-11015/ F102040016	N/A
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 771	N/A
GROUND PLANE	2.3M (H) x 2.4M (W)	SRT	N/A	N/A
GROUND PLANE	2.4M (H) x 2.4M (W)	SRT	N/A	N/A

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.



4.1.3 TEST SETUP

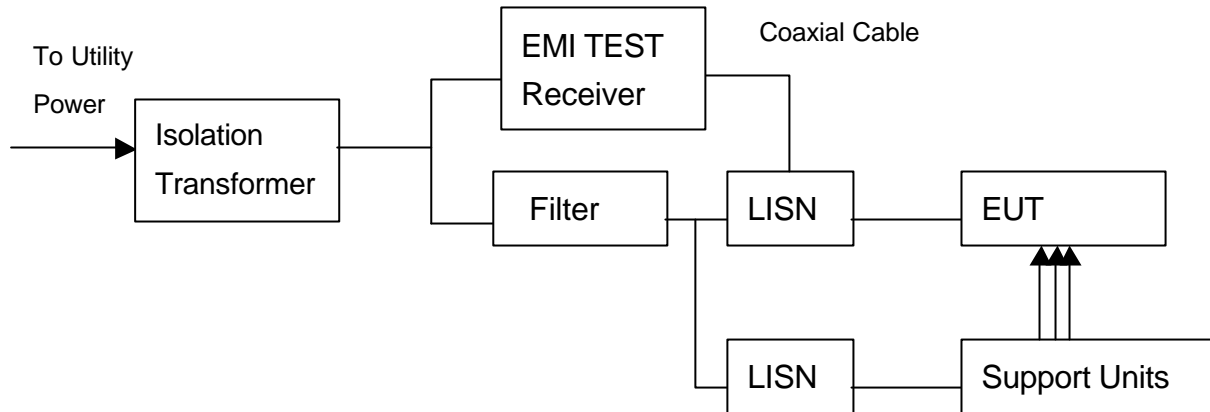

NOTE:

1. The EUT was put on a wooden table with 0.8m height above ground plane, and 0.4m away from reference ground plane (> 2mx2m).
2. For the actual test configuration, please refer to the photos of testing.
3. The serial no. of the LISN connected to EUT is 951318.
4. The serial no. of the LISN connected to support units is 924839.

4.1.4 TEST PROCEDURE

The EUT was tested according to the requirement of EN 55011:1998+A1:1999+A2:2002 Group 1 Class B and EN 55022:1998+A1:2000+A2:2003. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 Ω /50 μ H as specified. All readings were quasi-peak and average values with 10 kHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. Both lines of the power mains of EUT were measured and the cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.



4.1.5 DESCRIPTION OF SUPPORT UNIT

The EUT was configured by the requirement of EN 55011:1998+A1:1999+A2:2002 Group 1 Class B and EN 55022:1998+A1:2000+A2:2003. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NO	DEVICE	BRAND	MODEL #	CABLE
1	MONITOR	SAMSUNG	PG17IS	1.5m unshielded power cord 1.2m shielded data cable
2	PRINTER	EPSON	STYLUS C20SX	1.5m unshielded power cord 1.5m shielded data cable
3	MODEM	ACEEX	DM-1414	1.8m unshielded DC power cable 1.5m shielded data cable
4	KEYBOARD	ACER	6311-TA	1.5m shielded data cable
5	MOUSE	LOGITECH	M-S34	1.5m shielded data cable
6	USB MOUSE	HP	MO19UCA	1.5m shielded data cable
7	COM MOUSE	LOGITECH	M-M30	1.5m unshielded data cable
8	SPEAKER	JS	J-205A	1.5m unshielded power cord 1.5m unshielded data cable
9	MIC	TAKY	UDM-606	1.8m unshielded data cable
10	WALKMAN	AIWA	HS-P102	1.2m unshielded data cable
11	ADAPTER	EDAC	EA1050A-120	1.5m unshielded power cable

NOTE: For the actual test configuration, please refer to the photos of testing.

4.1.6 EUT OPERATING CONDITION

1. Under Windows 2000 ran "EMITEST", "WINFCC" and "MEDIA PLAYER" programs.
2. EUT sent "H" pattern or accessed the following peripherals directly:
 - Color Monitor
 - RS232
 - Keyboard
 - Mouse
 - Printer
 - FDD
 - HDD
3. Accessed data from internet.



4.1.7 TEST RESULT

Temperature:	25 °C	Humidity:	58 %RH
Ferquency Range:	0.15 – 30 MHz	Tested Mode:	N/A
Receiver Detector:	Q.P. and AV.	Tested Date:	May 24, 2004
Tested By:	Tom Lin		

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBmV)		Emission Level (dBmV)		Limit (dBmV)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.180	0.30	49.4	37.4	49.7	37.7	64.5	54.5	-14.7	-16.8
0.183	0.30	49.6	37.5	49.9	37.8	64.3	54.3	-14.5	-16.5
3.269	0.23	36.4	29.1	36.6	29.3	56.0	46.0	-19.4	-16.7
3.388	0.24	41.2	32.2	41.5	32.5	56.0	46.0	-14.5	-13.5
7.436	0.37	38.2	34.5	38.6	34.8	60.0	50.0	-21.4	-15.2
25.004	0.83	39.5	39.5	40.4	40.4	60.0	50.0	-19.6	-9.6

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dBmV)		Emission Level (dBmV)		Limit (dBmV)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.180	0.30	49.7	37.5	50.0	37.8	64.5	54.5	-14.5	-16.7
0.183	0.30	49.4	37.2	49.7	37.5	64.3	54.3	-14.7	-16.8
1.028	0.15	30.7	27.3	30.9	27.4	56.0	46.0	-25.1	-18.6
4.408	0.20	30.5	21.9	30.7	22.1	56.0	46.0	-25.3	-23.9
7.365	0.32	37.4	34.2	37.7	34.5	60.0	50.0	-22.3	-15.5
25.004	0.83	39.5	39.4	40.4	40.3	60.0	50.0	-19.6	-9.7

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	<h1>TEST REPORT</h1>	Reference No.:A04042905 Report No.:EMCA04042905 Page:12 of 51 Date:May 31, 2004
--	----------------------	--

4.2 RADIATED EMISSION TEST

4.2.1 RADIATED EMISSION LIMIT

EN 55011:1998+A1:1999+A2:2002 Group 1 Class B and EN 55022:1998+A1:2000 +A2:2003 limits of radiated emission measurement for frequency below 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBmV/m	dBmV/m
30 – 230	40	30
230 - 1000	47	37

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m).

4.2.2 TEST EQUIPMENT


The following test equipment was used during the radiated emission test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	20 MHz TO 1000 MHz	ROHDE & SCHWARZ	ESVS30/ 841997/003	AUG. 2004 ETC
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3142/ 9701-1124	APR. 2005 SRT
OATS	3 – 10 M MEASUREMENT	SRT	SRT-1	APR. 2005 SRT
COAXIAL CABLE	25M	SUNCITY	J400/ 25M	AUG. 2004 SRT
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 869	N/A
FREQUENCY CONVERTER	N/A	APC	AFC-2KBB/ F100030031	AUG. 2004 SRT

NOTE:

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.
2. The Open Area Test Site (SRT-1) is registered by FCC with No. 90957 and VCCI with No. R-1081.
3. The Open Area Test Site (SRT-2) is registered by FCC with No. 98458 and VCCI with No. R-1168.

4.2.3 TEST SET-UP

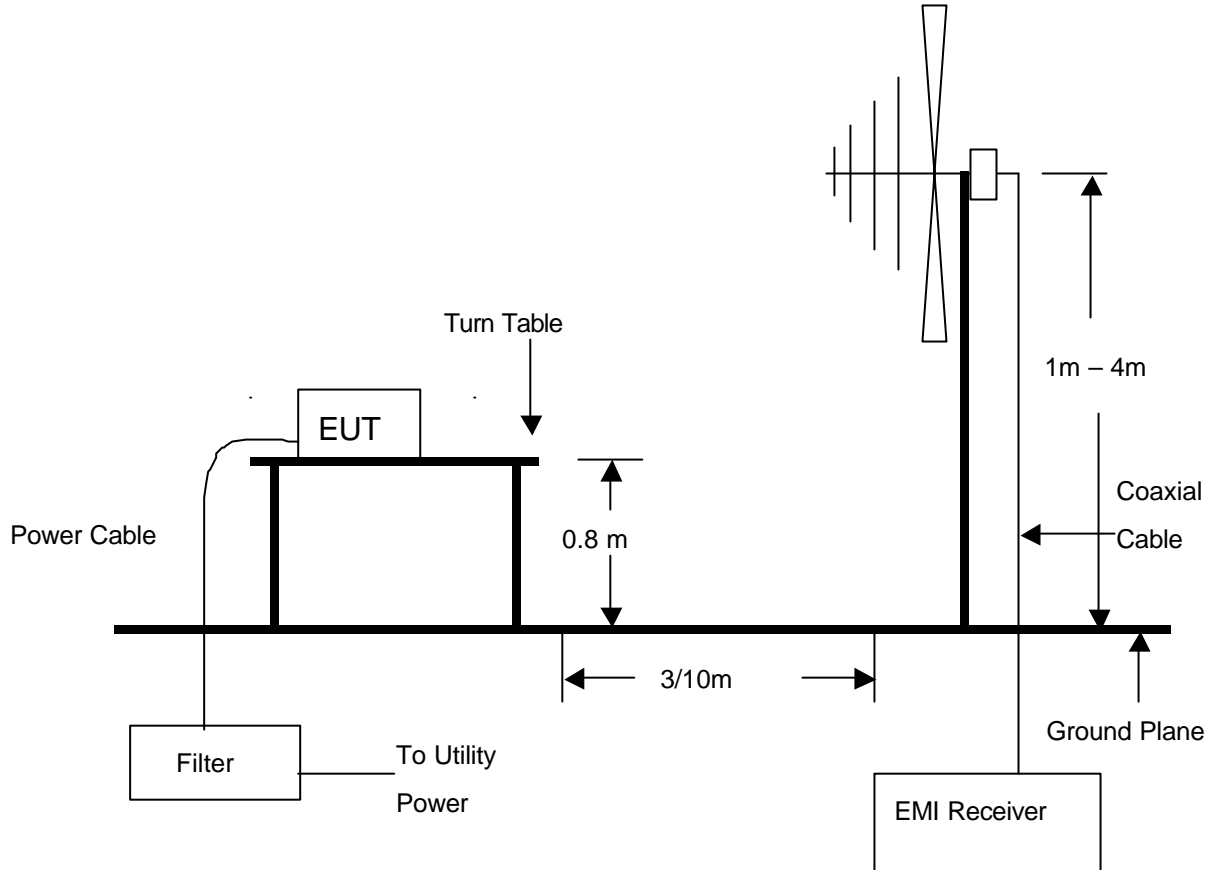

NOTE:

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.

4.2.4 TEST PROCEDURE

The EUT was tested according to the requirement of EN 55011:1998+A1:1999+A2:2002 Group 1 Class B and EN 55022:1998+A1:2000+A2:2003. The measurements were made at an open area test site with 10 meter measurement distance. The frequency spectrum measured from 30 MHz to 1 GHz. All readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A04042905
Report No.:EMCA04042905
Page:14 of 51
Date:May 31, 2004

4.2.5 DESCRIPTION OF SUPPORT UNIT

Same as section 4.1.5 of this report.

4.2.6 EUT OPERATING CONDITION

Same as section 4.1.6 of this report.



4.2.7 TEST RESULT

Temperature:	26 °C	Humidity:	58 %RH
Ferquency Range:	30 – 1000 MHz	Measured Distance:	10m
Receiver Detector:	Q.P.	Tested Mode:	N/A
Tested By:	Tom Lin	Tested Date:	May 24, 2004

Antenna Polarization:Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	AZ(°)	EL(m)
33.6460	0.63	9.57	15.4	25.6	30.0	-4.4	256.6	4.00
66.5248	0.89	5.02	19.2	25.1	30.0	-4.9	96.6	4.00
133.1010	1.21	7.81	15.5	24.5	30.0	-5.5	125.5	4.00
199.6347	1.51	9.35	15.9	26.8	30.0	-3.2	56.6	4.00
370.1210	2.19	15.56	15.2	32.9	37.0	-4.1	236.6	4.00
798.2340	3.38	21.39	7.1	31.9	37.0	-5.1	222.2	1.51

Antenna Polarization:Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	AZ(°)	EL(m)
33.6460	0.63	9.57	16.7	26.9	30.0	-3.1	12.5	1.31
98.3146	1.08	5.68	19.4	26.2	30.0	-3.8	22.2	1.00
133.1010	1.21	7.81	18.5	27.5	30.0	-2.5	36.6	1.35
199.6347	1.51	9.35	14.8	25.7	30.0	-4.3	96.6	1.45
370.1210	2.19	15.56	15.7	33.4	37.0	-3.6	325.5	1.21
931.4760	3.95	23.17	5.4	32.5	37.0	-4.5	322.2	1.20

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.



4.3 CURRENT HARMONICS TEST

4.3.1 LIMIT

For Class A Equipment

EVEN HARMONICS		ODD HARMONICS	
HARMONICS ORDER	LIMIT (Amp.)	HARMONICS ORDER	LIMIT (Amp.)
2	1.08	3	2.30
4	0.43	5	1.14
6	0.30	7	0.77
8 < n < 40	0.23 x 8 / n	9	0.40
		11	0.33
		13	0.21
		15 < n < 39	0.15 x 8 / n

For Class D Equipment

Harmonics Order n	Max. permissible harmonics current per watt (mA/W)	Max. permissible harmonics current (A)
Odd Harmonics only		
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
13	0.30	0.21
15 n 39	3.85 / n	0.15 x 15 / n

NOTE:

1. Class A and Class D are judged by test equipment automatically as per Section 5 of EN 61000-3-2 edition 2:2000.
2. The above limits for Class D equipment are for all applications having an active input power > 75 W. No limits apply for equipment with an active input power up to and including 75 W.


 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	<h1>TEST REPORT</h1>	Reference No.:A04042905 Report No.:EMCA04042905 Page:17 of 51 Date:May 31, 2004
--	----------------------	--

4.3.2 TEST EQUIPMENT

EQUIPMENT / FACILITIES	MANUFACTURER	MODEL # /	DUE DATE OF CAL. & CAL. CENTER
MAIN UNIT	HP	6842A/ 3734A00212	APR. 2005 PRECISION

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST SETUP

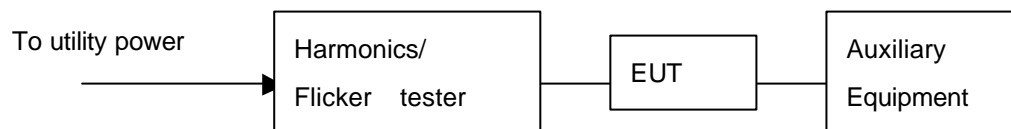

NOTE :

1. The EUT system was put on a wooden table with 0.8m high.
2. For the actual test configuration, please refer to the photos of testing.

4.3.4 TEST PROCEDURE

According to EN61000-3-2 edition 2:2000

4.3.5 DESCRIPTION OF SUPPORT UNIT

Same as section 4.1.5 of this report.

4.3.6 EUT OPERATING CONDITION

Same as section 4.1.6 of this report.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A04042905
Report No.:EMCA04042905
Page:18 of 51
Date:May 31, 2004

4.3.7 TEST RESULT

Temperature:	<u>25 °C</u>	Humidity:	<u>58 % RH</u>
Fundamental Current:	<u>0.077A</u>	Max. Power	<u></u>
Voltage:	<u>225.6Vrms</u>	Consumption:	<u>16.1W</u>
Power Factor:	<u>0.369</u>	Tested Mode:	<u>N/A</u>
Tested By:	<u>Tom Lin</u>	Tested Date:	<u>May 24, 2004</u>

Maximum Reading Data:

Odd Harm. Order	Reading Data (A)	Limit (A)	Test Result
17	0.0430	0.1324	PASS



4.4 VOLTAGE FLUCTUATIONS

4.4.1 LIMIT

Short-term flicker (P_{st}) : 1.0

Long-term flicker (P_{lt}) : 0.65

Relative steady-state voltage change (D_c) : 3%

Relative voltage change characteristic ($D(t) > 3%$) ; ($T_{D(t)}$) : 200 ms

Maximum relative voltage change (D_{max}) : 4%

TEST ITEM	LIMIT	NOTE
P_{st}	1.0	P_{st} means short-term flicker indicator.
P_{lt}	0.65	P_{lt} means long-term flicker indicator.
$T_{D(t)}$ (ms)	200	$T_{D(t)}$ means maximum time that $D(t)$ exceeds 3 %.
D_{max} (%)	4%	D_{max} means maximum relative voltage change.
D_c (%)	3%	D_c means relative steady-state voltage change

4.4.2 TEST EQUIPMENT

EQUIPMENT / FACILITIES	MANUFACTURER	MODEL # /	DUE DATE OF CAL. & CAL. CENTER
MAIN UNIT	HP	6842A/ 3734A00212	APR. 2005 PRECISION


NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURE

According to EN 61000-3-3:1995+A1:2001



4.4.4 TEST SETUP

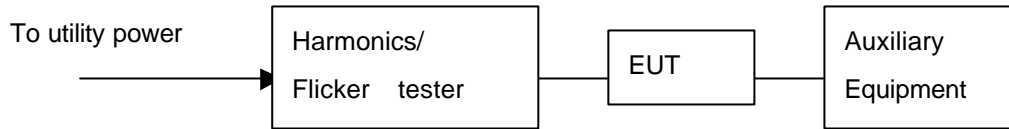

- NOTE :**
1. The EUT system was put on a wooden table with 0.8m high.
 2. For the actual test configuration, please refer to the photos of testing.

4.4.5 DESCRIPTION OF SUPPORT UNIT

Same as section 4.1.5 of this report.

4.4.6 EUT OPERATING CONDITION

Same as section 4.1.6 of this report.



4.4.7 TEST RESULT

Temperature:	<u>25° C</u>	Humidity:	<u>58% RH</u>
Input Voltage:	<u>225.6Vrms</u>	Observation	
Ampere:	<u>0.2 Arms</u>	Period:	<u>1Hr</u>
Power Factor:	<u>0.392</u>	Tested Mode:	<u>N/A</u>
Tested By:	<u>Tom Lin</u>	Tested Date:	<u>May 24, 2004</u>

Test Result:

TEST PARAMETER	MEASUREMENT VALUE	LIMIT	TEST RESULT
P_{st}	0.07	1.0	PASS
P_{lt}	0.07	0.65	PASS
$T_{D(t)}$ (ms)	0	200	PASS
D_{max} (%)	0	4%	PASS
D_c (%)	0	3%	PASS

NOTE:

1. P_{st} means short-term flicker indicator.
2. P_{lt} means long-term flicker indicator.
3. $T_{D(t)}$ means maximum time that $D(t)$ exceeds 3 %.
4. D_{max} means maximum relative voltage change.
5. D_c means relative steady-state voltage change.
6. N/A: Not applicable.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	<h1>TEST REPORT</h1>	Reference No.:A04042905 Report No.:EMCA04042905 Page:22 of 51 Date:May 31, 2004
--	----------------------	--

5. ELECTROSTATIC DISCHARGE IMMUNITY TEST

5.1 TEST EQUIPMENT


EQUIPMENT / FACILITIES	MANUFACTURER	MODEL # / SERIAL #	DUE DATE OF CAL. & CAL. CENTER
ESD SIMULATOR	NOISEKEN	ESS-100L(A)/TC-815P/ 8099C02238/7099C02	NOV. 2004 ETC
HCP (1.6M x 0.8M)	SRT	WITH TWO 470k OHM CABLE	N/A
VCP (0.5M x 0.5M)	SRT	WITH TWO 470k OHM CABLE	N/A
GROUND PLANE (3.4M x 2.4M)	SRT	N/A	N/A

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

5.2 TEST PROCEDURE

According to IEC/EN 61000-4-2:1995+A1:1998+A2:2001

5.3 TEST SET-UP

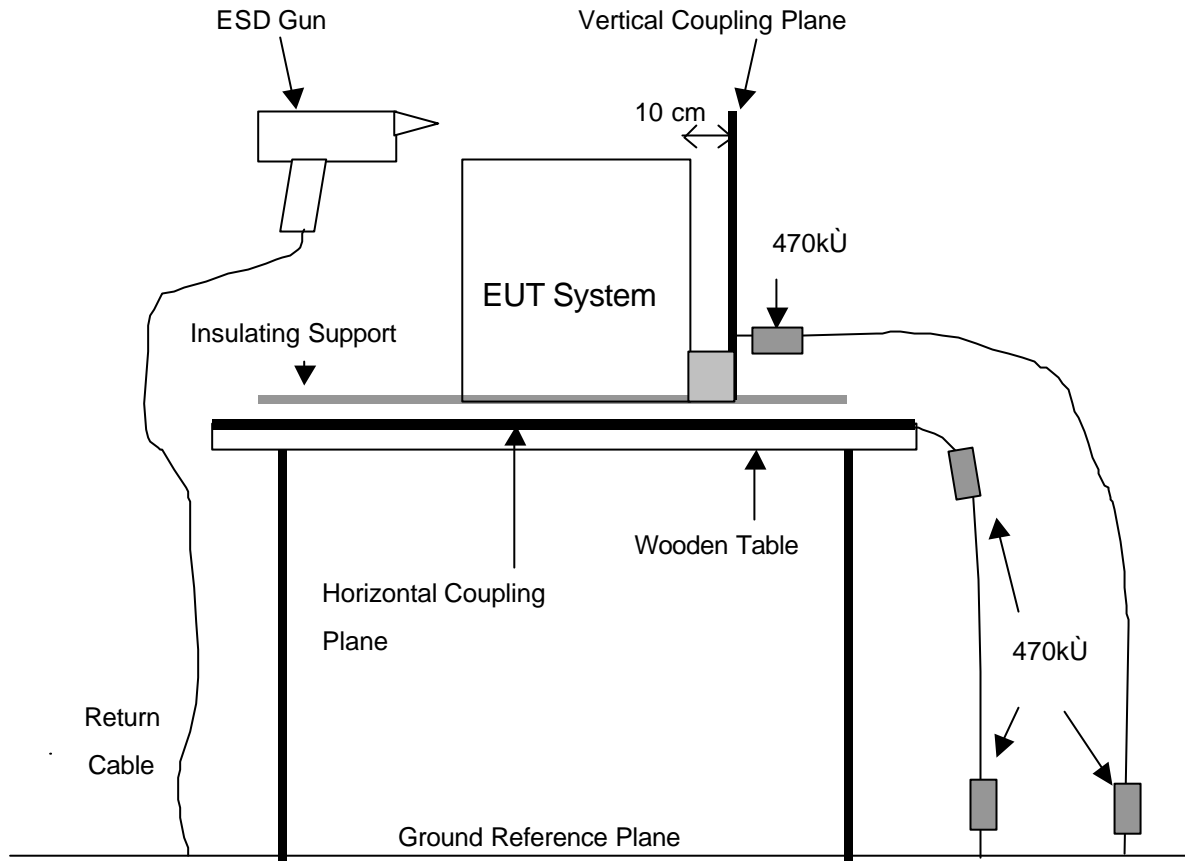

NOTE :

1. The wooden table should be 0.8m high for table top EUT and 0.1m for floor-standing EUT.
2. For the actual test configuration, please refer to the photos of testing.
3. A distance of 1m minimum was provided between EUT and walls / other metallic structure.



5.4 DESCRIPTION OF SUPPORT UNIT

Same as section 4.1.5 of this report.

5.5 EUT OPERATING CONDITION

Same as section 4.1.6 of this report.

5.6 TEST CONDITION AND PERFORMANCE CRITERION

1. Test condition

- (1) R-C Network : 330 Ω, 150 pF
- (2) Test level: Air Discharge : ±2kV, ±4kV, ±8kV
 - Contact discharge : ±2kV, ±4kV
 - HCP discharge : ±2kV, ±4kV
 - VCP discharge : ±2kV, ±4kV
- (3) Discharge mode : Single discharge
- (4) Discharge period : at least 1 s
- (5) Discharge polarity : Positive and Negative
- (6) Number of discharge : Minimum 50 times at each test point of contact discharge and at least 200 times of discharge to EUT in total. Minimum 10 times at each test area of air discharge selected.

- 2. Standard requirement : Criterion B

3. Performance criterion

- (1) Criterion A : Normal performance during test
- (2) Criterion B : Temporary degradation or loss of function or performance which is self-recoverable
- (3) Criterion C : Temporary degradation or loss of function or performance which requires operator intervention system reset



5.7 SUMMARY OF TEST RESULT

Temperature: 20 °C Humidity: 48% RH
Tested Mode: N/A Tested By: Tom Lin
Atmospheric Air Pressure: 101.2 kPa Tested Date: May 24, 2004

Test Result: Criterion A pass

SEVERITY LEVEL	COUPLING MODE & TEST OBSERVATION			
	AIR DISCHARGE	CONTACT DISCHARGE	HCP	VCP
±2kV	A	A	A	A
±4kV	A	A	A	A
±8kV	A	NR	NR	NR

NOTE:

Description of test observation:

A: There was no change compared with initial operation during the test.

NR: No requirement

Description of test points:

1. Modem port of EUT.
2. VGA port of EUT.
3. PS/2 port of EUT.
4. HCP.
5. VCP.



6. RADIATED IMMUNITY TEST

6.1 TEST EQUIPMENT

EQUIPMENT / FACILITIES	MANUFACTURER	MODEL # / SERIAL #	DUE DATE OF CAL. & CAL. CENTER
SIGNAL GENERATOR	HP	8648A/ 3636A022776	JUN. 2004 ETC
ANTENNA	SCHAFFNER CHASE	CBL6111/ 1188	AUG. 2004 SRT
FIELD SENSOR	AMPLIFIER RESEARCH	FP2000/ 28499	DEC. 2004 ETC
POWER AMPLIFIER	AMPLIFIER RESEARCH	100W1000M1/ 19509	JUN. 2004 ETC
ANECHOIC CHAMBER	SRT	A05/ SRT005	OCT. 2004 SRT
V/M MONITOR	A.R.	FM2000/ 15970	N/A
MONITOR	SHIN	SI-609/ 905130	N/A
CCD	TOPVIEW	N/A/ 95113762	N/A
ABSORBER	ETS	N/A	N/A
COAXIAL CABLE	SUNCITY	J400/ 30CM	APR. 2005 SRT
COAXIAL CABLE	TIME	LMR-400/ 4M	APR. 2005 SRT


NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

6.2 TEST PROCEDURE

According to IEC/EN 61000-4-3:2002+A1:2002




6.3 TEST SETUP

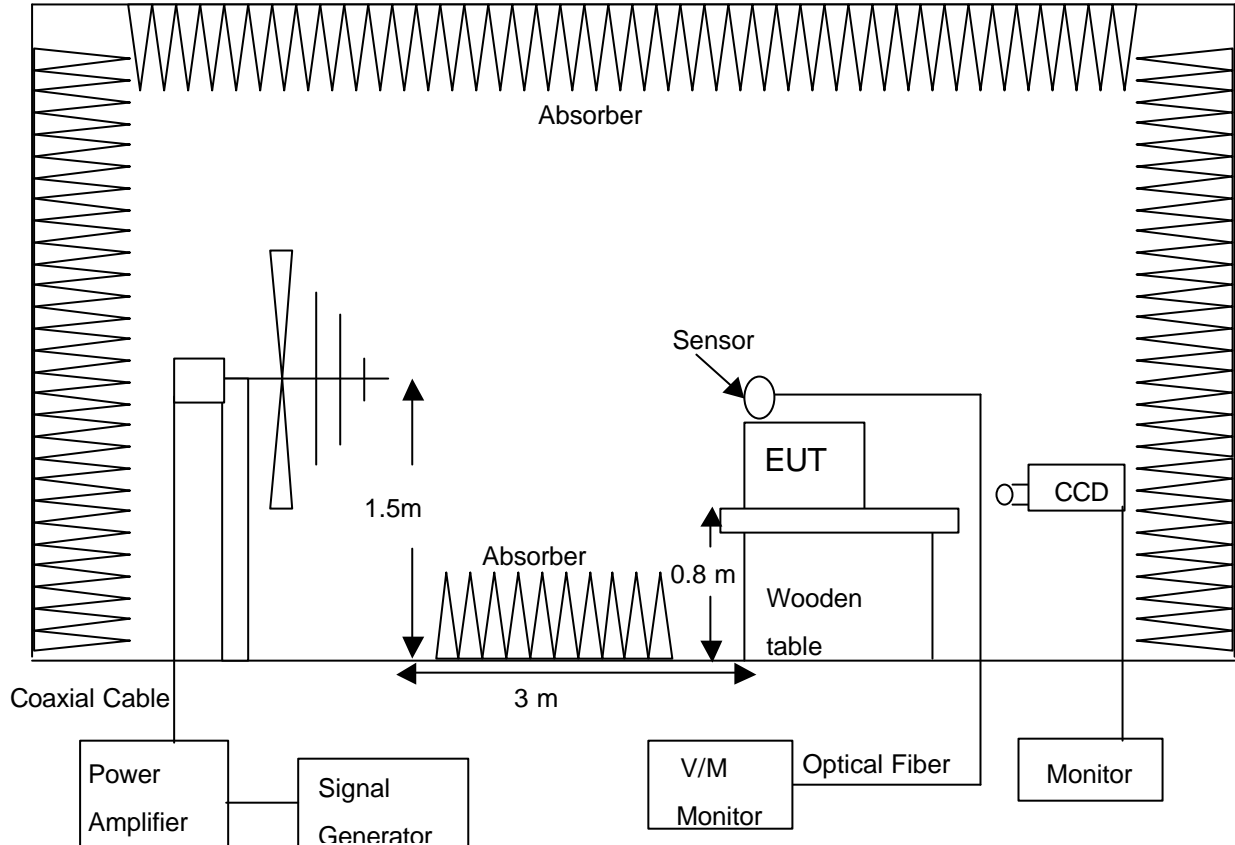

NOTE :

1. The wooden table should be 0.8m high for table top EUT and 0.1m for floor-standing EUT.
2. For the actual test configuration, please refer to the photos of testing.

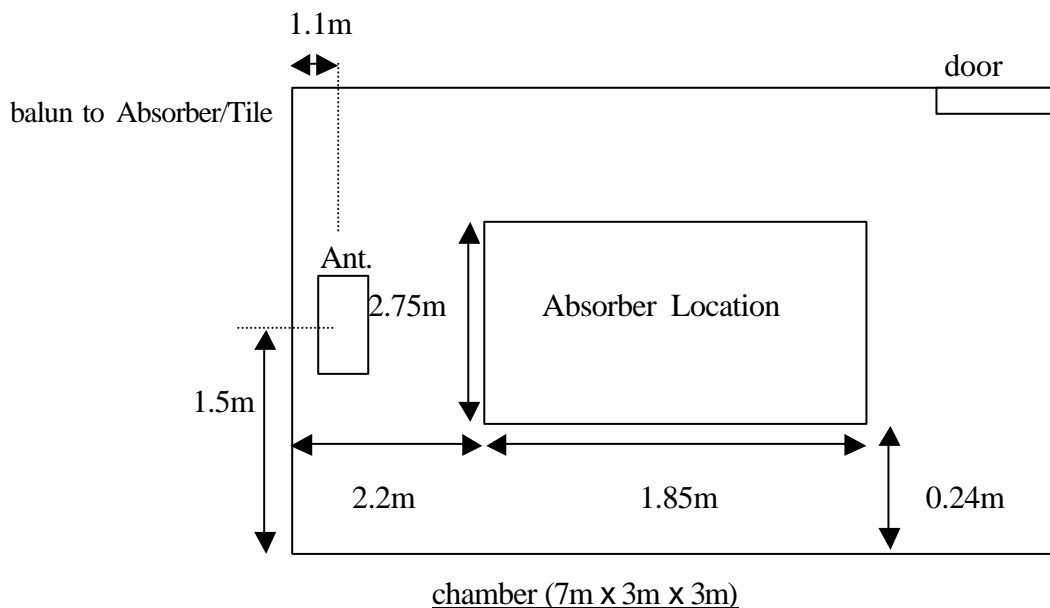



6.4 DESCRIPTION OF SUPPORT UNIT

Same as section 4.1.5 of this report.

6.5 EUT OPERATING CONDITION

Same as section 4.1.6 of this report.

6.6 TEST CONDITION / PERFORMANCE CRITERIA

1. Test condition

- (1) Source voltage and frequency :230V/50Hz, single phase
- (2) Sweeping frequency : 80MHz – 1 GHz
- (3) Test level :3V/m, the frequency step is 1%
- (4) The four sides of EUT are tested :front, rear, left, right
- (5) Modulation :80%AM, 1kHz Dwell time for each frequency is 3 sec.
- (6) Antenna Polarization :Horizontal and Vertical
- (7) Standard requirement :Criterion A

2. Performance criterion

- (1) Criterion A : Normal performance during test
- (2) Criterion B : Temporary degradation or loss of function or performance which is self-recoverable.
- (3) Criterion C : Temporary degradation or loss of function or performance which requires operator intervention system reset.

6.7 TEST RESULT

Temperature: 24°C Humidity: 57 % RH
 Tested Mode: N/A Tested By: Tom Lin
 Tested Date: May 23, 2004

Test Result : Criterion A pass

FREQUENCY	LEVEL	MODULATION	DIRECTION	TEST RESULT (CRITERION)	
				H	V
80MHz - 1GHz	3V/m	80%AM, 1kHz	FRONT	A	A
80MHz - 1GHz	3V/m	80%AM, 1kHz	REAR	A	A
80MHz - 1GHz	3V/m	80%AM, 1kHz	LEFT	A	A
80MHz - 1GHz	3V/m	80%AM, 1kHz	RIGHT	A	A

NOTE:

Description of test observation:

A: There was no change compared with initial operation during the test.



7. RADIATED IMMUNITY TEST

7.1 TEST EQUIPMENT

EQUIPMENT / FACILITIES	MANUFACTURER	MODEL # / SERIAL #	DUE DATE OF CAL. & CAL. CENTER
SIGNAL GENERATOR	HP	8648A/ 3636A022776	JUN. 2004 ETC
ANTENNA	SCHAFFNER CHASE	CBL6111/ 1188	AUG. 2004 SRT
FIELD SENSOR	AMPLIFIER RESEARCH	FP2000/ 28499	DEC. 2004 NML
POWER AMPLIFIER	AMPLIFIER RESEARCH	100W1000M1/ 19509	JUN. 2004 ETC
ANECHOIC CHAMBER	SRT	A05/ SRT005	OCT. 2004 SRT
V/M MONITOR	A.R.	FM2000/ 15970	N/A
MONITOR	SHIN	SI-609/ 905130	N/A
CCD	TOPVIEW	N/A/ 95113762	N/A
ABSORBER	ETS	N/A	N/A
COAXIAL CABLE	SUNCITY	J400/ 30CM	APR. 2005 SRT
COAXIAL CABLE	TIME	LMR-400/ 4M	APR. 2005 SRT


NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

7.2 TEST PROCEDURE

According to ENV 50204:1995




7.3 TEST SETUP

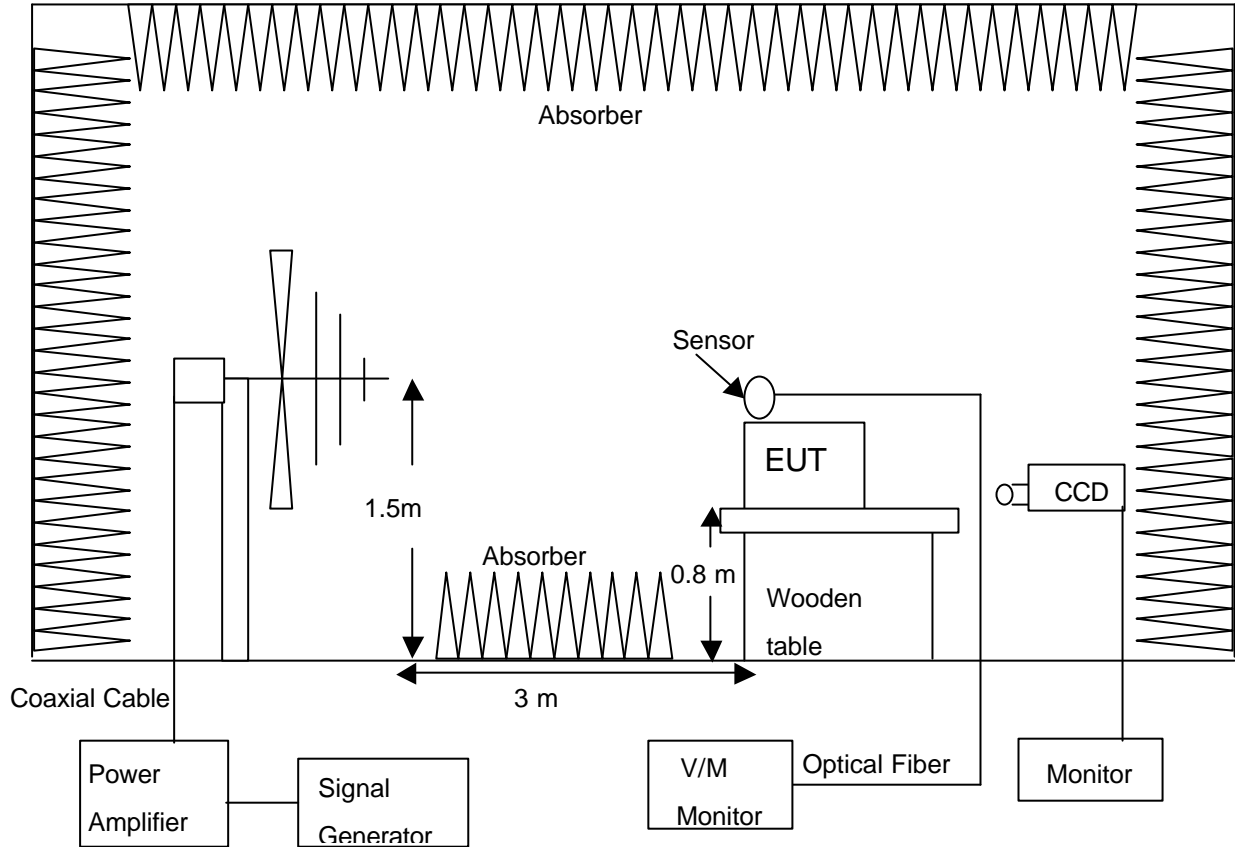

NOTE :

1. The wooden table should be 0.8m high for table top EUT and 0.1m for floor-standing EUT.
2. For the actual test configuration, please refer to the photos of testing.

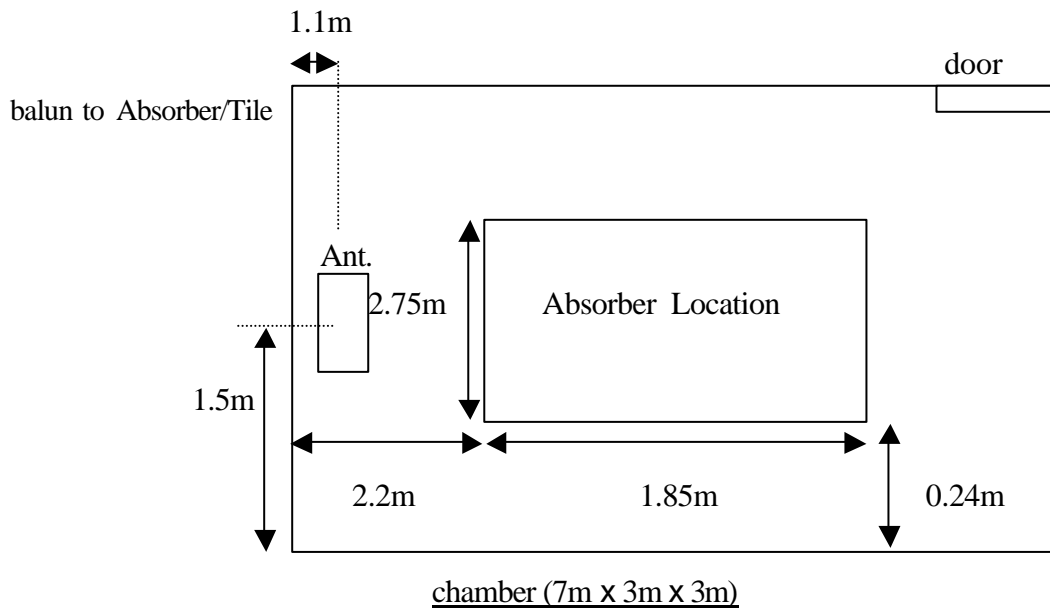



7.4 DESCRIPTION OF SUPPORT UNIT

Same as section 4.1.5 of this report.

7.5 EUT OPERATING CONDITION

Same as section 4.1.6 of this report.

7.6 TEST CONDITION / PERFORMANCE CRITERIA

1. Test condition

- (1) Source voltage and frequency :230V/50Hz, single phase
- (2) Sweeping frequency : 900 MHz +/-5 MHz
- (3) Test level :3V/m, the frequency step is 1%
- (4) The four sides of EUT are tested :front, rear, left, right
- (5) Modulation :50% duty cycle(1Hz), 200Hz pluse Dwell time for each frequency at least 1sec..
- (6) Standard requirement :Criterion A

2. Performance criterion

- (1) Criterion A : Normal performance during test
- (2) Criterion B : Temporary degradation or loss of function or performance which is self-recoverable.
- (3) Criterion C : Temporary degradation or loss of function or performance which requires operator intervention system reset.

7.7 TEST RESULT

Temperature: 24°C Humidity: 57% RH
 Tested Mode: N/A Tested By: Tom Lin
 Tested Date: May 23, 2004

Test Result : Criterion A pass

FREQUENCY	LEVEL	MODULATION	DIRECTION	TEST RESULT (CRITERION)	
				H	V
900MHz +/-5MHz	3V/m	50%pulse, 1Hz	FRONT	A	A
900MHz +/-5MHz	3V/m	50%pulse, 1Hz	REAR	A	A
900MHz +/-5MHz	3V/m	50%pulse, 1Hz	LEFT	A	A
900MHz +/-5MHz	3V/m	50%pulse, 1Hz	RIGHT	A	A

NOTE:

Description of test observation:

A: There was no change compared with initial operation during the test.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

TEST REPORT

Reference No.:A04042905
Report No.:EMCA04042905
Page:32 of 51
Date:May 31, 2004

8. ELECTRICAL FAST TRANSIENT / BURST IMMUNITY TEST



8.1 TEST EQUIPMENT

EQUIPMENT / FACILITIES	MANUFACTURER	MODEL # / SERIAL #	DUE DATE OF CAL & CAL CENTER
EFT GENERATOR	HAEFELY	PEFT-JUNIOR / 583-333-122	APR. 2005 ETC
CLAMP	HAEFELY	TRENCH / 080421-12	NOV. 2004 ETC
GROUND PLANE 2M x 3M	SRT	N/A	N/A

7.2 TEST PROCEDURE

According to IEC/EN 61000-4-4:1995+A1:2001+A2:2001

8.3 TEST SET-UP

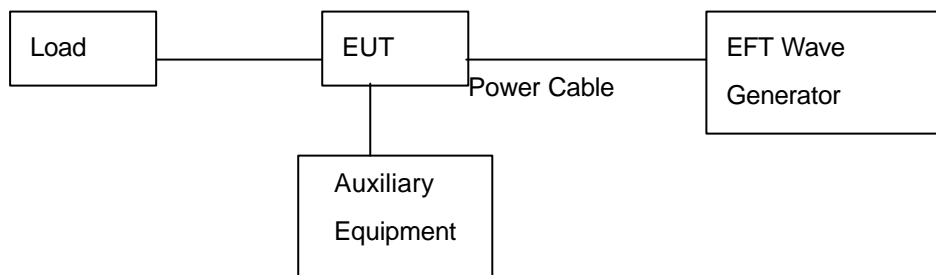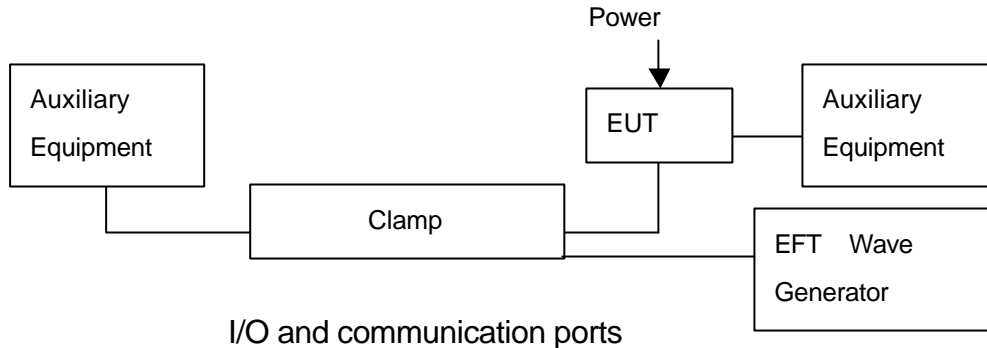

NOTE :

1. The EUT system was put on a wooden table with 0.8m height for table top EUT and 0.1m for floor-standing EUT above ground reference plane.
2. For the actual test configuration, please refer to the photos of testing.
3. The minimum distance between the EUT and all other conductive structure was more than 0.5m.
4. The minimum distance between the coupling plates of the coupling clamps (if used) and all over conductive structures, except the ground plane beneath the coupling clamp and beneath the EUT was more than 0.5m.
5. The power cable connecting EUT was controlled under 1m.

8.4 DESCRIPTION OF SUPPORT UNIT

Same as section 4.1.5 of this report.

8.5 EUT OPERATING CONDITION

Same as section 4.1.6 of this report.



8.6 TEST CONDITION / PERFORMANCE CRITERIA

1. Test condition

- (1) Source voltage and frequency : 230V/50Hz, single phase
- (2) Pulse risetime and duration : 5ns / 50ns
- (3) Pulse repetition : 5kHz
- (4) Polarity : Positive Polarization and Negative Polarization
- (5) Burst duration and period : 15ms / 300ms
- (6) Test duration : 61sec each line
- (7) Time between test : 10Sec
- (8) Severity levels : Power Line ± 1 kV
Signal/Control Line ± 0.5 kV
- (9) Standard requirement : Criterion B

2. Performance criterion

- (1) Criterion A : Normal performance during test
- (2) Criterion B : Temporary degradation or loss of function or performance which is self-recoverable.
- (3) Criterion C : Temporary degradation or loss of function or performance which requires operator intervention system reset.

8.7 SUMMARY OF TEST RESULT

Temperature: 23 °C Humidity: 59% RH
 Tested Mode: N/A Tested By: Tom Lin
 Atmospheric Air Pressure: 101.2 kPa Tested Date: May 23, 2004

Test Result : Criterion B pass

Voltage		0.25kV		0.5kV		1kV	
Polarity		+	-	+	-	+	-
Test Result	L1	NR	NR	A	A	B	B
	L2	NR	NR	A	A	B	B
	GND	NR	NR	A	A	B	B
	Signal/Control Line	A	A	A	A	NR	NR

NOTE:

Description of test observation:

A: There was no change compared with initial operation during the test.

B: The image was flickered during the test.

N/A: Not applicable, as the signal/control line used in typical is less than 3 m.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	<h1>TEST REPORT</h1>	Reference No.:A04042905 Report No.:EMCA04042905 Page:35 of 51 Date:May 31, 2004
--	----------------------	--

9. SURGE TEST (POWER LINE)

9.1 TEST EQUIPMENT

EQUIPMENT / FACILITIES	MANUFACTURER	MODEL # / SERIAL #	DUE DATE OF CAL. & CAL. CENTER
SURGE TEST (System Mainframe)	SCHAFFNER	NSG 2050 / 199904-057SC	JUL. 2004 ETC
SURGE TEST (Impulse Network)	SCHAFFNER	PNW 2050 / 256	JUL. 2004 ETC
SURGE TEST (Pulse Coupling Network)	SCHAFFNER	CDN 131/133 / 520	JUL. 2004 ETC

9.2 TEST PROCEDURE

According to IEC/EN 61000-4-5:1995+A1:2001

9.3 TEST SET-UP



NOTE :

1. The EUT system was put on a wooden table with 0.8m height above ground reference plane.
2. For the actual test configuration, please refer to the photos of testing.

9.4 DESCRIPTION OF SUPPORT UNIT

Same as section 4.1.5 of this report.

9.5 EUT OPERATING CONDITION

Same as section 4.1.6 of this report.



9.6 TEST CONDITION / PERFORMANCE CRITERIA

1. Test condition

- (1) Test level : Common mode : $\pm 0.5\text{kV}$, $\pm 1\text{kV}$, $\pm 2\text{kV}$
 Differential mode : $\pm 0.25\text{kV}$, $\pm 0.5\text{kV}$, $\pm 1\text{kV}$
- (2) Number of Pulse : 5
- (3) Phase : 0° , 90° , 180° , 270°
- (4) Polarity : Positive and Negative polarization
- (5) Repetition : 60 s
- (6) Waveform : 1.2/50 μs (open circuit)
- (7) Standard requirement : Criterion B

2. Performance criterion

- (1) Criterion A : Normal performance during test
- (2) Criterion B : Temporary degradation or loss of function or performance which is self-recoverable
- (3) Criterion C : Temporary degradation or loss of function or performance which requires operator intervention system reset

9.7 SUMMARY OF TEST RESULT

Temperature: 24 °C Humidity: 56% RH
 Tested Mode: N/A Tested By: Tom Lin
 Atmospheric Air Pressure: 101.2 kPa Tested Date: May 24, 2004

Test Result : Criterion A pass

Mode	Coupling	Voltage	Phase			
			0°	90°	180°	270°
Common	L + PE N + PE	+/-0.5kV	A	A	A	A
		+/-1kV	A	A	A	A
		+/-2kV	A	A	A	A
Differential	L + N	+/-0.25kV	A	A	A	A
		+/-0.5kV	A	A	A	A
		+/-1kV	A	A	A	A

NOTE:

Description of test observation:

A: There was no change compared with initial operation during the test.



10. INDUCED RF FIELDS (CONDUCTED SUSCEPTIBILITY) TEST

10.1 TEST EQUIPMENT

EQUIPMENT / FACILITIES	MANUFACTURER	MODEL # / SERIAL #	DUE DATE OF CAL. & CAL. CENTER	FINAL TEST BE USED
EM INJECTION CLAMP	FCC	F-203I-23mm/ 110	MAY 2005 ETC	
POWER LINE CDN	FCC	FCC-801-M5-32A/ 9812	MAY 2005 ETC	
POWER LINE CDN	FCC	FCC-801-M1-32A/ 9820	MAY 2005 ETC	
SIGNAL LINE CDN	FCC	FCC-801-T2/ 9830	MAY 2005 ETC	
SIGNAL LINE CDN	FCC	FCC-801-T6/ 9832	MAY 2005 ETC	
POWER LINE CDN	FCC	FCC-801-M2-32A/ 9840	NOV. 2004 ETC	
SIGNAL GENERATOR	HP	8648A/ 3636A02776	JUN. 2004 ETC	
POWER AMPLIFIER	A.R.	150A100A/ 19553	JUL. 2004 ETC	
DUAL DIRECTION COULPER	A.R.	DC2600/ 25893	AUG. 2004 ETC	
POWER METER	HP	435A/8481A/ 1810A08277	JAN. 2005 ETC	
SIGNAL LINE CDN	FCC	FCC-801-S25/ 9845	MAY 2005 ETC	
POWER LINE CDN	FCC	FCC-801-M3-32A/ 9874	MAY 2005 ETC	
T2	EM-TEST	ATT6/75/ 1001-40	N/A	
COAXIAL CABLE	SUNCITY	CABLE14/ #14-1M	APR. 2005 SRT	
COAXIAL CABLE	SUNCITY	CABLE05/ #5-5M	APR. 2005 SRT	
COAXIAL CABLE	SUNCITY	J400/ 2M	APR. 2005 SRT	


10.2 TEST PROCEDURE

According to IEC/EN 61000-4-6:1996+A1:2001




10.3 TEST SET-UP

(1) For CDN injection :

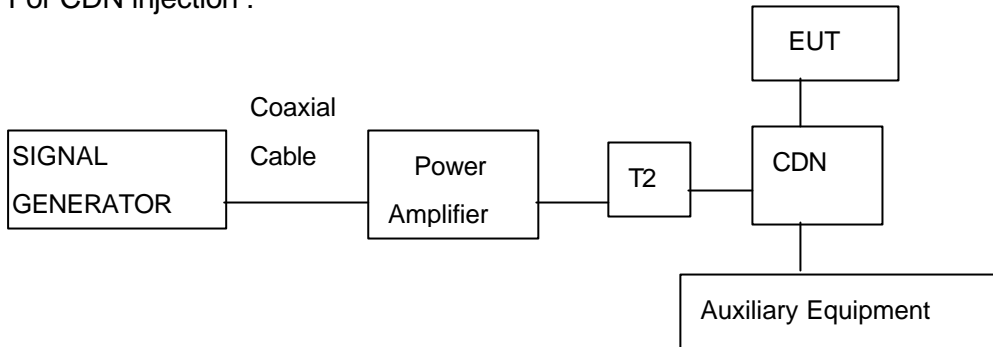

(2) For Clamp injection :

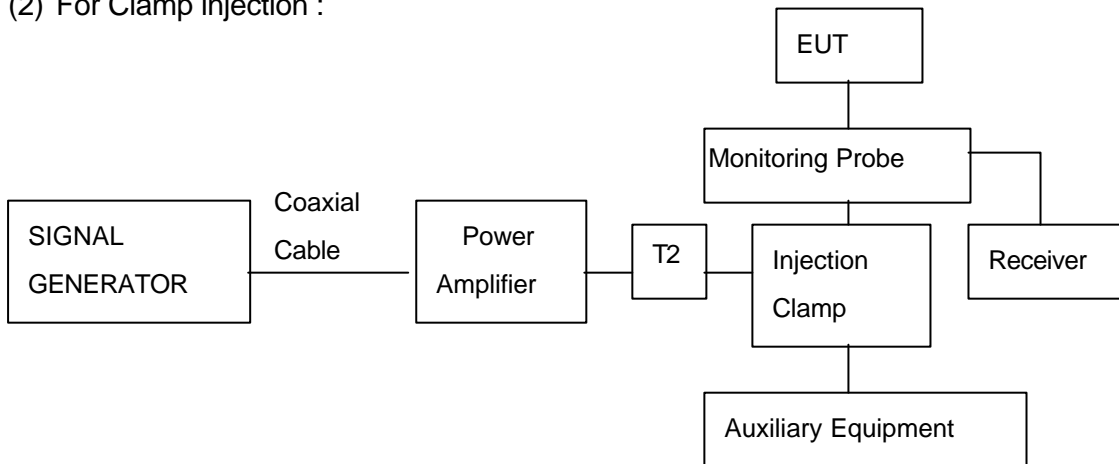

NOTE :

1. The EUT system was put on a wooden table with 0.1m height above ground.
2. For the actual test configuration, please refer to the photos of testing.
3. The distance between CDN(Clamp) and EUT was controlled between 0.1m and 0.3m.
4. The model no. of the CDN connected to EUT is FCC-801-M3-32A.

10.4 DESCRIPTION OF SUPPORT UNIT

Same as section 4.1.5 of this report.

10.5 EUT OPERATING CONDITION

Same as section 4.1.6 of this report.



10.6 TEST CONDITION / PERFORMANCE CRITERIA

1. Test condition

- (1) Source voltage and frequency :230 V/ 50 Hz, single phase
- (2) Sweeping frequency : 150 kHz – 80 MHz
- (3) Test level :3 V, the frequency step is 1%
- (4) Modulation :AM 80%, 1 kHz
- (5) Dwell time for each frequency :3 sec
- (6) Standard requirement :Criterion A

2. Performance criterion

- (1) Criterion A : Normal performance during test
- (2) Criterion B : Temporary degradation or loss of function or performance which is self-recoverable
- (3) Criterion C : Temporary degradation or loss of function or performance which requires operator intervention system reset

10.7 SUMMARY OF TEST RESULT

Temperature: 25° C Humidity: 56% RH
Tested Mode: N/A Tested By: Tom Lin
Tested Date: May 25, 2004

Test Result : Criterion A pass

FREQUENCY	LEVEL	MODULATION	INJECTION METHOD	TEST RESULT (CRITERION)
150kHz - 80MHz	3V	80% AM, 1 kHz	M3	A
150kHz - 80MHz	3V	80% AM, 1 kHz	CLAMP	A

NOTE:

Description of test observation:

A: There was no change compared with initial operation during the test.



11. POWER FREQUENCY MAGNETIC-FIELD TEST


11.1 TEST EQUIPMENT

EQUIPMENT / FACILITIES	MANUFACTURER	MODEL # / SERIAL #	DUE DATE OF CAL. & CAL. CENTER
MAGNETIC FIELD TESTER	HAEFELY	MAG 100.1/ 080.015-04	JAN. 2005 SRT
MAGNETIC FIELD COIL	HAEFELY	MAG 100.1/ 080.015-04	JAN. 2005 SRT
MAGNETIC FIELD METER	F.W.BELL	4080/ 19990416	MAR. 2005 ITRI

11.2 TEST PROCEDURE

According to IEC/EN 61000-4-8:1993+A1:2001

11.3 TEST SET-UP

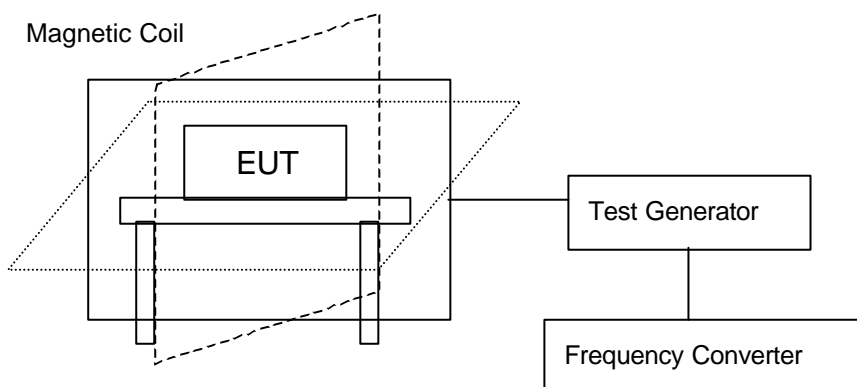

NOTE :

1. The EUT system was put on a wooden table with 0.8m height above ground.
2. For the actual test configuration, please refer to the photos of testing
3. $1A/m = 12.56mG$, $3A/m = 37.68mG$, $10A/m = 125.6mG$,

11.4 DESCRIPTION OF SUPPORT UNIT

Same as section 4.1.5 of this report.



11.5 EUT OPERATING CONDITION

Same as section 4.1.6 of this report.

11.6 TEST CONDITION / PERFORMANCE CRITERIA

1. Test condition

- (1) Test axis : X, Y and Z axes
- (2) Test time : 5 min / each axis
- (3) Field strength : 3 A/m
- (4) Standard requirement : Criterion A

2. Performance criterion

- (1) Criterion A : Normal performance during test
- (2) Criterion B : Temporary degradation or loss of function or performance which is self-recoverable
- (3) Criterion C : Temporary degradation or loss of function or performance which requires operator intervention system reset

11.7 SUMMARY OF TEST RESULT

Temperature: 23°C Humidity: 58% RH
Tested Mode: N/A Tested By: Tom Lin
Frequency of Magnetic Field: 50Hz, 60Hz Tested Date: May 24, 2004

Test Result : Criterion A pass

ORIENTATION	FIELD STRENGTH	TEST RESULT (CRITERION)
X	3 A/m	A
Y	3 A/m	A
Z	3 A/m	A

NOTE:

Description of test observation:

A: There was no change compared with initial operation during the test.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	<h1>TEST REPORT</h1>	Reference No.:A04042905 Report No.:EMCA04042905 Page:42 of 51 Date:May 31, 2004
--	----------------------	--

12. VOLTAGE DIPS, INTERRUPTS, VARIATIONS TEST


12.1 TEST EQUIPMENT

EQUIPMENT / FACILITIES	MANUFACTURER	MODEL # / SERIAL #	DUE DATE OF CAL. & CAL. CENTER
INTERFERENCE SIMULATOR	HAEFELY	PLINE 1610/ 083-732-05	APR. 2005 ETC

12.2 TEST PROCEDURE

According to IEC/EN 61000-4-11:1994+A1:2001

12.3 TEST SET-UP

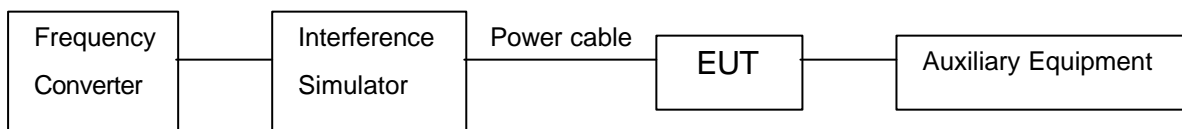

NOTE :

1. The EUT system was put on a wooden table with 0.8m height above ground.
2. For the actual test configuration, please refer to the photos of testing.

12.4 DESCRIPTION OF SUPPORT UNIT

Same as section 4.1.5 of this report.

12.5 EUT OPERATING CONDITION

Same as section 4.1.6 of this report.



12.6 TEST CONDITION / PERFORMANCE CRITERIA

1. Test condition

- (1) Source voltage and frequency : 230V/50Hz, single phase
- (2) Test level : Dip depth 95%, 0.5 period
30%, 25 period
Interrupt 95%, 250 period
- (3) Phase : 0°, 180°
- (4) Test duration : 2min each phase
- (5) Time between test : 10 sec
- (6) Standard requirement : Dip 95% : Criterion B;
Dip 30% : Criterion C;
Interrupt > 95%: Criterion C

2. Performance criterion

- (1) Criterion A : Normal performance during test
- (2) Criterion B : Temporary degradation or loss of function or performance which is self-recoverable.
- (3) Criterion C : Temporary degradation or loss of function or performance which requires operator intervention system reset.

12.7 SUMMARY OF TEST RESULT

Temperature: 25°C Humidity: 57% RH
 Tested Mode: N/A Tested By: Tom Lin
 Tested Date: May 24, 2004

AC POWER	DIP DEPTH	INTERVAL	DIP TIME	TEST TIME	PHASE	TEST RESULT (Criterion)
230V/50Hz	95%	10 sec	0.5 period	2 min	0°	A
					180°	A
	30%	10 sec	25 period	2 min	0°	A
					180°	A
	95% (interrupt)	10 sec	250 period	2 min	0°	B
					180°	B


NOTE:

1. The power voltage range: 100 V to 240 V the range 140 V is 140% of the lowest voltage.
2. Description of test observation:
 A: There was no change compared with initial operation during the test.
 B: EUT reset automatically.



13. PHOTOS OF TESTING

- Conducted test

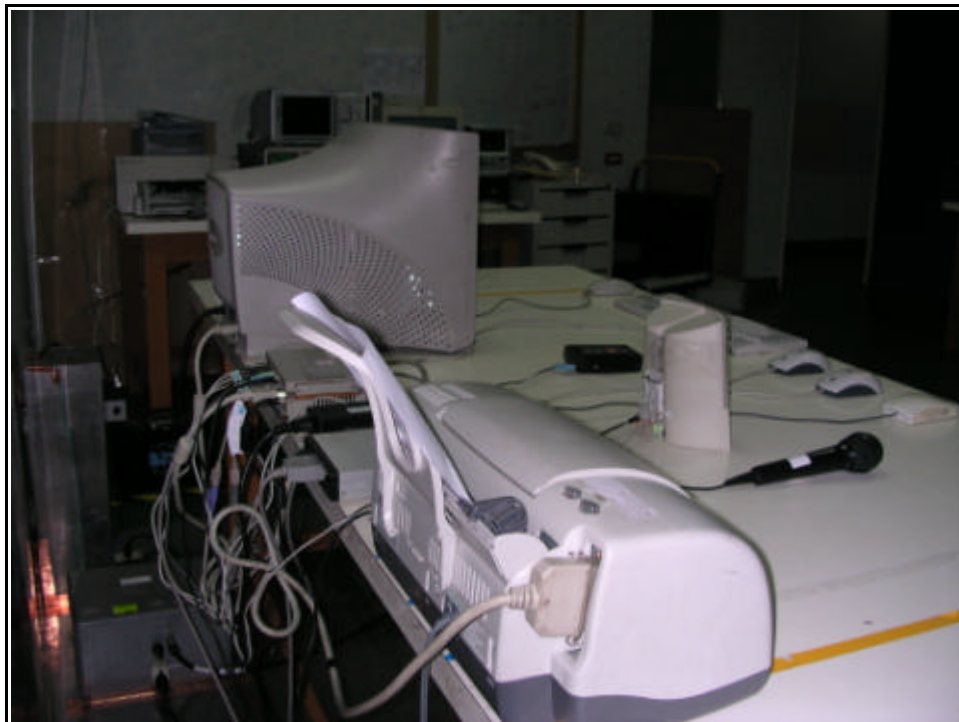



- Radiated test





- Harmonics test



- Voltage fluctuations test





- Electrostatic discharge immunity test



- Electrical fast transient / burst immunity test





- Radiated immunity test





-Surge test (power line)



- Induced RF fields (conducted susceptibility) test





- Power frequency magnetic-field test



- Voltage dips, interrupts, variations test





14. TERMS OF ABRIVATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction