CE EMC
TEST REPORT

for

Fanless Medical Station

MODEL: xxxxxONYX-2122DTy-xxxxxxx

Test Report Number:
90910202-E

Issued to:

AAEON Technology Inc.

**5F,No.135, Lane 235,Pao Chiao Rd., Hsin-Tien City,
Taipei, Taiwan, R.O.C.**

Issued by:

Compliance Certification Services Inc.

Sindian BU.

**No.163-1, Jhongsheng Rd., Sindian City,
Taipei County 23151, Taiwan**

TEL: 886-2-22170894

FAX: 886-2-22171029

Issued Date: October 09, 2009

Testing Laboratory
1108

ACCREDITED
TESTING CERT #0824.01

Note: *This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies. The test results in the report only apply to the tested sample.*

Revision History

Rev.		Issue Date		Revisions	Effect Page	Revised By
00		October 09, 2009		Initial Issue	ALL	Andrea Chen

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

TABLE OF CONTENTS

1 TEST CERTIFICATION 4
2 TEST RESULT SUMMARY 5
3 EUT DESCRIPTION 6
4 TEST METHODOLOGY 7
4.1. DECISION OF FINAL TEST MODE 7
4.2. EUT SYSTEM OPERATION 7
5 SETUP OF EQUIPMENT UNDER TEST 8
5.1. DESCRIPTION OF SUPPORT UNITS 8
5.2. CONFIGURATION OF SYSTEM UNDER TEST 9
6 FACILITIES AND ACCREDITATIONS 10
6.1. FACILITIES 10
6.2. ACCREDITATIONS 10
6.3. MEASUREMENT UNCERTAINTY 10
7 EMISSION TEST 11
7.1. CONDUCTED EMISSION MEASUREMENT 11
7.2. RADIATED EMISSION MEASUREMENT 15
7.3. HARMONICS CURRENT MEASUREMENT 19
7.4. VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT 22
8 IMMUNITY TEST 25
8.1. GENERAL DESCRIPTION 25
8.2. GENERAL PERFORMANCE CRITERIA DESCRIPTION 26
8.3. ELECTROSTATIC DISCHARGE (ESD) 27
8.4. RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD (RS) 33
8.5. ELECTRICAL FAST TRANSIENT (EFT) 36
8.6. SURGE IMMUNITY TEST 39
8.7. CONDUCTED RADIO FREQUENCY DISTURBANCES (CS) 42
8.8. POWER FREQUENCY MAGNETIC FIELD 45
8.9. VOLTAGE DIP & VOLTAGE INTERRUPTIONS 48
9 PHOTOGRAPHS OF THE TEST CONFIGURATION 48

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

1 TEST CERTIFICATION

Product:	Fanless Medical Station
Brand:	AAEON
Model:	xxxxxONYX-2122DTy-xxxxxxx (Where y is T or blank and x is 0-9,A-Z,-or blank)
Applicant:	**AAEON Technology Inc.** 5F,No.135, Lane 235,Pao Chiao Rd., Hsin-Tien City, Taipei, Taiwan, R.O.C.
Manufacturer:	**AAEON Technology Inc.** 5F,No.135, Lane 235,Pao Chiao Rd., Hsin-Tien City, Taipei, Taiwan, R.O.C.
Tested:	September 11, 2009 ~ September 30, 2009
Applicable Standards:	**EN 60601-1-2: 2001 + A1: 2006** **EN 55011: 2007 +A2: 2007 (Group 1, Class B)** IEC 61000-4-2: 1995+A1: 1998+A2: 2000 IEC 61000-4-3: 2006 IEC 61000-4-4: 2004 IEC 61000-4-5: 2005 IEC 61000-4-6: 2003 + A1: 2004 + A2: 2006 IEC 61000-4-8: 1993+A1: 2000 IEC 61000-4-11: 2004 **EN 61000-3-2: 2006, Class D** **EN 61000-3-3: 1995+ A1: 2001 + A2: 2005**

Deviation from Applicable Standard
None

The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the Directive 93/42/EEC concerning medical devices and technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Vince Chiang
Assistant Manager

Reviewed by:

Vesta Hsu
Supervisor of report document dept.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

2 TEST RESULT SUMMARY

EMISSION			
Standard	**Item**	**Result**	**Remarks**
EN 55011: 2007 +A2: 2007 (Group 1, Class B)	Conducted (Power Port)	PASS	Meet Class B limit
	Radiated	PASS	Meet Class B limit
EN 61000-3-2: 2006	Harmonic current emissions	N/A	Please see the page 21
EN 61000-3-3: 1995+ A1: 2001 + A2: 2005	Voltage fluctuations & flicker	PASS	Meets the requirements

IMMUNITY			
Standard	**Item**	**Result**	**Remarks**
IEC 61000-4-2: 1995 + A1: 1998 + A2: 2000	ESD	PASS	See Item 8.3 of this report
IEC 61000-4-3: 2006	RS	PASS	See Item 8.4 of this report
IEC 61000-4-4: 2004	EFT	PASS	See Item 8.5 of this report
IEC 61000-4-5: 2005	Surge	PASS	See Item 8.6 of this report
IEC 61000-4-6: 2003 + A1: 2004 + A2: 2006	CS	PASS	See Item 8.7 of this report
IEC 61000-4-8:1993 + A1: 2000	PFMF	PASS	See Item 8.8 of this report
IEC 61000-4-11: 2004	Voltage dips & voltage variations	PASS	See Item 8.9 of this report

Note: 1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.
2. The information of measurement uncertainty is available upon the customer's request.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

3 EUT DESCRIPTION

Product	Fanless Medical Station
Trade Name	AAEON
Model	xxxxxONYX-2122DTy-xxxxxxx (Where y is T or blank and x is 0-9,A-Z,-or blank)
Applicant	AAEON Technology Inc.
Housing Type	Plastic
Identify Number	90910202
Received Date	September 10, 2009
EUT Power Rating	9~30VDC
AC Power During Test	230VAC / 50 Hz
AC Adaptor Manufacturer	PROTEK POWER
AC Adaptor Model Number	PMP120-14-B16
Power Adaptor Power Rating	I/P: 100-240VAC, 47-63Hz, 1.4-0.6A; O/P: 24VDC, 5.0A
DC Power Cable Type	Unshielded, 1.8m (Non-detachable, with a core)
AC Power Cable Type	Unshielded, 1.8m (Detachable)
OSC/Clock Frequencies	25MHz; 14.31818MHz; 32.768kHz
EUT I/O Cable Type	Unshielded, 0.15m (Detachable)

I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH
1) SIO Port	3	3
2) PS/2 one to two adaptor	1	1
3) VGA Port	1	1
4) Microphone Port	1	1
5) Earphone Port	1	1
6) USB Port	4	4
7) LAN Port	1	1

Note: Client consigns only one model sample to test (Model Number: ONYX-2122DTT).

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

4 TEST METHODOLOGY

4.1. DECISION OF FINAL TEST MODE

The EUT was tested together with the above additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.
The test configuration/ modes is as the following:

Conduction Modes:

1	**D-SUB + EUT / 1920X1080, VF=60Hz**
2	**D-SUB + EUT / 1600X1200, VF=60Hz**
3	**D-SUB + EUT / 1280X1024, VF=60Hz**
4	**D-SUB + EUT / 800X600, VF=60Hz**
5	**D-SUB / 2048X1536, VF=60Hz**

Radiation Modes:

1	**D-SUB + EUT / 1920X1080, VF=60Hz**
2	**D-SUB + EUT / 1600X1200, VF=60Hz**
3	**D-SUB + EUT / 1280X1024, VF=60Hz**
4	**D-SUB + EUT / 800X600, VF=60Hz**
5	**D-SUB / 2048X1536, VF=60Hz**

Conduction: Mode 1

Radiation: Mode 1

4.2. EUT SYSTEM OPERATION

1. Windows XP boots system.
2. Run Emctest.exe to activate all peripherals and display “H” pattern on monitor screen.
3. Run Winemc.exe and choose media player to play music.
4. Run Winemc.exe and choose “E:/& F:/ & G:/ & H:/” to test EUT.
5. Press the start menu, select executive and type ping 192.168.0.2 –t (EUT), ping 192.168.0.1–t (Server PC).

Note: *Test program is self-repeating throughout the test.*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

5 SETUP OF EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

EUT Devices:

No.	Equipment	Model No.	Trade Name
1	CPU	Intel Core2 Duo U7500 1.06GHz	Intel
2	PANEL (TFT LCD.21.5")	M215HW01V0	AUO
3	Hard Disk	MHZ2080BH/80G	Fujitsu
4	Memory	DSL1GB DDR2-667MHZ / ELPIDA E5108AG-6E-E	ELPIDA


Peripherals Devices:

No.	Equipment	Model No.	Serial No.	FCC ID / BSMI ID	Trade Name	Data Cable	Power Cord
1-4	USB 2.0 HDD X4	F12-U	N/A	BSMI ID: 4912A002	TeraSys	Shielded, 1.8m	N/A
5	PS/2 Mouse	M071KC	443029438	DoC BSMI: R41108	DELL	Shielded, 1.8m	N/A
6	PS/2 Keyboard	SK-8110	N/A	DoC BSMI: T3A002	DELL	Shielded, 1.8m	N/A
7	Earphone & Microphone	MSB301	N/A	N/A	e-Sense	Unshielded, 1.8m	N/A
8-9	Modem X2	5JEG4033MKO	N/A	5RJTAI-35500-M5-E	TOP-SOLUTION	Shielded, 1.8m	Unshielded, 1.8m
10	Monitor	202P40	BZ000405640006	FCC ID: A3KM107 BSMI: R33048	PHILIPS	Shielded, 1.8m with two cores	Unshielded, 1.8m
11	Modem	5JEG4033MKO	N/A	5RJTAI-35500-M5-E	TOP-SOLUTION	Unshielded, 1.8m	Unshielded, 1.8m
12	Server PC	DCSM	79QTY1S	BSMI: R33002	DELL	Unshielded, 20m	Unshielded, 1.8m

Note:
1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

5.2. CONFIGURATION OF SYSTEM UNDER TEST

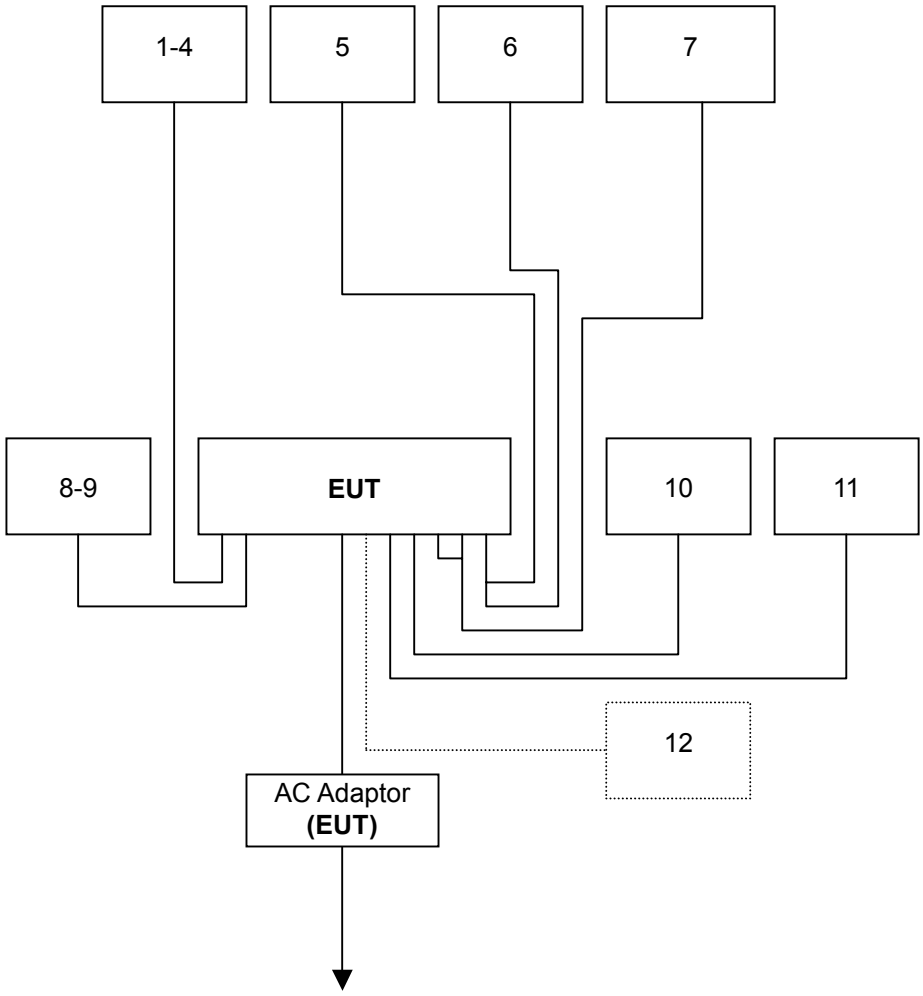

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

6 FACILITIES AND ACCREDITATIONS

6.1. FACILITIES

All measurement facilitiesused to collect the measurement data are located at CCS Taiwan Sindian BU. at No.163-1, Jhongsheng Rd., Sindian City, Taipei County 23151, Taiwan.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4, CISPR 16-1-5.

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan	TAF
USA	A2LA

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	Industry Canada
Germany	TUV Rheinland
Japan	VCCI
Taiwan	BSMI
USA	FCC

Copies of granted accreditation certificates are available for downloading from our web site,

http://www.ccsrf.com

6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	0.15MHz~30MHz	± 1.7366
Radiated emissions	30MHz ~ 200MHz	± 3.8792
	200MHz ~1000MHz	± 3.8914

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Consistent with industry standard (e.g. CISPR 22: 2005, clause 11, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement. Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is base on conducted and radiated emissions being less than U_{CISPR} which is 3.6dB and 5.2dB respectively. CCS values (called U_{Lab} in CISPR 16-4-2) is less than U_{CISPR} as shown in the table above. Therefore, MU need not be considered for compliance.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7 EMISSION TEST

7.1. CONDUCTED EMISSION MEASUREMENT

7.1.1. LIMITS

CLASS A

FREQUENCY (MHz)	Group 1		Group 2		Group 2*	
	Quasi-peak (dBuV)	Average (dBuV)	Quasi-peak (dBuV)	Average (dBuV)	Quasi-peak (dBuV)	Average (dBuV)
0.15 - 0.5	79	66	100	90	130	120
0.50 - 5.0	73	60	86	76	125	115
5.0 - 30.0	73	60	90 Decreasing linearly with logarithm of frequency to 70	80 60	115	105

Note: The lower limit shall apply at the transition frequency
Care should be taken to comply with leakage current requirements.

CLASS B

FREQUENCY (MHz)	Group 1 & 2	
	Quasi-peak (dBuV)	Average (dBuV)
0.15 - 0.5	66 Decreasing linearly with logarithm of frequency to 56	56 Decreasing linearly with logarithm of frequency to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: The lower limit shall apply at the transition frequency
Care should be taken to comply with leakage current requirements.

7.1.2. TEST INSTRUMENTS

Conducted Emission Test Site # B				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TEST RECEIVER	R&S	ESHS10	843743/015	03/29/2010
LISN (EUT)	FCC	FCC-LISN-50-32-2	08009	03/29/2010
LISN	EMCO	3825/2	1382	01/05/2010
BNC CABLE	Huber+Suhner	RG 223/U	BNC B2	01/12/2010
Pulse Limiter	R&S	ESH3-Z2	100374	08/23/2010
THERMO-HYGRO METER	TOP	HA-202	9303-3	02/04/2010
Test S/W	EMI 32.exe			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.1.3. TEST PROCEDURES (please refer to measurement standard or CCS SOP PA-031)

Procedure of Preliminary Test


- The EUT was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per EN 55011 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 15 cm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per EN 55011.
- All I/O cables were positioned to simulate typical actual usage as per EN 55011.
- The test equipment EUT installed received AC power, 230VAC/50Hz, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane.
- All support equipment received power from a second LISN.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.
- During the above scans, the emissions were maximized by cable manipulation.
- The test mode(s) described in Item 3.2 were scanned during the preliminary test.
- After the preliminary scan, we found the test mode described in Item 3.2 producing the highest emission level.
- The worst configuration of EUT and cable of the above highest emission level were recorded for reference of the final test.

Procedure of Final Test

- EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the Average limit in Q.P. mode, then the emission signal was re-checked using an Average detector.
- The test data of the worst-case condition(s) was recorded.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.1.4. TEST SETUP

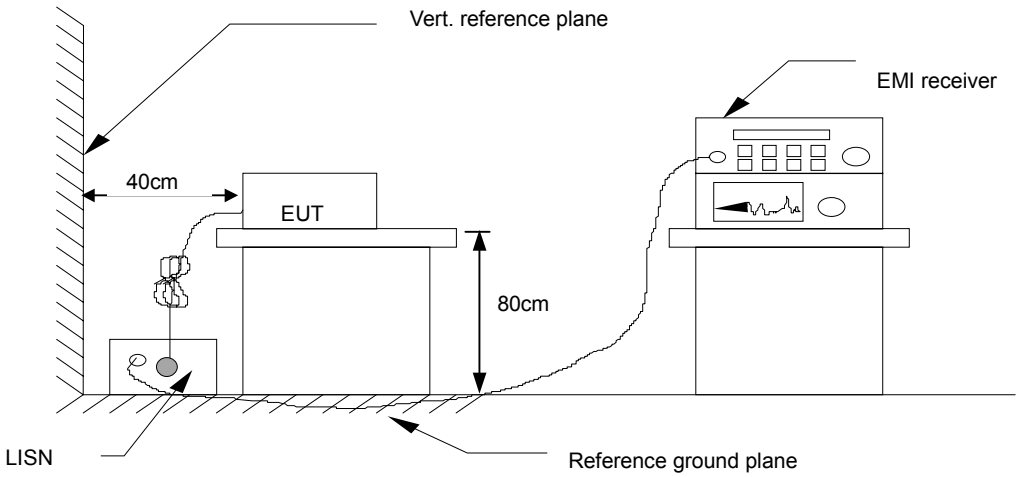

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.5. DATA SAMPLE:

Freq. (MHz)	Read Level (dBuV)	Factor (dB)	Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark (P/Q/A)	Line (L1/L2)
x.xx	42.95	0.55	43.50	56	-12.50	Q	L1

Freq. = Emission frequency in MHz
Read Level = Uncorrected Analyzer/Receiver reading
Factor = Insertion loss of LISN + Cable Loss
Level = Read Level + Factor
Limit Line = Limit stated in standard
Over Limit = Reading in reference to limit
P = Peak Reading
Q = Quasi-peak Reading
A = Average Reading
L1 = Hot side
L2 = Neutral side

Calculation Formula

Over Limit (dB) = Level (dBuV) – Limit Line (dBuV)

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.1.6. TEST RESULTS

Model No.	ONYX-2122DTT	**6dB Bandwidth**	10 kHz
Environmental Conditions	24deg.C, 56% RH, 1010hPa	**Test Mode**	Mode 1
Tested by	WILLY SHU		

(The chart below shows the highest readings taken from the final data.)

Six Highest Conducted Emission Readings							
Frequency Range Investigated				**150 kHz to 30 MHz**			
Freq. (MHz)	Read Level (dBuV)	Factor (dB)	Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark (P/Q/A)	Line (L1/L2)
0.491	**33.44**	**10.57**	**44.01**	**56.14**	**-12.13**	**P**	**L1**
0.675	**32.30**	**10.55**	**42.85**	**56.00**	**-13.15**	**P**	**L1**
0.958	**31.73**	**10.52**	**42.25**	**56.00**	**-13.75**	**P**	**L1**
0.486	**33.38**	**10.27**	**43.65**	**56.23**	**-12.58**	**P**	**L2**
0.665	**32.77**	**10.25**	**43.02**	**56.00**	**-12.98**	**P**	**L2**
0.968	**31.77**	**10.22**	**41.99**	**56.00**	**-14.01**	**P**	**L2**

NOTE: The emission level was or more than 2dB below the Average limit, so no re-check anymore.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.2. RADIATED EMISSION MEASUREMENT

7.2.1. LIMITS

FREQUENCY (MHz)	Measured on a test site		Measured in situation
	Group 1, class A	Group 1, class B	Group 1, class A Limits with measuring distance 30 m from exterior wall outside the building in which the equipment is situated
	Quasi-peak (dBuV/m)	Quasi-peak (dBuV/m)	Quasi-peak (dBuV/m)
0.15 - 30	Under consideration	Under consideration	Under consideration
30 - 230	40	30	30
230 - 1000	47	37	37

NOTE: (1) The lower limit shall apply at the transition frequencies.
(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

7.2.2. TEST INSTRUMENTS

Open Area Test Site # I				
EQUIPMENT	**MFR**	**MODEL**	**SERIAL NUMBER**	**CAL. DUE**
MEASURE RECEIVER	SCHAFFNER	SCR3501	338	07/07/2010
SPECTRUM ANALYZER	ADVANTEST	R3132	120900008	No Calibration Required
ANTENNA	SCHAFFNER	CBL 6112B	2809	09/06/2010
AMPLIFIER	SCHAFFNER	CPA9231A	3626	10/12/2009
CABLE	BELDEN	9913	N-TYPE #I2	02/22/2010
THERMO-HYGRO METER	TECPEL	DTM-303	090639	05/24/2010
Test S/W	LAB VIEW 7.1			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.2.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-031)

Procedure of Preliminary Test


- The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is floor-standing equipment, it is placed on the ground plane that has a 15 cm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per EN 55011.
- All I/O cables were positioned to simulate typical usage as per EN 55011.
- The EUT received AC power source, 230VAC/50Hz, from the outlet socket under the turntable. All support equipment-received power from another socket under the turntable.
- The antenna was placed at 10 meter away from the EUT as stated in EN 55011. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.
- The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- The test mode(s) described in Item 3.2 were scanned during the preliminary test:
- After the preliminary scan, we found the test mode described in Item 3.2 producing the highest emission level.
- The worst configuration of EUT and cable, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

Procedure of Final Test

- EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.
- The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.
- The test data of the worst-case condition(s) was recorded.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.2.4. TEST SETUP

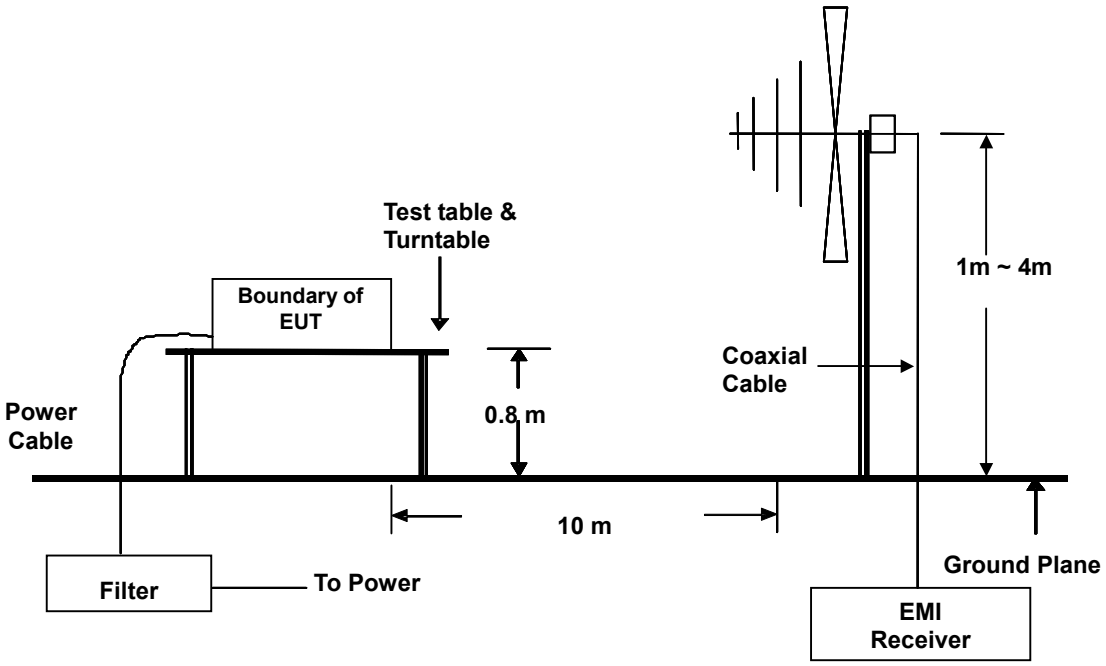

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.2.5. DATA SAMPLE:

Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/Q)	Pol. (H/V)
x.xx	14.0	12.2	26.2	30	-3.8	Q	H

Freq. = Emission frequency in MHz
Reading = Uncorrected Analyzer/Receiver reading
Factor = Antenna Factor + Cable Loss + Attenuator (3/6/10dB) – Amplifier Gain
Result = Uncorrected Analyzer/Receiver reading + Factor
Limit = Limit stated in standard
Margin = Reading in reference to limit
P = Peak Reading
Q = Quasi-peak Reading
H = Antenna Polarization: Horizontal
V = Antenna Polarization: Vertical

Calculation Formula

Margin (dB) = Level (dBuV/m) – Limit (dBuV/m)

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.2.6. TEST RESULTS

Model No.	ONYX-2122DTT	**Test Mode**	Mode 1
Environmental Conditions	25deg.C, 80% RH, 1010hPa	**6dB Bandwidth**	120 KHz
Antenna Pole	Vertical / Horizontal	**Antenna Distance**	10 m
Detector Function	Quasi-peak.	**Tested by**	ALEE SHEN

(The chart below shows the highest readings taken from the final data.)

Six Highest Radiated Emission Readings							
Frequency Range Investigated				**30 MHz to 1000 MHz at 10m**			
Freq (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector (P/Q)	Pol. (H/V)
138.244	**42.00**	**-16.86**	**25.14**	**30.00**	**-4.86**	**Q**	**V**
166.680	**43.50**	**-17.85**	**25.65**	**30.00**	**-4.35**	**Q**	**V**
250.004	**46.30**	**-14.53**	**31.77**	**37.00**	**-5.23**	**Q**	**V**
366.690	**43.00**	**-11.39**	**31.61**	**37.00**	**-5.39**	**Q**	**V**
480.005	**38.80**	**-8.48**	**30.32**	**37.00**	**-6.68**	**Q**	**V**
500.023	**38.10**	**-8.02**	**30.08**	**37.00**	**-6.92**	**Q**	**V**

Six Highest Radiated Emission Readings							
Frequency Range Investigated				**30 MHz to 1000 MHz at 10m**			
Freq (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector (P/Q)	Pol. (H/V)
216.010	**42.70**	**-17.99**	**24.71**	**30.00**	**-5.29**	**Q**	**H**
300.024	**44.90**	**-13.61**	**31.29**	**37.00**	**-5.71**	**Q**	**H**
366.687	**44.50**	**-11.39**	**33.11**	**37.00**	**-3.89**	**Q**	**H**
480.016	**38.70**	**-8.48**	**30.22**	**37.00**	**-6.78**	**Q**	**H**
500.019	**39.80**	**-8.02**	**31.78**	**37.00**	**-5.22**	**Q**	**H**
912.010	**33.90**	**-2.65**	**31.25**	**37.00**	**-5.76**	**Q**	**H**

NOTE: None.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.3. HARMONICS CURRENT MEASUREMENT

7.3.1. LIMITS OF HARMONICS CURRENT MEASUREMENT

Limits for Class A equipment	
Harmonics Order n	Max. permissible harmonics current A
Odd harmonics	
3	2.30
5	1.14
7	0.77
9	0.40
11	0.33
13	0.21
15<=n<=39	0.15x15/n
Even harmonics	
2	1.08
4	0.43
6	0.30
8<=n<=40	0.23x8/n

Limits for Class D equipment		
Harmonics Order n	Max. permissible harmonics current per watt mA/W	Max. permissible harmonics current A
Odd Harmonics only		
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
13	0.30	0.21
15<=n<=39	3.85/n	0.15x15/n

NOTE:

(1) Class A and Class D are classified according to item 7.4.3.

(2) According to section 7 of EN 61000-3-2, the above limits for all equipment except for lighting equipment having an active input power > 75 W and no limits apply for equipment with an active input power up to and including 75 W.

7.3.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Signal Conditioning Unit	Schaffner	CCN 1000-1	72122	11/23/2009
5KVA AC Power Source	Schaffner	NSG 1007	55131	11/23/2009
Software	Win2100V3.exe			

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.3.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-029)

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
- The classification of EUT is according to section 5 of EN 61000-3-2.
- The EUT is classified as follows:

  Class A: Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.


  Class B: Portable tools; Arc welding equipment which is not professional equipment.

  Class C: Lighting equipment.

  Class D: Equipment having a specified power less than or equal to 600 W of the following types: Personal computers and personal computer monitors and television receivers.

- The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

7.3.4. TEST SETUP

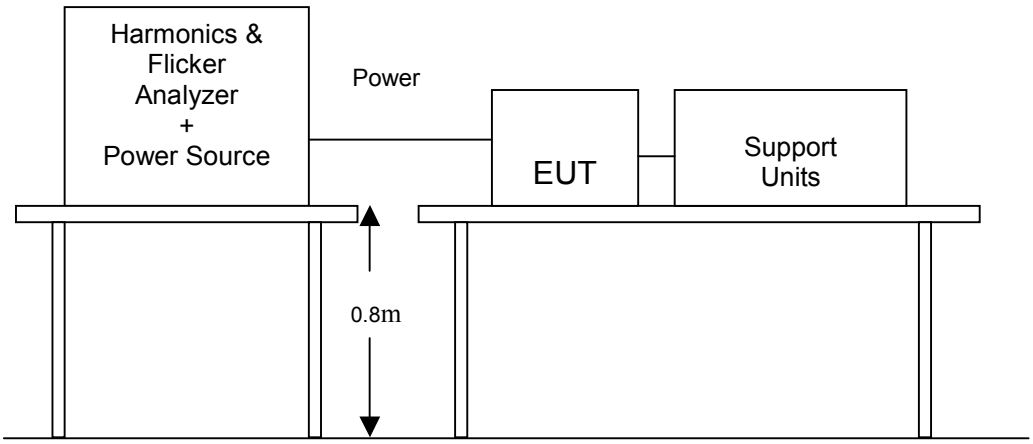

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.3.5. TEST RESULTS

Power Consumption	73.6W	**Test Mode**	Operating
Environmental Conditions	18°C, 58% RH, 1010mbar	**Tested by**	WILLY SHU

NOTE: 1. Limits classified according to item 7.3.3.
2. According to clause 7 of EN 61000-3-2: 2006, equipment with a rated power of 75W or less, no limits apply. The test result is only for reference.

TEST RESULT OF EN 61000-3-2

Highest parameter values during test:

V_RMS (Volts):	**230.07**	**Frequency(Hz):**	**50.00**
I_Peak (Amps):	**0.774**	**I_RMS (Amps):**	**0.363**
I_Fund (Amps):	**0.336**	**Crest Factor:**	**2.195**
Power (Watts):	**73.6**	**Power Factor:**	**0.905**

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.4. VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT

7.4.1. LIMITS OF VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT

TEST ITEM	LIMIT	REMARK
P_{st}	1.0	P_{st} means short-term flicker indicator.
P_{lt}	0.65	P_{lt} means long-term flicker indicator.
T_{dt} (ms)	500	T_{dt} means maximum time that dt exceeds 3.3 %.
d_{max} (%)	4%	d_{max} means maximum relative voltage change.
dc (%)	3.3%	dc means relative steady-state voltage change

7.4.2. TEST INSTRUMENTS

IMMUNITY SHIELDED ROOM				
Name of Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Signal Conditioning Unit	Schaffner	CCN 1000-1	72122	11/23/2009
5KVA AC Power Source	Schaffner	NSG 1007	55131	11/23/2009
Software	Win2100V3.exe			


NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.4.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-030)

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.
- During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

7.4.4. TEST SETUP

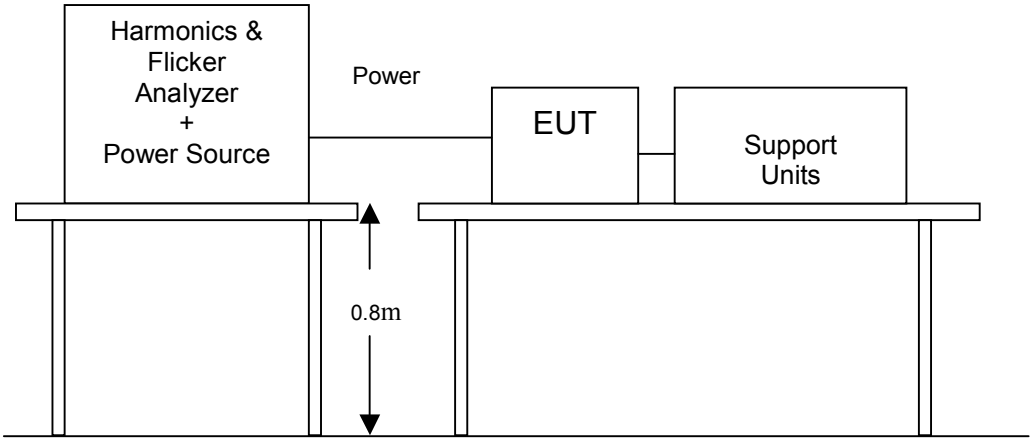

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.4.5. TEST RESULTS

Observation Period (Tp)	10mins	Test Mode	Operating
Environmental Conditions	18°C, 58% RH, 1010mbar	Tested by	WILLY SHU

TEST PARAMETER	MEASUREMENT VALUE	LIMIT	REMARK
P_{st}	0.064	1.0	Pass
P_{lt}	0.040	0.65	Pass
T_{dt} (ms)	0.0	500	Pass
d_{max} (%)	0.00	4%	Pass
dc (%)	0.00	3.3%	Pass

Note: None.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

TEST RESULT OF EN 61000-3-3

Test Result: Pass **Status: Test Completed**

Pst and limit line **European Limits**



Plt and limit line



Parameter values recorded during the test:

Vrms at the end of test (Volt):	**230.05**			
Highest dt (%):	**0.00**	**Test limit (%):**	**3.14**	**Pass**
Time(mS) > dt:	**0.0**	**Test limit (mS):**	**500.0**	**Pass**
Highest dc (%):	**0.00**	**Test limit (%):**	**3.14**	**Pass**
Highest dmax (%):	**0.00**	**Test limit (%):**	**3.80**	**Pass**
Highest Pst (10 min. period):	**0.064**	**Test limit:**	**0.950**	**Pass**
Highest Plt (2 hr. period):	**0.040**	**Test limit:**	**0.617**	**Pass**

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8 IMMUNITY TEST

8.1. GENERAL DESCRIPTION

Product Standard	Immunity	
	Test Type	Minimum Requirement
Basic Standard, Specification, and Performance Criterion required	IEC 61000-4-2	Electrostatic Discharge – ESD: 8kV air discharge, 6kV Contact discharge,
	IEC 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test – RS: 80 ~2500 MHz, 3V/m, 80% AM(2Hz),
	IEC 61000-4-4	Electrical Fast Transient/Burst - EFT, AC Power Port: 2kV Signal cable greater than 3 meters: 1kV
	IEC 61000-4-5	Surge Immunity Test: 1.2/50 us Open Circuit Voltage, 8 /20 us Short Circuit Current, AC Power Port ~ line to line: 1kV, line to earth (ground): 2kV
	IEC 61000-4-6	Conducted Radio Frequency Disturbances Test – CS: 0.15 ~ 80 MHz, 3Vrms, 80% AM, 2Hz,
	IEC 61000-4-8	Power frequency magnetic field immunity test 50 Hz, 3A/m
	IEC 61000-4-11	Voltage Dips: i) 100% reduction for 0.5 period, ii) 60% reduction for 5 period, iii) 30% reduction for 25 period, Voltage Interruptions: 100% reduction for 250 period

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.2. GENERAL PERFORMANCE CRITERIA DESCRIPTION

Compliance Criteria:

Under the test conditions specified in 36.202, the EQUIPMENT or SYSTEM shall be able to provide the ESSENTIAL PERFORMANCE and remain safe. The following DEGRADATIONS associated with ESSENTIAL PERFORMANCE and safety shall not be allowed:

- Component failures
- Changes in programmable parameters
- Reset to factory defaults (manufacturer's presets)
- Chang of operating mode
- False alarms
- Cessation or interruption of any intended operation, even if accompanied by an alarm
- Initiation of any unintended operation, including unintended or uncontrolled motion, even if accompanied by an alarm
- Error of a displayed numerical value sufficiently large to affect diagnosis or treatment
- Noise on a waveform in which the noise is indistinguishable from physiologically-produced signals or the noise interferes with interpretation of physiologically-produced signals
- Artefact or distortion in an image in which the artefact is indistinguishable from physiologically-produced signals or the distortion interferes with interpretation of physiologically-produced signals
- Failure of automatic diagnosis or treatment EQUIPMENT and SYSTEMS to diagnose or treat, even if accompanied by an alarm.

For EQUIPMENT and SYSTEMS with multiple FUNCTIONS, the criteria apply to each FUNCTION, parameter and channel.

The EQUIPMENT or SYSTEM may exhibit DEGRADATION of performance (e.g. deviation from manufacturer's specifications) that does not affect ESSENTIAL PERFORMANCE or safety.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.3. ELECTROSTATIC DISCHARGE (ESD)

8.3.1. TEST SPECIFICATION

Basic Standard:	IEC 61000-4-2
Discharge Impedance:	330 ohm / 150 pF
Discharge Voltage:	Air Discharge: 2 ; 4 ; 8 kV (Direct) Contact Discharge: 2 ; 4 ; 6 kV (Direct/Indirect)
Polarity:	Positive & Negative
Number of Discharge:	Minimum 10 times at each test point
Discharge Mode:	Single Discharge 1 second minimum

8.3.2. TEST INSTRUMENT

IMMUNITY SHIELDED ROOM				
Name of Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
ESD Simulator	Schaffner	NSG 438	170	08/20/2010
Aneroid Barometer	Sato	7610-20	89090	11/30/2009
Thermo-Hygro meter	TECPEL	DTM-303	No.7	11/24/2009

NOTE: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.3.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-022)

The discharges shall be applied in two ways:

a) Contact discharges to the conductive surfaces and coupling planes:
The EUT shall be exposed to at least 200 discharges, 100 each at negative and positive polarity, at a minimum of four test points. One of the test points shall be subjected to at least 50 indirect discharges to the center of the front edge of the **H**orizontal **C**oupling **P**lane (**HCP**). The remaining three test points shall each receive at least 50 direct contact discharges. If no direct contact test points are available, then at least 200 indirect discharges shall be applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second.


b) Air discharges at slots and apertures and insulating surfaces:
On those parts of the EUT where it is not possible to perform contact discharge testing, the equipment should be investigated to identify user accessible points where breakdown may occur. Such points are tested using the air discharge method. This investigation should be restricted to those area normally handled by the user. A minimum of 10 single air discharges shall be applied to the selected test point for each such area.

The basic test procedure was in accordance with IEC 61000-4-2:

a) The EUT was located 0.1 m minimum from all side of the **HCP** (dimensions 1.6m x 0.8m).
b) The support units were located another table 30 cm away from the EUT, but direct support unit was/were located at same location as EUT on the HCP and keep at a distance of 10 cm with EUT.
c) The time interval between two successive single discharges was at least 1 second.
d) Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
e) Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
f) At least ten single discharges (in the most sensitive polarity) were applied at the front edge of each **HCP** opposite the center point of each unit of the EUT and 0.1 meters from the front of the EUT. The long axis of the discharge electrode was in the plane of the **HCP** and perpendicular to its front edge during the discharge.
g) At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the **V**ertical **C**oupling **P**lane (**VCP**) in sufficiently different positions that the four faces of the EUT were completely illuminated. The **VCP** (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.3.4. TEST SETUP

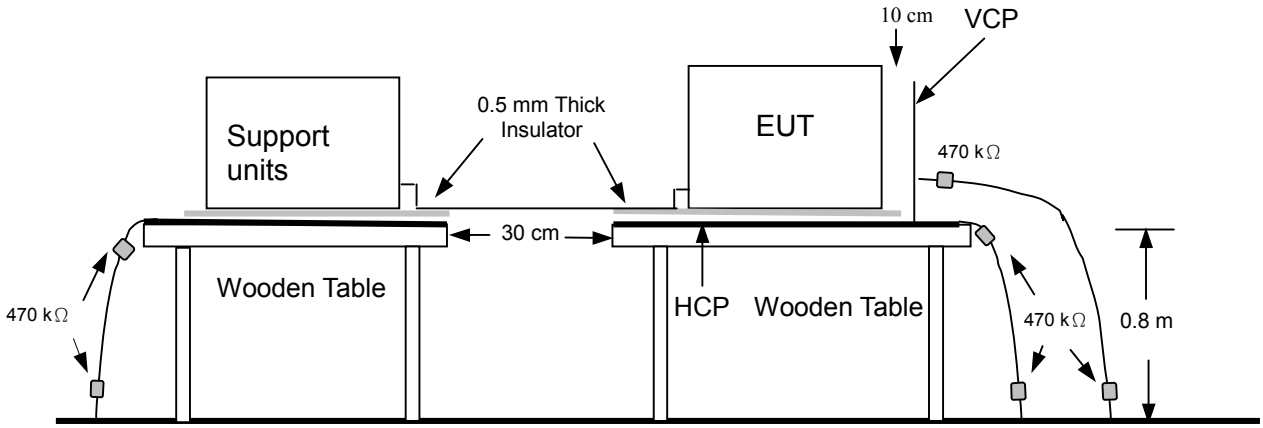

Ground Reference Plane

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the **G**round **R**eference **P**lane. The **GRP** consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A **H**orizontal **C**oupling **P**lane (1.6m x 0.8m) was placed on the table and attached to the **GRP** by means of a cable with 940k ¸ total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were placed on the **HCP** and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.3.5. TEST RESULTS

Temperature	18°C	**Humidity**	58% RH
Pressure	1010mbar	**Tested by**	WILLY SHU
Required Passing Performance	The Equipment or System shall be able to provide the essential performance and remain safe.		

Air Discharge								
Test Points	**Test Levels**			**Results**				
	± 2 KV	**± 4 KV**	**± 8 KV**	**Pass**	**Fail**	**Performance Criterion**	**Observation**	
Front	☒	☒	☒	☒	☐	☒A ☐B	Note ☒1	☐2
Back	☒	☒	☒	☒	☐	☒A ☐B	Note ☒1	☐2
Left	☒	☒	☒	☒	☐	☒A ☐B	Note ☐1	☒2
Right	☒	☒	☒	☒	☐	☒A ☐B	Note ☐1	☒2
Top	☒	☒	☒	☒	☐	☒A ☐B	Note ☐1	☒2
Bottom	☒	☒	☒	☒	☐	☒A ☐B	Note ☐1	☒2

Contact Discharge							
Test Points	**Test Levels**			**Results**			
	± 2 KV	**± 4 KV**	**± 6 KV**	**Pass**	**Fail**	**Performance Criterion**	**Observation**
Back	☒	☒	☒	☒	☐	☒A ☐B	Note ☒1 ☐2
Bottom	☒	☒	☒	☒	☐	☒A ☐B	Note ☒1 ☐2

Please refer to ESD test photo on next page for detail discharge point

Discharge To Horizontal Coupling Plane							
Side of EUT	**Test Levels**			**Results**			
	± 2 KV	**± 4 KV**	**± 6 KV**	**Pass**	**Fail**	**Performance Criterion**	**Observation**
Front	☒	☒	☒	☒	☐	☒A ☐B	Note ☒1 ☐2
Back	☒	☒	☒	☒	☐	☒A ☐B	Note ☒1 ☐2
Left	☒	☒	☒	☒	☐	☒A ☐B	Note ☒1 ☐2
Right	☒	☒	☒	☒	☐	☒A ☐B	Note ☒1 ☐2

Discharge To Vertical Coupling Plane							
Side of EUT	**Test Levels**			**Results**			
	± 2 KV	**± 4 KV**	**± 6 KV**	**Pass**	**Fail**	**Performance Criterion**	**Observation**
Front	☒	☒	☒	☒	☐	☒A ☐B	Note ☒1 ☐2
Back	☒	☒	☒	☒	☐	☒A ☐B	Note ☒1 ☐2
Left	☒	☒	☒	☒	☐	☒A ☐B	Note ☒1 ☐2
Right	☒	☒	☒	☒	☐	☒A ☐B	Note ☒1 ☐2

NOTE: 1. There was no change compared with initial operation during the test.
2. No Discharge point.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

The Photo for Discharge Points of EUT

Front



Back



Red Dot —Air Discharged
Blue Dot —Contact Discharged

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Bottom



Red Dot —Air Discharged
Blue Dot —Contact Discharged

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.4. RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD (RS)

8.4.1. TEST SPECIFICATION

Basic Standard:	IEC 61000-4-3
Frequency Range:	80 MHz ~2500 MHz,
Field Strength:	3 V/m
Modulation:	2Hz, 80%, AM Modulation
Frequency Step:	1 % of preceding frequency value
Polarity of Antenna:	Horizontal and Vertical
Test Distance:	3 m (Below 1GHz) & 1 m (Above 1GHz)
Antenna Height:	1.5 m

8.4.2. TEST INSTRUMENT

733 RS Chamber				
Name of Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Calibration of Field	N/A	Chamber#RS	Ver(Hor)-200805	06/16/2010
Signal Generator	Agilent	E4421B	MY43350597	05/21/2010
Electric Field Probe	AR	FP6001	305650	06/02/2010
RF Power Meter	Boonton	4231A	39601	08/16/2010
Amplifier	AR	100W1000M1	17564	No Calibration Required
Direction Coupler	AR	DC6180A	312189	No Calibration Required
Broadband Antenna	AR	AT1080	311819	No Calibration Required
Thermo-Hygro meter	TFA	N/A	NO.6	11/10/2009
Software	SW1005 Relrase 1.4.exe			

NOTE: *1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.*
2. N.C.R.= No Calibration required.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.4.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-023)

The test procedure was in accordance with IEC 61000-4-3


a) The testing was performed in a fully anechoic chamber. The transmit antenna was located at a distance of 3 (below 1GHz) or 1 (above 1GHz) meters from the EUT.

b) The frequency range is swept from 80 MHz to 2500 MHz, with the signal 80% amplitude modulated with a 2Hz. The rate of sweep did not exceed 1.5 x 10^{-3} decade/s, where the frequency range is swept incrementally, the step size was 1% of preceding frequency value.

c) The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.

e) The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

8.4.4. TEST SETUP

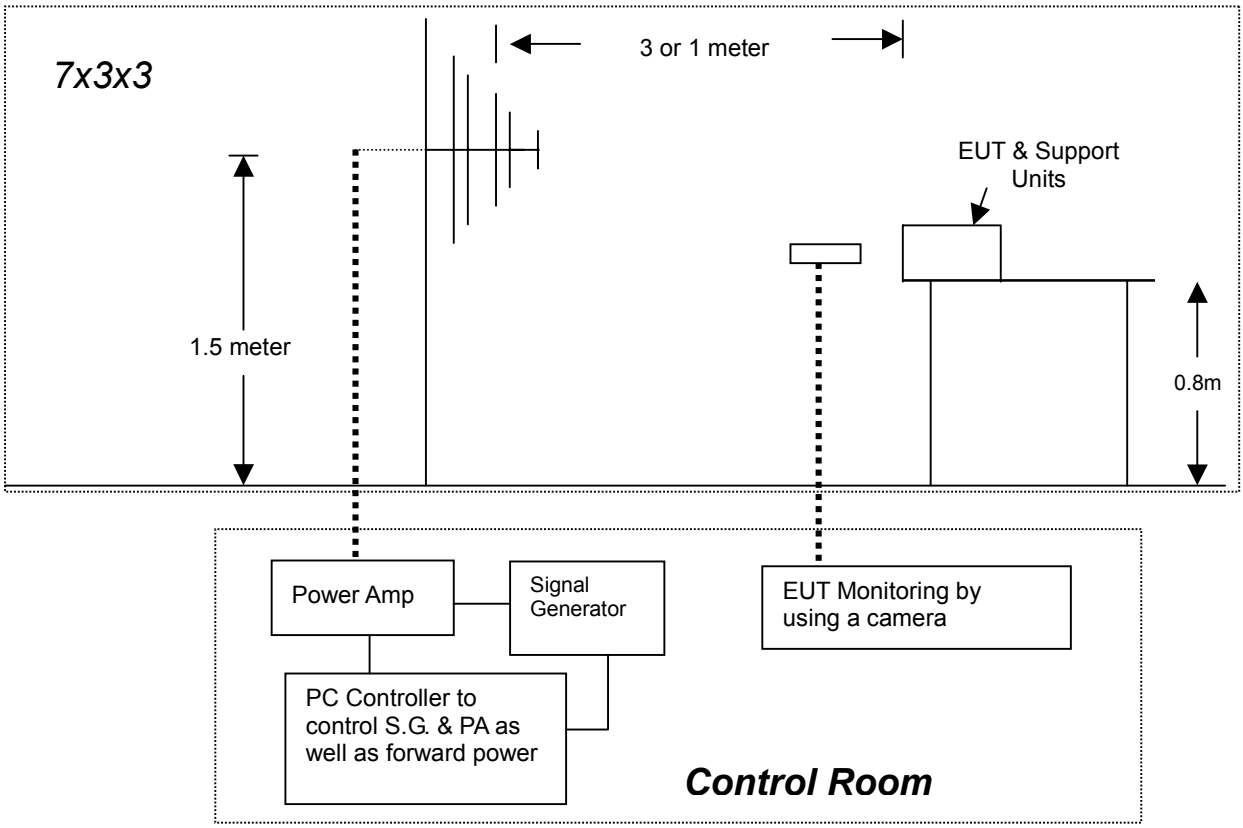

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

NOTE:

TABLETOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

8.4.5. TEST RESULTS

Temperature	20°C	**Humidity**	60% RH
Pressure	1010mbar	**Dwell Time**	3 sec.
Tested by	WILLY SHU		
Required Passing Performance	The Equipment or System shall be able to provide the essential performance and remain safe.		

Frequency (MHz)	Polarity	Azimuth	Field Strength (V/m)	Observation	Result
80 ~ 2500	V&H	0	3	Note 1	PASS
80 ~ 2500	V&H	90	3	Note 1	PASS
80 ~ 2500	V&H	180	3	Note 1	PASS
80 ~ 2500	V&H	270	3	Note 1	PASS

NOTE: There was no change compared with the initial operation during the test.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.5. ELECTRICAL FAST TRANSIENT (EFT)

8.5.1. TEST SPECIFICATION

Basic Standard:	IEC 61000-4-4
Test Voltage:	Power Line: 2 KV Signal/Control Line: 1 KV
Polarity:	Positive & Negative
Impulse Frequency:	5 kHz
Impulse Wave-shape:	5/50 ns
Burst Duration:	15 ms
Burst Period:	300ms
Test Duration:	Not less than 1 min.

8.5.2. TEST INSTRUMENT

Immunity Shield Room				
Name of Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
EFT Generator	Schaffner	BEST EMC V2.3	200031A024SC	11/09/2009
Capacitive Clamp	Schaffner	N/A	N/A	No Calibration Required
Software	WinBest.exe			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R.= No Calibration required

8.5.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-024)

a) Both positive and negative polarity discharges were applied.


b) The length of the "hot wire" from the coaxial output of the EFT generator to the terminals on the EUT should not exceed 0.5 meter.

c) The duration time of each test sequential was 1 minute.

d) The transient/burst waveform was in accordance with IEC 61000-4-4, 5/50ns.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.5.4. TEST SETUP

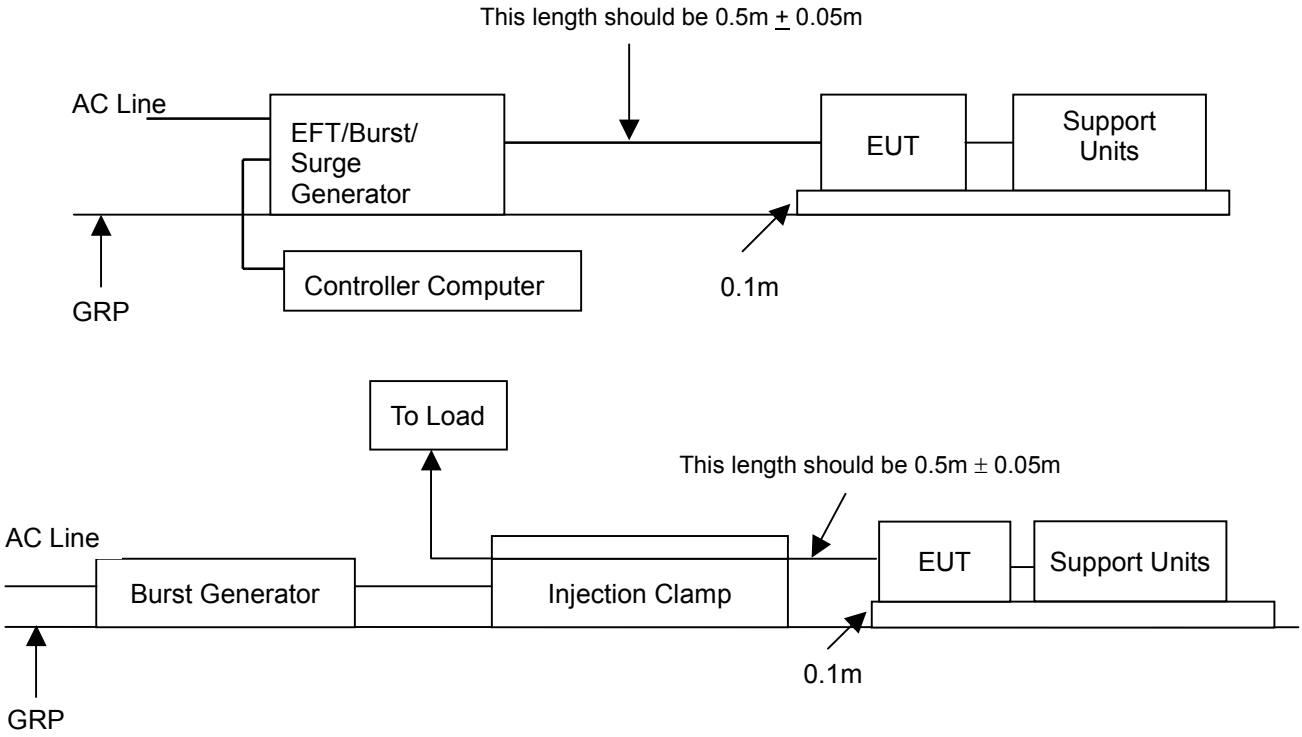

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:

TABLETOP EQUIPMENT

The configuration consisted of a wooden table (0.1m high) standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-4 and its cables, were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.5.5. TEST RESULTS

Temperature	18°C	**Humidity**	58% RH
Pressure	1010mbar	**Tested by**	WILLY SHU
Required Passing Performance	The Equipment or System shall be able to provide the essential performance and remain safe.		

Test Point	Polarity	Test Level (kV)	Inject Method	Observation	Result
L	+/-	2	Direct	Note 1	PASS
N	+/-	2	Direct	Note 1	PASS
PE	+/-	2	Direct	Note 1	PASS
L + N	+/-	2	Direct	Note 1	PASS
L + PE	+/-	2	Direct	Note 1	PASS
N + PE	+/-	2	Direct	Note 1	PASS
L +N +PE	+/-	2	Direct	Note 1	PASS
RJ45	+/-	1	Clamp	Note 1	PASS

NOTE: There was no change compared with initial operation during the test.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.6. SURGE IMMUNITY TEST

8.6.1. TEST SPECIFICATION

Basic Standard:	IEC 61000-4-5
Wave-Shape:	Combination Wave 1.2/50 us Open Circuit Voltage 8/20 us Short Circuit Current
Test Voltage:	AC Power Port ~ line to line: 1kV, line to earth (ground): 2kV
Surge Input/Output:	AC Power Port: L-N / L-PE / N-PE
Generator Source Impedance:	2 ohm between networks 12 ohm between network and ground
Polarity:	Positive/Negative
Phase Angle:	0° / 90° / 180° / 270°
Pulse Repetition Rate:	1 time / min. (maximum)
Number of Tests:	5 positive and 5 negative at selected points

8.6.2. TEST INSTRUMENT

Immunity Shield Room				
Name of Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Surger Generator	Schaffner	BEST EMC V2.3	200031A024SC	11/09/2009
Signal and Data Lines Coupling Network	Schaffner	CDN118	19328	No Calibration Required
Software	WinBest.exe			

NOTE: *(1) The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.*
(2) N.C.R.= No Calibration required

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.6.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-025)

a) For EUT power supply:

The surge is applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.


b) For test applied to unshielded un-symmetrically operated interconnection lines of EUT:

The surge was applied to the lines via the capacitive coupling. The coupling / decoupling networks didn't influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.

c) For test applied to unshielded symmetrically operated interconnection / telecommunication lines of EUT:

The surge was applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor were not specified. The interconnection line between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.

8.6.4. TEST SETUP

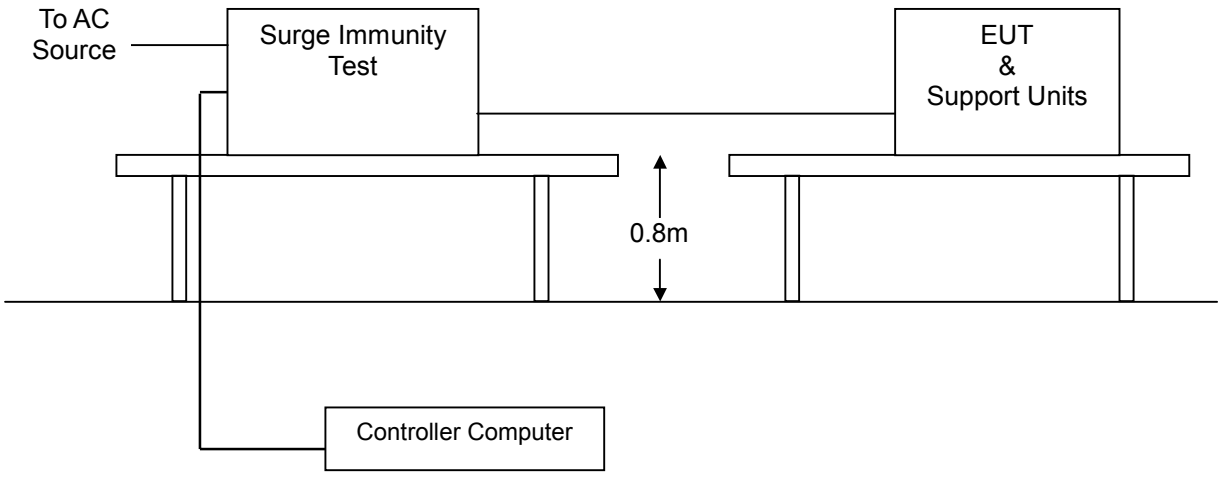

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.6.5. TEST RESULTS

Temperature	18°C	**Humidity**	58% RH
Pressure	1010mbar	**Tested by**	WILLY SHU
Required Passing Performance	The Equipment or System shall be able to provide the essential performance and remain safe.		

Test Point	Polarity	Test Level (kV)	Coupling Method	Observation	Result
L – N	+/-	1	Capacitive	Note 1	PASS
L - PE	+/-	2	Capacitive	Note 1	PASS
N - PE	+/-	2	Capacitive	Note 1	PASS

NOTE: 1. (a) There was no change compared with initial operation during the test.
(b) Where normal functioning of LAN can't be achieved because of the impact of CDN on the EUT, no test be required.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.7. CONDUCTED RADIO FREQUENCY DISTURBANCES (CS)

8.7.1. TEST SPECIFICATION

Basic Standard:	IEC 61000-4-6
Frequency Range:	0.15 MHz ~ 80 MHz
Field Strength:	3 Vrms
Modulation:	2Hz, 80%, AM Modulation
Frequency Step:	1 % of preceding frequency value
Coupled cable:	Power Mains, Unshielded; RJ45 Line, Unshielded
Coupling device:	CDN-M3 (3 wires), CDN-T8

8.7.2. TEST INSTRUMENT

CS Room				
Name of Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
RF Generator	Schaffner	NSG 2070-1	1061	07/30/2010
CDN	Schaffner	CDN M316	19600	07/29/2010
CDN	Schaffner	CDN M216	19294	07/29/2010
EM Clamp	Schaffner	KEMZ 801	19227	03/03/2010
CDN	Schaffner	CDN T002	15881	01/07/2010
CDN	Teseq	CDN T400A	25674	01/07/2010
CDN	Teseq	CDN T800	26155	01/07/2010
Attenuator	EMCI	SA3NL	10006F	No Calibration Required
Software	Win2070.exe			

NOTE: (1) The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
(2) N.C.R.= No Calibration required

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.7.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-026)

The EUT shall be tested within its intended operating and climatic conditions.

The test shell performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50-ohm load resistor.


The frequency range was swept from 150 kHz to 80 MHz, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal was modulated with a 2Hz, pausing to adjust the RF signal level or the switch coupling devices as necessary. The sweep rate was 1.5×10^{-3} decades/s. Where the frequency range is swept incrementally, the step size was 1 % of preceding frequency value from 150 kHz to 80 MHz.

The dwell time at each frequency was less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies such as clock frequency(ies) and harmonics or frequencies of dominant interest, was analyzed separately.

Attempts was made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.7.4. TEST SETUP

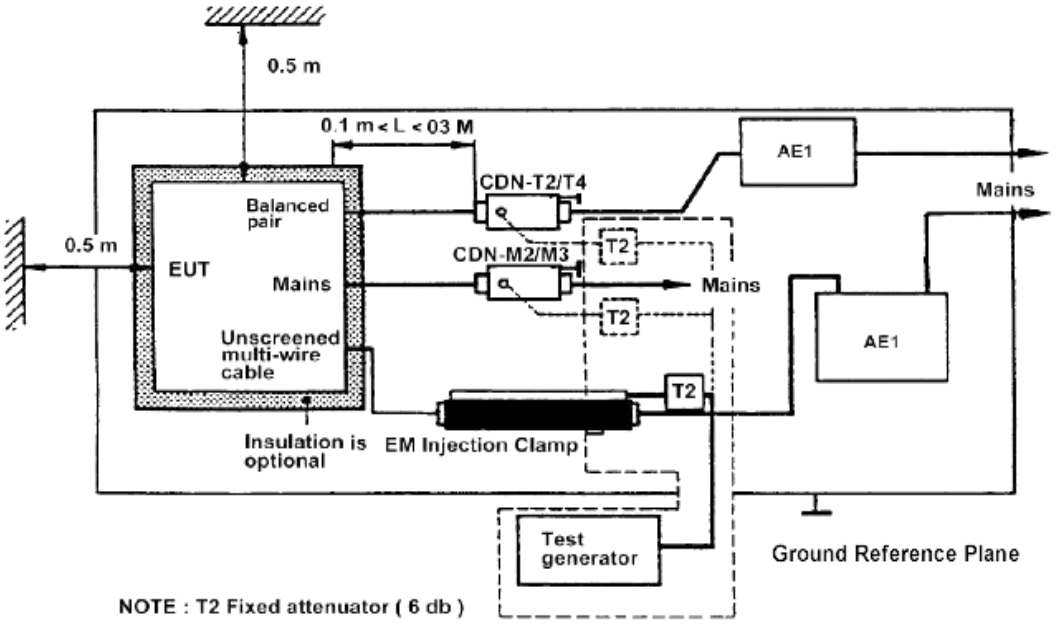

Note: 1. The EUT is setup 0.1m above Ground Reference Plane
2. The CDNs and / or EM clamp used for real test depends on ports and cables configuration of EUT.

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:

TABLE-TOP AND FLOOR-STANDING EQUIPMENT

The equipment to be tested was placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

8.7.5. TEST RESULTS

Temperature	20°C	**Humidity**	60% RH
Pressure	1010mbar	**Tested by**	WILLY SHU
Required Passing Performance	The Equipment or System shall be able to provide the essential performance and remain safe.		

Frequency Band (MHz)	Field Strength (Vrms)	Cable	Injection Method	Observation	Result
0.15 ~ 80	3	AC Power Line (0.3m)	CDN-M2	Note 1	PASS
0.15 ~ 80	3	RJ45 Line (0.3m)	CDN-T8	Note 1	PASS

NOTE: There was no change compared with initial operation during the test.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.8. POWER FREQUENCY MAGNETIC FIELD

8.8.1. TEST SPECIFICATION

Basic Standard:	IEC 61000-4-8
Frequency Range:	50Hz,
Field Strength:	3 A/m
Observation Time:	1 minute
Inductance Coil:	Rectangular type, 1mx1m

8.8.2. TEST INSTRUMENT

Immunity Shield Room				
Name of Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Induction Coil Interface	Schaffner	INA 21141	6009	No Calibration Required
5KVA AC Power Source	Schaffner	NSG 1007	55131	No Calibration Required
TRMS Clamp Meter	CHY	932C	995000273	06/14/2010
Magnetic Field Meter	Sypris	4080	0247	03/11/2010

NOTE: *1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.*
2. N.C.R.= No Calibration required.

8.8.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-027)

a) The equipment was configured and connected to satisfy its functional requirements. It shall be placed on the GRP with the interposition of a 0.1m-thick insulating support.


b. The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.

c. The power supply, input and output circuits shall be connected to the sources of power supply, control and signal.

d. The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.8.4. TEST SETUP

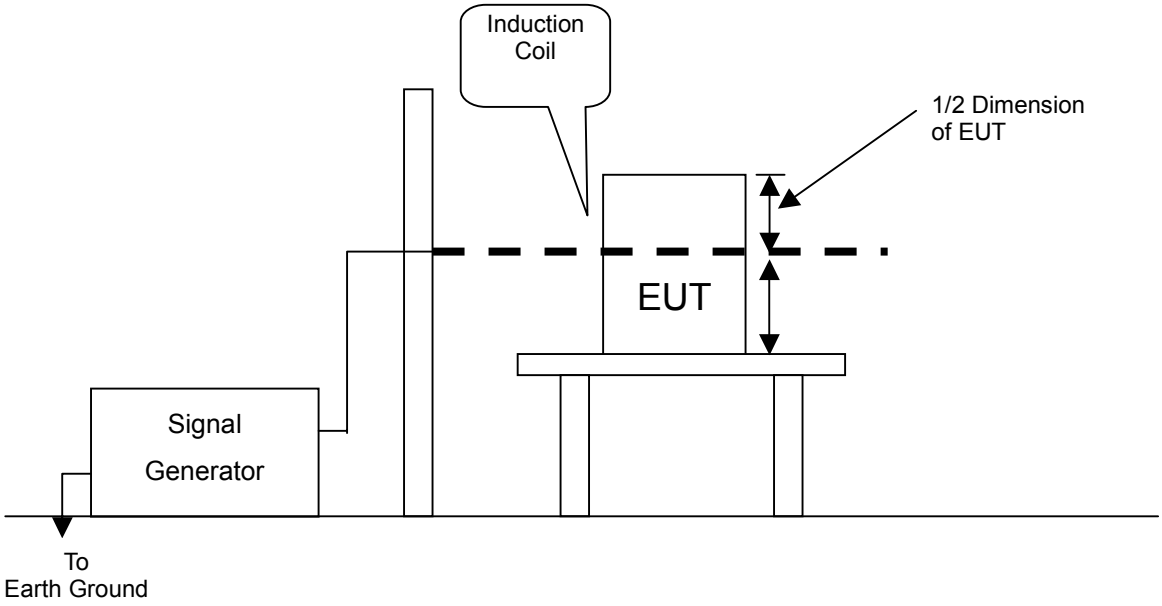

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:

TABLETOP EQUIPMENT

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

FLOOR-STANDING EQUIPMENT

The equipment shall be subjected to the test magnetic field by using induction coils of suitable dimensions. The test shall be repeated by moving and shifting the induction coils, in order to test the whole volume of the EUT for each orthogonal direction. The test shall be repeated with the coil shifted to different positions along the side of the EUT, in steps corresponding to 50 % of the shortest side of the coil. The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.8.5. TEST RESULTS

Temperature	18°C	**Humidity**	58% RH
Pressure	1010mbar	**Tested by**	WILLY SHU
Required Passing Performance	The Equipment or System shall be able to provide the essential performance and remain safe.		

Direction	Field Strength (A/M)	Observation	Results
X	3	Note 1	Pass
Y	3	Note 1	Pass
Z	3	Note 1	Pass

NOTE: There was no change compared with the initial operation during the test.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.9. VOLTAGE DIP & VOLTAGE INTERRUPTIONS

8.9.1. TEST SPECIFICATION

Basic Standard:	IEC 61000-4-11
Test duration time:	Minimum three test events in sequence
Interval between event:	Minimum 10 seconds
Angle:	0~360 degree
Step:	45 degree

8.9.2. TEST INSTRUMENT

Immunity shielded room				
Name of Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Signal Conditioning Unit	Schaffner	CCN 1000-1	72122	11/23/2009
5KVA AC Power Source	Schaffner	NSG 1007	55131	11/23/2009
Software	Win2100V3.exe			


NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R.= No Calibration required.

8.9.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-028)

1. The EUT and support units were located on a wooden table, 0.8 m away from ground floor.
2. Setting the parameter of tests and then perform the test software of test simulator.
3. Conditions changes to occur at 0 degree crossover point of the voltage waveform.
4. Recording the test result in test record form.
5. Removes the Battery Pack to test if any.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8.9.4. TEST SETUP

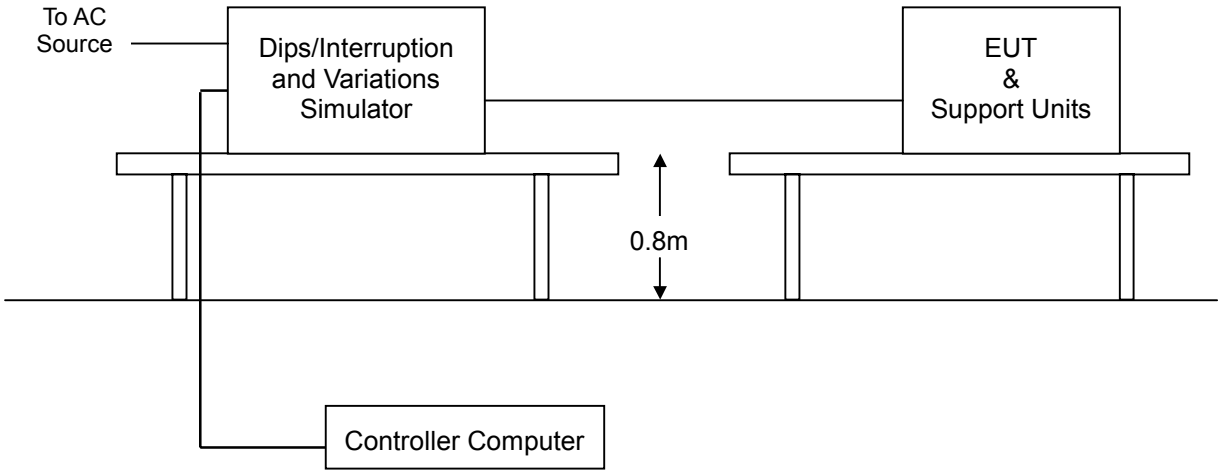

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

8.9.5. TEST RESULTS

Temperature	18°C	**Humidity**	58% RH
Pressure	1010mbar	**Tested by**	WILLY SHU
Required Passing Performance	The Equipment or System shall be able to provide the essential performance and remain safe.		

Voltage Dips:

Test Level % UT	Reduction (%)	Duration (periods)	Observation	Result
0	100	0.5	Note 1	PASS
40	60	5	Note 1	PASS
70	30	25	Note 1	PASS

Voltage Interruptions:

Test Level % UT	Reduction (%)	Duration (periods)	Observation	Result
0	100	250	Note 2	PASS

NOTE: 1. There was no change compared with initial operation during and after the test. No unintentional response was found during the test.
2. EUT shut down, it could not become normal except reinstalled by operator.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

9 PHOTOGRAPHS OF THE TEST CONFIGURATION

LINE CONDUCTED EMISSION TEST (EN 55011)





This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

RADIATED EMISSION TEST (EN 55011)






This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

POWER HARMONIC & VOLTAGE FLUCTUATION / FLICKER TEST




ELECTROSTATIC DISCHARGE TEST

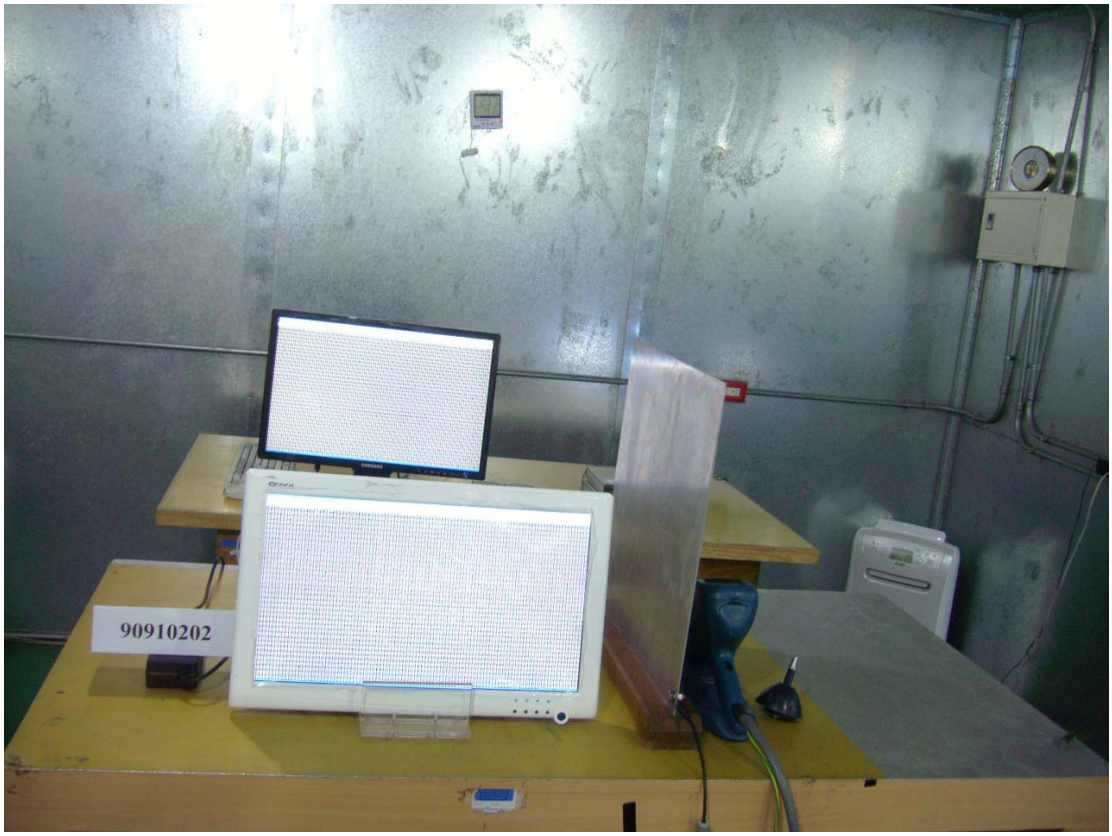

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

RADIATED ELECTROMAGNETIC FIELD TEST

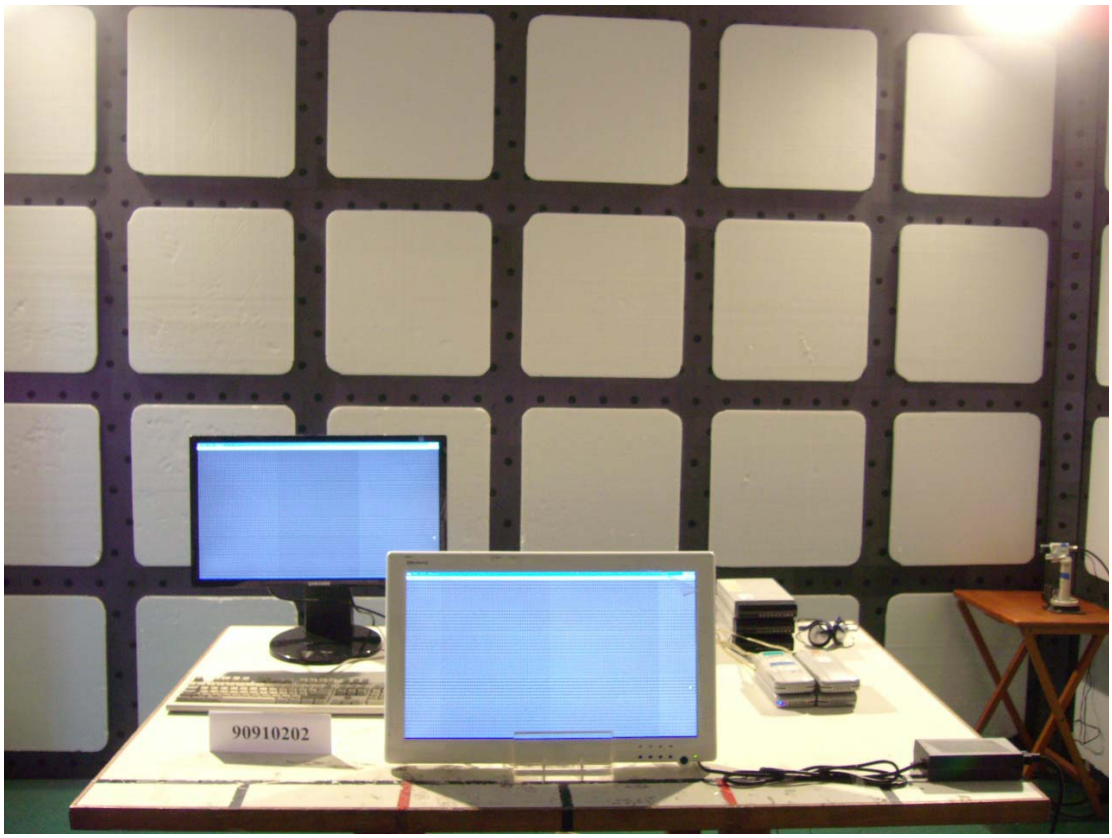

FAST TRANSIENTS/BURST TEST



This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

(IEC 61000-4-4 FOR I/O)



SURGE IMMUNITY TEST



This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

CONDUCTED DISTURBANCE, INDUCED BY RADIO-FREQUENCY FIELDS TEST



(IEC 61000-4-6 FOR I/O)



This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST



VOLTAGE DIPS / INTERRUPTION TEST



This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.