



# EMC

## TEST REPORT

REPORT NO. : CE88050602  
MODEL NO. : PCM-5896, PCM-6890  
DATE OF TEST : May 06 ~ May 19, 1999

PREPARED FOR: AAEON TECHNOLOGY INC.

ADDRESS : 1F, NO. 6, ALLEY 6, LANE 45, PAO-HSIN RD.,  
HSIN-TIEN CITY, TAIPEI, TAIWAN, R.O.C.

PREPARED BY: ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory

11F, NO.1, SEC.4, NAN-KING EAST RD.,  
TAIPEI, TAIWAN, R.O.C.

This test report consists of 34 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory. It should not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. government. The test result in the report only applies to the tested sample.



## TABLE OF CONTENTS

1. CERTIFICATION .....	3
2. GENERAL INFORMATION .....	4
2.1 GENERAL DESCRIPTION OF EUT .....	4
2.2 GENERAL DESCRIPTION OF APPLIED STANDARD .....	4
2.3 DESCRIPTION OF SUPPORT UNITS .....	5
2.4 TEST SETUP .....	6
3. TEST INSTRUMENTS .....	7
3.1 TEST INSTRUMENTS (EMISSION) .....	7
3.2 TEST INSTRUMENTS (IMMUNITY) .....	8
3.3 LIMITS OF CONDUCTED AND RADIATED EMISSION .....	9
4. TEST RESULTS (EMISSION) .....	10
4.1 RADIO DISTURBANCE .....	10
4.2 EUT OPERATION CONDITION .....	10
4.3 TEST DATA OF CONDUCTED EMISSION (A) .....	11
4.4 TEST DATA OF CONDUCTED EMISSION (B) .....	13
4.5 TEST DATA OF RADIATED EMISSION (A) .....	15
4.6 TEST DATA OF RADIATED EMISSION (B) .....	17
5. TEST RESULTS (IMMUNITY) .....	19
5.1 GENERAL DESCRIPTION .....	19
5.2 PERFORMANCE CRITERIA DESCRIPTION .....	19
5.3 EUT OPERATION CONDITION .....	19
5.4 TEST RESULT OF ELECTROSTATIC DISCHARGE (ESD) .....	20
5.5 TEST RESULT OF RADIATED RADIO FREQUENCY .....	21
5.6 TEST RESULT OF ELECTRICAL FAST TRANSIENT/BURST (EFT/BURST) .....	22
5.7 TEST RESULT OF CONDUCTED RADIO FREQUENCY DISTURBANCES (CS) .....	23
5.8 TEST RESULT OF POWER FREQUENCY MAGNETIC FIELD .....	24
5.9 TEST RESULT OF RADIO-FREQUENCY ELECTROMAGNETIC .....	25
6. PHOTOGRAPHS OF THE TEST CONFIGURATION .....	26
7. APPENDIX - INFORMATION OF THE TESTING LABORATORY .....	34



1. CERTIFICATION

Issue date: May 24, 1999

Product : CPU BOARD  
 Trade Name : AAEON  
 Model No. : PCM-5896, PCM-6890  
 Applicant : AAEON TECHNOLOGY INC.  
 Standard : EN 55022:1994+A1:1995+A2:1997, **EN 50082-2:1995**  
 Class A EN 61000-4:2:1995  
 EN 61000-4-3:1996  
 EN 61000-4-4:1995  
 EN 61000-4-6:1996  
 EN 61000-4-8:1994  
 ENV 50204:1996

We hereby certify that one sample of the designation has been tested in our facility from May 06 to May 19, 1999. The test record, data evaluation and Equipment Under Test (EUT) configurations represent herein are true and accurate representation of the measurements of the sample's EMC characteristics under the conditions herein specified.

TESTED BY : Jackey Chang DATE: 5/24/99  
( Emission ) ( Jackey Chang )

TESTED BY : S.S Wang , DATE: 5/24/99  
( Immunity ) ( S. S. Wang )

CHECKED BY : Stacy Chang , DATE: 5/24/99  
( Stacy Chang )

APPROVED BY : Mike Su , DATE: 5/24/99  
( Mike Su )

ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Product : CPU BOARD  
Model No. : PCM-5896, PCM-6890  
Power Supply : Switching (from PC)

Note: During the test, the EUT was installed in a metal enclosure with a slot board to form an industrial PC.

The EUT has two model names which are identical to each other in all aspects except for their CPU and CPU socket. Both of the two models were tested separately and recorded in this report in two modes.

	MODE 1	MODE 2
<b>MODEL</b>	PCM-5896	PCM-6890
<b>CPU</b>	AMD, K6-2, 400MHz ( 100MHz x 4 )	INTEL CELERON™ processor 400MHz ( 66.6MHz x 6 )
<b>CPU SOCKET</b>	INTEL SOCKET 7	INTEL SOCKET 370
<b>HDD</b>	IBM, DHEA-34330	
<b>FDD</b>	TEAC, FD-235HF	
<b>CHASSIS</b>	AAEON, AIPC-110	
<b>SPS</b>	SEVENTEAM, ST-250GL	

The EUT has a resolution up to 1024x768, 256 color.

For more detailed features description, please refer to Manufacturer's Specification or User's Manual.

### 2.2 GENERAL DESCRIPTION OF APPLIED STANDARD

The EUT is a kind of Information Technology Equipment which could be used in industrial area and according to the manufacturer's specifications, it was tested according to the following standards:

EN 55022:1994+A1:1995+A2:1997, Class A

**EN 50082-2:1995**

EN 61000-4-2:1995

EN 61000-4-3:1996

EN 61000-4-4:1995

EN 61000-4-6:1996

EN 61000-4-8:1994

ENV 50204:1996

All tests are performed and recorded as per above standards.



## 2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories are used to form representative test configuration during the tests.

### FOR EMISSION TEST

No	Product	Brand	Model No.	Serial No.	I/O Cable
1	COLOR MONITOR	ADI	PD-959	730020U00100291	Nonshielded Signal (1.5m) Shielded Power (1.8m)
2	PRINTER	HP	2225C+	3030S79116	Nonshielded Signal (1.2m) Shielded Power (1.5m)
3	MODEM	ACEEX	1414	980020540	Shielded signal (1.2m) Nonshielded Power (1.5m)
4	MODEM	ACEEX	1414	980020534	Shielded signal (1.2m) Nonshielded Power (1.5m)
5	MODEM	ACEEX	1414	980020532	Shielded signal (1.2m) Nonshielded Power (1.5m)
6	MODEM	ACEEX	1414	980020538	Shielded signal (1.2m) Nonshielded Power (1.5m)
7	KEYBOARD	BTC	5140	75B110606	Shielded Signal (1.2m)
8	MOUSE	DEXIN	A2P800A	80102114	Shielded signal (1.5m)
9	USB KEYBOARD	BTC	7932	178190004	Shielded Signal (1.8m)
10	USB MOUSE	DEXIN	A2U800A	71001821	Shielded Signal (1.5m)
11	PC	IBM	6560-T7T	9983708	Nonshielded power (1.8m) Shielded Signal (1.8m)
12	MONITOR	ADI	7133D	M133D022087	Shielded signal (1.5m) Nonshielded power (1.8m)
13	KEYBOARD	FORWARD	FDA-104GA	FDKB8110112	Nonshielded signal (1.5m)
14	MOUSE	DEXIN	A2P800A	80102130	Shielded signal (1.5m)
15	LAN CARD	INTEL	S82555	00A0C9A6CB5252 71	Shielded signal (10.0m)

Note: 1. Support unit 1~10 acted as SERVER PC and communicated with support unit 11~15 which acted as HOST PC and systems of communication partner via a UTP cable (10m).

2. Support unit 9 & 10 were connected to the USB ports of EUT.



## FOR IMMUNITY TEST

No	Product	Brand	Model No.	Serial No.	I/O Cable
1	COLOR MONITOR	ACER	7254e	9171602003	Nonshielded Signal (1.5m) Shielded Power (1.8m)
2	PRINTER	HP	C2145A	SG59N16035	Nonshielded Signal (1.5m) Shielded Power (1.8m)
3	MODEM	ACEEX	1414	980020527	Shielded signal (1.25m) Nonshielded Power (1.5m)
4	MODEM	ACEEX	1414	980020514	Shielded signal (1.25m) Nonshielded Power (1.5m)
5	MODEM	ACEEX	1414	980020528	Shielded signal (1.25m) Nonshielded Power (1.5m)
6	MODEM	ACEEX	1414	980020525	Shielded signal (1.25m) Nonshielded Power (1.5m)
7	KEYBOARD	BTC	5140	75B110606	Shielded Signal (1.8m)
8	MOUSE	DEXIN	A2P800A	80102121	Shielded signal (1.5m)
9	CCD CAMERA	COMPAQ	YC72-CPQ	G06CC0A7AEB21Y	Shielded Signal (2.0m)
10	CCD CAMERA	COMPAQ	YC72-CPQ	G06CC0A7AEB22Y	Shielded Signal (2.0m)
11	PC	IBM	6560-T7T	90A54WX	Nonshielded power (1.0m) Shielded Signal (1.8m)
12	MONITOR	ACER	7234e	9174302003	Shielded signal (1.5m) Nonshielded power (1.8m)
13	KEYBOARD	ACER	6311	K6355122516	Nonshielded signal (1.5m)
14	MOUSE	DEXIN	A2P800A	80102107	Shielded signal (1.5m)
15	LAN CARD	INTEL	S82555	00A0C9659E5C17713	Shielded signal (10m)

Note: 1. Support unit 1~10 acted as SERVER PC and communicated with support unit 11~15 which acted as HOST PC and systems of communication partner via a UTP cable (10m).

2. Support unit 9 & 10 were connected to the USB ports of EUT.

## 2.4 TEST SETUP

Please refer to the photos of test configuration in Item 6.



### 3. TEST INSTRUMENTS

#### 3.1 TEST INSTRUMENTS (EMISSION)

##### CONDUCTED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 22, 1999
ROHDE & SCHWARZ Artificial Mains Network	ESH2-Z5	892107/003	July 20, 1999
EMCO L.I.S.N.	3825/2	9504-2359	July 20, 1999
Shielded Room	Site 3	ADT-C03	NA

- Note: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

##### RADIATED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
HP Spectrum Analyzer	8594E	3412A01132	Sept. 24, 1999
CHASE Preamplifier	CPA9231A/4	3215	Nov. 1, 1999
HP Preamplifier	8347A	3307A01088	Sept. 9, 1999
ROHDE & SCHWARZ TEST RECEIVER	ESVS 10	846285/012	Dec. 14, 1999
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 25, 1999
CHASE BILOG Antenna	CBL6112	2074	Dec. 25, 1999
EMCO Double Ridged Guide Antenna	3115	9312-4192	April 5, 2000
CHANCE Turn Table & Tower Controller	ACS-I	NA	NA
Open Field Test Site	Site 6	ADT-R06	Dec. 24, 1999

- Note: 1. The measurement uncertainty is less than +/- 3dB, which is calculated as per NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.



### 3.2 TEST INSTRUMENTS (IMMUNITY)

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
KeyTek, ESD Test System	2000	9105240/41	Aug. 9, 1999
KeyTek, ESD Simulator	MZ-15/EC	92022232	April 14, 2000
KeyTek, EFT Generator	CE-40	9508257	Sept. 8, 1999
KeyTek, Capacitive Clamp	CE-40-CCL	9508259	Sept. 9, 1999
KeyTek, Control Center	E103	9508347	NA
KeyTek, Surge Combination Wave	E501A	9508349	Sept. 3, 1999
KeyTek, Surge Coupler/Decoupler	E551	9508350	Sept. 3, 1999
ROHDE & SCHWARZ Signal Generator	SMY01	840490/009	Sept. 30, 1999
KALMUS Power Amplifier	LA1000V	091995-1	NA
KALMUS Power Amplifier	757LC	091995-2	NA
HOLADAY Field Probe	HI-4422	89915	Oct. 27, 1999
EMCO BiconiLog Antenna	3141	1001	NA
FCC Coupling Decoupling Network	FCC-801-M3-25	48	NA
FCC Coupling Decoupling Network	FCC-801-M2-25	20	NA
FCC Coupling Decoupling Network	FCC-801-M1-25	17	NA
BOONTON RF Voltage Meter	9200B	331801AE	Dec. 17, 1999
COMTEST Compact Full Anechoic Chamber (7x3x3 m)	CFAC	ADT-S01	Aug. 4, 1999
HAEFELY Mains Interference Simulator	PLINE 1610	083690-17	July 6, 1999
HAEFELY Magnetic Field Tester	MAG 100.1	083794-06	NA
COMBINOVA Magnetic Field Meter	MFM10	224	Aug. 26, 1999

Note: The calibration interval of the above test instruments is 12 months.

And the calibrations are traceable to NML/ROC and NIST/USA.





### 3.3 LIMITS OF CONDUCTED AND RADIATED EMISSION

#### LIMIT OF RADIATED EMISSION OF EN 55022

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 - 230	40	30
230 - 1000	47	37

Note: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### LIMIT OF CONDUCTED EMISSION OF EN 55022

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)0	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



## 4. TEST RESULTS (EMISSION)

### 4.1 RADIO DISTURBANCE

Product Family Standard : EN 55022+A1:1995+A2:1997, Class B  
Frequency Range : 0.15 - 30 MHz (Conducted Emission)  
30 - 1000 MHz (Radiated Emission)  
Input Voltage : 230 Vac, 50 Hz (to PC)  
Temperature : 22 °C  
Humidity : 62 %  
Atmospheric Pressure : 1006 mbar

TEST RESULT	Remarks
<b>PASS</b>	Minimum passing margin of conducted emission: -26.8 dB at 19.488 MHz Minimum passing margin of radiated emission: -4.0 dB at 350.00 MHz

### 4.2 EUT OPERATION CONDITION

1. Turn on the power of all equipment.
2. Industrial PC reads a test program to enable all functions.
3. Industrial PC reads and writes messages from HDD.
4. Industrial PC sends and receives messages to and from HOST PC via a UTP cable.
5. Industrial PC sends "H" messages to monitor and monitor display "H" patterns on screen.
6. Industrial PC sends "H" messages to modem.
7. Industrial PC sends "H" messages to printer, and the printer prints them on paper.
8. Repeat steps 2-8.



### 4.3 TEST DATA OF CONDUCTED EMISSION (A)

EUT: CPU BOARD

MODEL: PCM-5896

6 dB Bandwidth: 10 kHz

MODE: 1

PHASE: LINE (L)

Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
		[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.150	0.1	36.8	-	36.9	-	79.0	66.0	-42.1	-
0.306	0.2	32.6	-	32.8	-	79.0	66.0	-46.2	-
4.441	0.5	30.2	-	30.7	-	73.0	60.0	-42.3	-
6.083	0.5	42.5	-	43.0	-	73.0	60.0	-30.0	-
13.007	0.8	40.3	-	41.1	-	73.0	60.0	-31.9	-
19.487	1.2	44.5	-	45.7	-	73.0	60.0	-27.3	-
24.741	1.4	44.2		45.6		73.0	60.0	-27.3	


- Remarks:
1. "\*\*\*": Undetectable
  2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": The Quasi-peak emission level also meets average limit and measurement with the average detector is unnecessary.
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

EUT: PCH-5898  
Op Cond: 1024X768 256 COLOR  
Operator: JACKY  
Test Spec: LISN : L  
Comment: 230V AC/50Hz  
MODE S: KE-2 400kHz (100kHz)

Report No. *C288050602*  
Page (1-)  
Tested by *Jacky Chang*

Fast Scan Settings (3 Ranges)

Frequencies				Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpAmp
100k	450k	3k	10K	PK	0.05ms	10dB LN	OFF	80dB
450k	5M	3k	10K	PK	0.05ms	10dB LN	OFF	80dB
5M	30M	3k	10K	PK	0.05ms	10dB LN	OFF	80dB

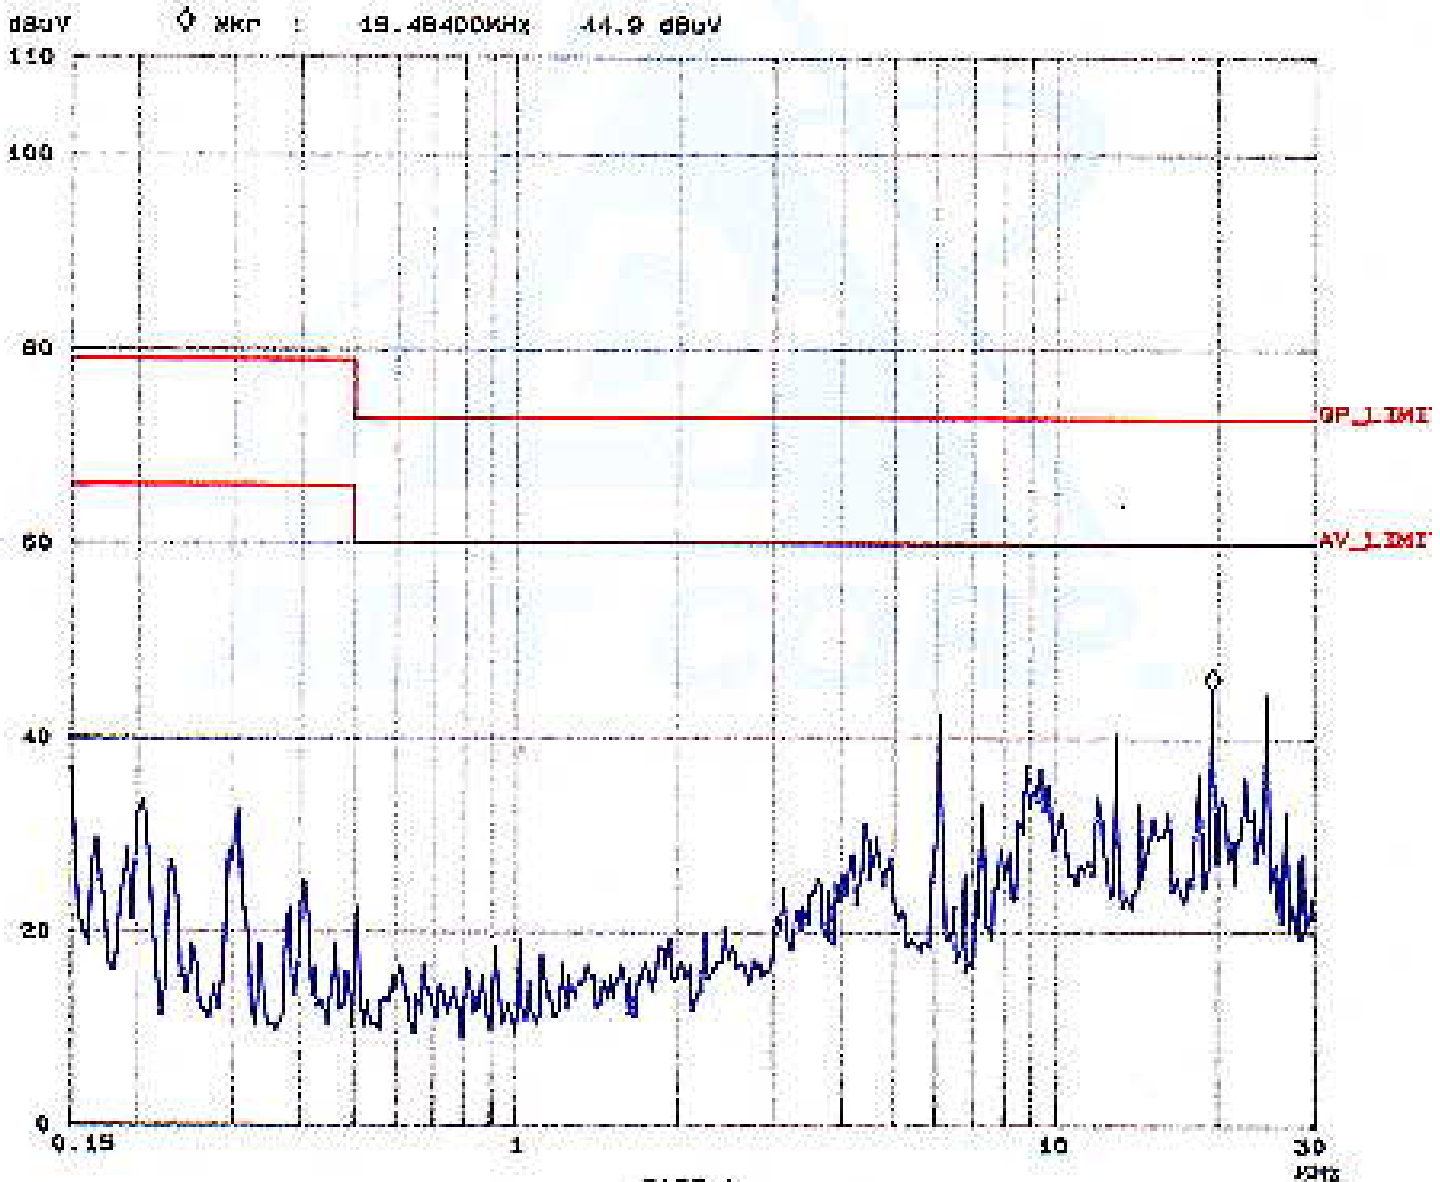



## TEST DATA OF CONDUCTED EMISSION (A)

EUT: CPU BOARD

MODEL: PCM-5896

6 dB Bandwidth: 10 kHz

MODE: 1

PHASE: NEUTRAL (N)

Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
		[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.150	0.1	37.6	-	37.7	-	79.0	66.0	-41.3	-
0.306	0.2	27.2	-	27.4	-	79.0	66.0	-51.6	-
4.441	0.4	26.9	-	27.3	-	73.0	60.0	-45.7	-
6.083	0.4	42.5	-	42.9	-	73.0	60.0	-30.1	-
13.007	0.6	42.8	-	43.4	-	73.0	60.0	-29.6	-
19.487	0.7	44.2	-	44.9	-	73.0	60.0	-28.1	-
24.741	0.8	44.0		44.8		73.0	60.0	-28.1	


- Remarks:
1. "\*": Undetectable
  2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": The Quasi-peak emission level also meets average limit and measurement with the average detector is unnecessary.
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

EUT: PCN-9336  
 Op Cond: 1024X768 286 COLOR  
 Operator: JACKEY  
 Test Spec: LIGN : N  
 Comment: 230V AC/50Hz  
 MODE 1: K8-2 400MHz (100kHz)

Report No. CE88050602  
 Page 17-1  
 Tested by Jack Key Chong

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	ZF BW	Detector	H-Tune	Atten	Preamp	OpAmp
150k	450k	3K	10k	PK	0.05ns	10dB	OFF	80dB
450k	5M	3K	10k	PK	0.05ns	10dB	OFF	80dB
5M	30M	3K	10k	PK	0.05ns	10dB	OFF	80dB

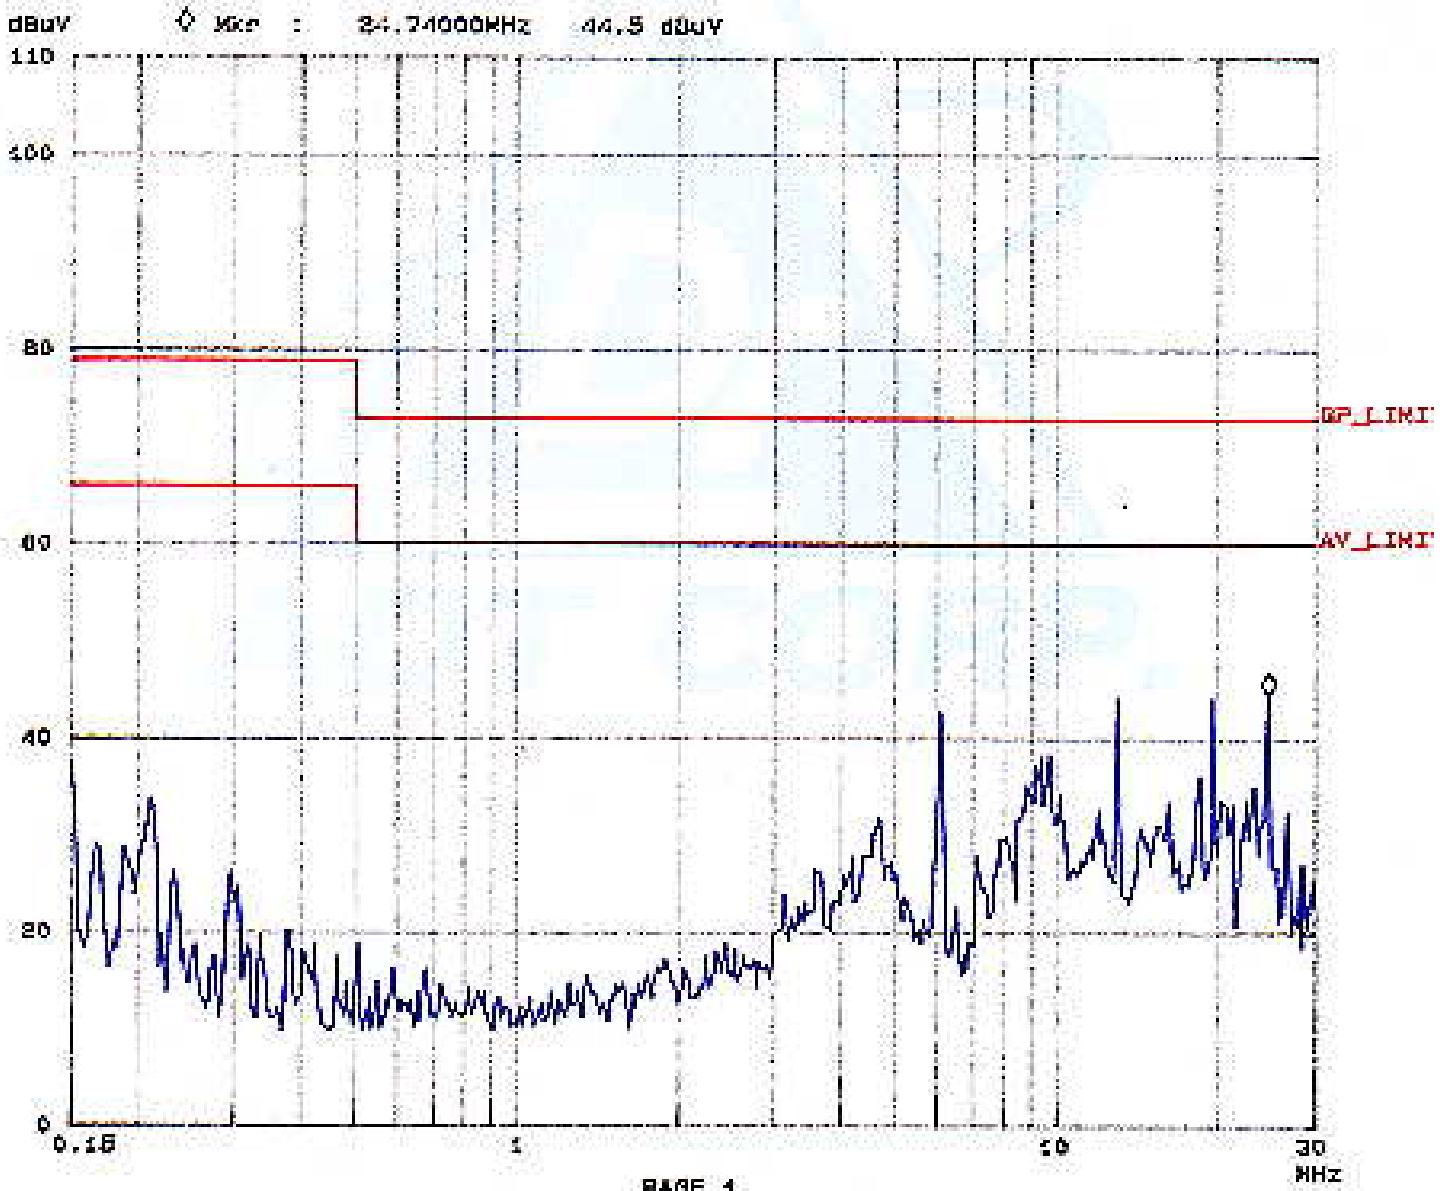



#### 4.4 TEST DATA OF CONDUCTED EMISSION (B)

EUT: CPU BOARD

MODEL: PCM-6890

6 dB Bandwidth: 10 kHz

MODE: 2

PHASE: LINE (L)

Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
		[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.151	0.1	36.9	-	37.0	-	79.0	66.0	-42.0	-
0.306	0.2	30.5	-	30.7	-	79.0	66.0	-48.3	-
4.440	0.5	30.1	-	30.6	-	73.0	60.0	-42.4	-
6.086	0.5	42.4	-	42.9	-	73.0	60.0	-30.1	-
13.006	0.8	40.9	-	41.7	-	73.0	60.0	-31.3	-
19.488	1.2	45.0	-	46.2	-	73.0	60.0	-26.8	-


- Remarks:
1. "\*\*\*": Undetectable
  2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": The Quasi-peak emission level also meets average limit and measurement with the average detector is unnecessary.
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

EVT: PCH-6880  
 Op Cond: 1024X768 256 COLOR  
 Operator: JACKEY  
 Test Spec: LISN : L  
 Comment: 230V AC/50Hz  
 MODE 2: CELERON 400MHz (66.6MHz)

Report No. CE 88050602  
 Page 13-1  
 Tested by Jackey Chenoz

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	Gain	
150k	450k	3k	10k	PK	0.05ms	10dB	OFF	60dB	
450k	9k	3k	10k	PK	0.05ms	10dB	OFF	60dB	
9k	30k	3k	10k	PK	0.05ms	10dB	OFF	60dB	

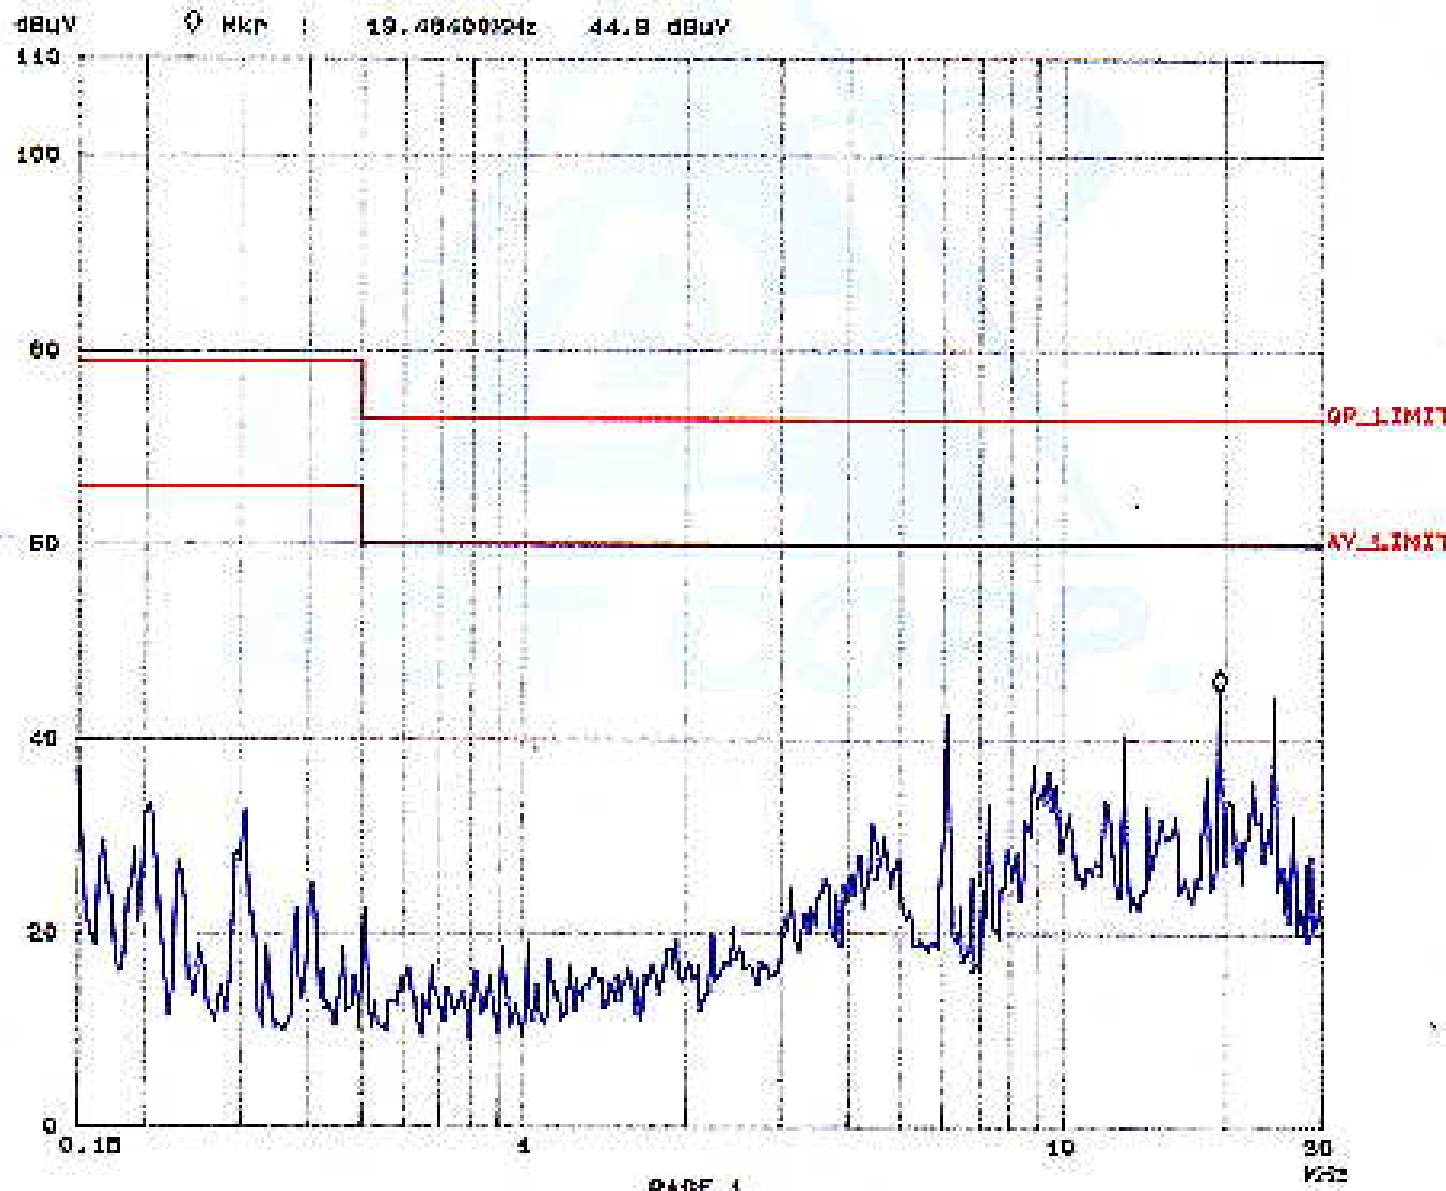





## TEST DATA OF CONDUCTED EMISSION (B)

EUT: CPU BOARD

MODEL: PCM-6890

6 dB Bandwidth: 10 kHz

MODE: 2

PHASE: NEUTRAL (N)

Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
		[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.151	0.1	37.6	-	37.7	-	79.0	66.0	-41.3	-
0.306	0.2	29.9	-	30.1	-	79.0	66.0	-48.9	-
4.440	0.4	28.9	-	29.3	-	73.0	60.0	-43.7	-
6.086	0.4	43.0	-	43.4	-	73.0	60.0	-29.6	-
13.006	0.6	42.9	-	43.5	-	73.0	60.0	-29.5	-
19.488	0.7	44.0	-	44.7	-	73.0	60.0	-28.3	-

- Remarks:
1. "\*\*\*": Undetectable
  2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": The Quasi-peak emission level also meets average limit and measurement with the average detector is unnecessary.
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.


EN55022 CLASS A

EUT: PCN-6880  
 Op Cond: 1024X768 256 COLOR  
 Operator: JACKIEY  
 Test Spec: LISN : N  
 Comment: 230V AC/50Hz  
 MODE 2: GELRACH 400MHz (80.0MHz)

Report No. CE 890566a  
 Page (4-1)  
 Tested by Jackiey Cheng

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings						
Start	Stop	Step	IF BW	Detector	K-Time	Atten	Presap	QpRge	
150K	450K	3K	10K	PK	0.05ms	10dB LN	OFF	80dB	
450K	9K	3K	10K	PK	0.05ms	10dB LN	OFF	80dB	
9K	30K	3K	10K	PK	0.05ms	10dB LN	OFF	80dB	

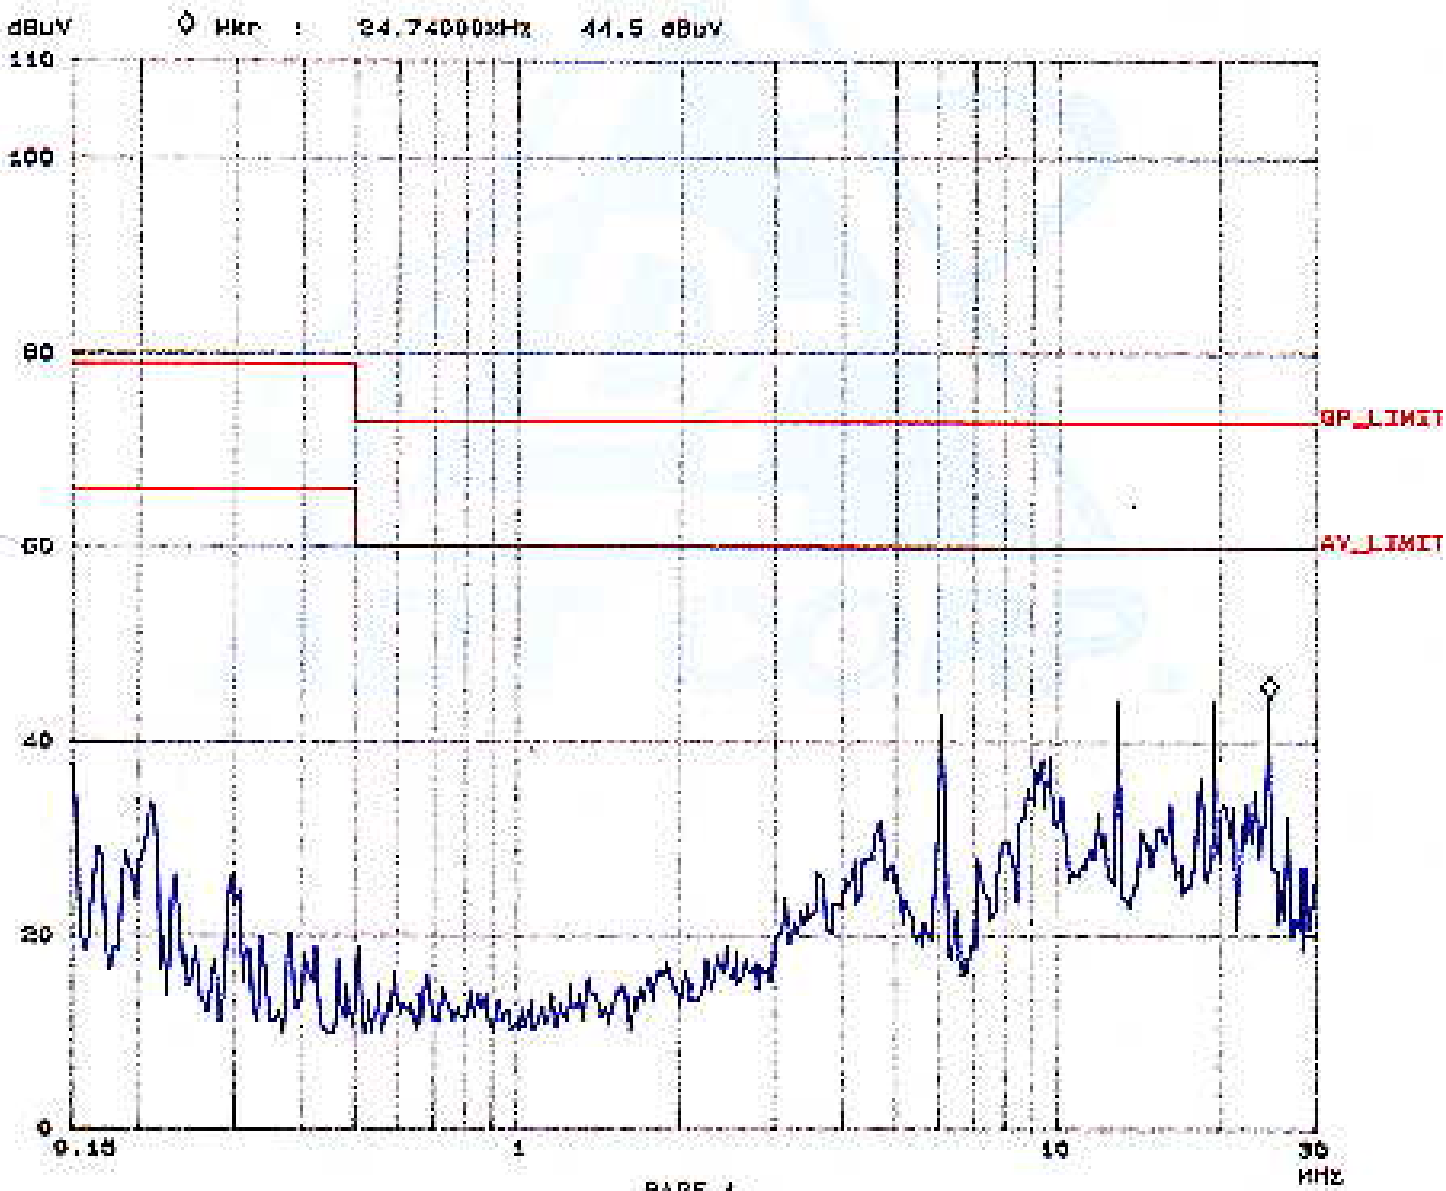



#### 4.5 TEST DATA OF RADIATED EMISSION (A)

EUT: CPU BOARD

MODEL: PCM-5896

ANT. POLARITY: Horizontal

MODE: 1

DETECTOR FUNCTION: Quasi-peak

6 dB BANDWIDTH: 120 kHz

FREQUENCY RANGE: 30-1000 MHz

MEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
66.83	7.4	8.2	15.6	40.0	-24.4	362	331
84.48	10.0	19.3	29.3	40.0	-10.7	363	0
100.24	13.1	18.8	31.9	40.0	-8.1	400	42
110.48	13.9	11.6	25.5	40.0	-14.5	400	12
125.02	14.4	16.5	30.9	40.0	-9.1	400	0
133.64	14.1	11.8	25.9	40.0	-14.1	400	12
150.00	12.3	14.2	26.5	40.0	-13.5	400	83
167.05	10.8	19.3	30.1	40.0	-9.9	400	12
192.01	11.0	15.3	26.3	40.0	-13.7	400	0
200.45	11.1	15.5	26.6	40.0	-13.4	400	12
225.71	13.6	12.2	25.8	40.0	-14.2	400	87
233.83	14.3	15.5	29.8	47.0	-17.2	400	274
250.00	15.9	17.4	33.3	47.0	-13.7	400	111
300.64	16.2	22.0	38.2	47.0	-8.8	358	37
349.99	18.8	20.2	39.0	47.0	-8.0	326	283
400.87	21.8	13.9	35.7	47.0	-11.3	303	51
450.00	22.4	13.0	35.4	47.0	-11.6	244	54
501.14	23.4	16.3	39.7	47.0	-7.3	163	129

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
  2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level - Limit value



## TEST DATA OF RADIATED EMISSION (A)

EUT: CPU BOARD

MODEL: PCM-5896

ANT. POLARITY: Vertical

MODE: 1

DETECTOR FUNCTION: Quasi-peak

6 dB BANDWIDTH: 120 kHz

FREQUENCY RANGE: 30-1000 MHz

MEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
66.81	7.5	24.0	31.5	40.0	-8.5	207	278
84.48	9.0	24.3	33.3	40.0	-6.7	159	170
125.00	12.7	18.6	31.3	40.0	-8.7	100	12
133.62	13.2	14.2	27.4	40.0	-12.6	100	0
149.99	13.5	18.5	32.0	40.0	-8.0	100	12
192.00	11.6	16.4	28.0	40.0	-12.0	100	0
200.44	12.2	19.2	31.4	40.0	-8.6	100	326
233.84	13.2	14.7	27.9	47.0	-19.1	100	69
250.13	13.8	18.7	32.5	47.0	-14.5	100	213
350.00	19.2	22.0	41.2	47.0	-5.8	100	6
400.89	21.7	10.9	32.6	47.0	-14.4	382	12
601.31	25.5	10.0	35.5	47.0	-11.5	400	3

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
  2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level - Limit value



#### 4.6 TEST DATA OF RADIATED EMISSION (B)

EUT: CPU BOARD

MODEL: PCM-6890

ANT. POLARITY: Horizontal

MODE: 2

DETECTOR FUNCTION: Quasi-peak

6 dB BANDWIDTH: 120 kHz

FREQUENCY RANGE: 30-1000 MHz

MEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
66.81	7.4	17.4	24.8	40.0	-15.2	400	75
125.00	14.4	13.3	27.7	40.0	-12.3	400	0
133.64	14.1	9.2	23.3	40.0	-16.7	400	12
167.04	10.8	22.0	32.8	40.0	-7.2	400	157
168.02	10.8	15.9	26.7	40.0	-13.3	400	176
192.02	11.0	16.2	27.2	40.0	-12.8	400	133
200.02	11.1	22.0	33.1	40.0	-6.9	400	12
229.11	13.9	19.1	33.0	40.0	-7.0	400	0
233.85	14.3	24.4	38.7	47.0	-8.3	400	228
250.01	15.9	27.0	42.9	47.0	-4.1	400	259
267.25	17.0	13.0	30.0	47.0	-17.0	400	303
300.65	16.2	13.8	30.0	47.0	-17.0	400	0
400.88	21.8	13.0	34.8	47.0	-12.2	151	316
501.07	23.4	13.0	36.4	47.0	-10.6	158	323
600.01	25.1	5.1	30.2	47.0	-16.8	310	184

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
  2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level - Limit value



## TEST DATA OF RADIATED EMISSION (B)

EUT: CPU BOARD

MODEL: PCM-6890

ANT. POLARITY: Vertical

MODE: 2

DETECTOR FUNCTION: Quasi-peak

6 dB BANDWIDTH: 120 kHz

FREQUENCY RANGE: 30-1000 MHz

MEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
66.82	7.5	18.3	25.8	40.0	-14.2	142	291
125.01	12.7	15.5	28.2	40.0	-11.8	100	291
133.63	13.2	11.7	24.9	40.0	-15.1	100	2
200.01	12.2	21.1	33.3	40.0	-6.7	100	194
200.46	12.2	20.5	32.7	40.0	-7.3	100	194
229.11	13.1	19.1	32.2	40.0	-7.8	100	202
233.85	13.2	22.6	35.8	47.0	-11.2	100	162
250.01	13.8	27.3	41.1	47.0	-5.9	100	34
300.67	16.6	14.4	31.0	47.0	-16.0	100	12
350.00	19.2	23.8	43.0	47.0	-4.0	100	212
450.01	22.6	10.6	33.2	47.0	-13.8	161	3
599.96	25.5	5.0	30.5	47.0	-16.5	242	93

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
  2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level - Limit value



## 5. TEST RESULTS (IMMUNITY)

### 5.1 GENERAL DESCRIPTION

Generic Standard	:	EN 50082-2: 1995
Basic Standard and Performance Criteria	:	EN 61000-4-2 (Electrostatic Discharge, ESD, 8kV air discharge, 4kV Contact discharge, Performance Criterion B)
		EN 61000-4-3 (Radio-Frequency Electromagnetic Field Susceptibility Test, RS, 80-1000 MHz, 10V/m, 80% AM (1kHz), Performance Criterion A)
		EN 61000-4-4 (Electrical Fast Transient/Burst, EFT, Power line: 2kV, Signal line: 1kV, Performance Criterion B)
		EN 61000-4-6 (Conducted Radio Frequency Disturbances Test, CS, 0.15-80 MHz, 10V/m, 80% AM, 1kHz, Performance Criterion A)
		EN 61000-4-8 (Power Frequency Magnetic Field Test, 50 Hz, 30A/m, Performance Criterion A)
		ENV 50204 (Radio-Frequency Electromagnetic Field, Pulse modulated, 900+/-5 MHz, 10V/m, 50 % duty cycle, Rep. Frequency 200 Hz, Performance Criterion A)
Input Voltage	:	230 Vac, 50 Hz (to power of Industrial PC)
Temperature	:	25 °C
Humidity	:	57 %
Atmospheric Pressure	:	996 mbar

### 5.2 PERFORMANCE CRITERIA DESCRIPTION

- Criterion A - The apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended.
- Criterion B - The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended.
- Criterion C - Temporary loss of function is allowed, provided the function is self recoverable or can be restored by the operation of the controls.

### 5.3 EUT OPERATION CONDITION

Industrial PC runs a test program to access FDD/HDD/MODEM/PRINTER sequentially and show the result on monitor screen.



## 5.4 TEST RESULT OF ELECTROSTATIC DISCHARGE (ESD)

Basic Standard	:	EN 61000-4-2
Generic Standard	:	EN 50082-2
Discharge Impedance	:	330 ohm / 150 pF
Discharge Voltage	:	Air Discharge - 8 kV (Direct)
(Direct/Indirect)	:	Contact Discharge - 4 kV (Direct/Indirect)
Polarity	:	Positive/Negative
Number of Discharge	:	Minimum 10 times at each test point
Discharge Mode	:	Single Discharge
Discharge Period	:	1 second minimum

Test Result		Remarks
Criterion A	PASS	MODE 1
Criterion A	PASS	MODE 2

### OBSERVATION DESCRIPTION

Direct Application			Test Result	
Discharge Level (kV)	Polarity (+/-)	Test Point	Contact Discharge	Air Discharge
8	+/-	1 ~ 9	NA	Note 1
4	+/-	5 ~ 9	Note 1	NA

#### Description of test point: (Please refer to ESD test photo)

- |                     |                 |                  |
|---------------------|-----------------|------------------|
| 1. Switch           | 2. Push button  | 3. Floppy        |
| 4. Junction of case | 5. Serial ports | 6. Parallel port |
| 7. USB ports        | 8. VGA port     | 9. Metal case    |

Indirect Application			Test Result	
Discharge Level (kV)	Polarity (+/-)	Test Point	Horizontal Coupling	Vertical Coupling
4	+/-	1 ~ 4	Note 1	Note 1

#### Description of test point:

- |               |               |
|---------------|---------------|
| 1. Front side | 2. Right side |
| 3. Left side  | 4. Rear side  |

#### Description of test result:

Note 1: There was no change compared with initial operation during the test.





## 5.5 TEST RESULT OF RADIATED RADIO FREQUENCY DISTURBANCES (RS)

Basic Standard : EN 61000-4-3  
Generic Standard : EN 50082-2  
Frequency range : 80 MHz - 1000 MHz  
Field strength : 10 V/m  
Modulation : 1kHz Sine Wave, 80%, AM Modulation  
Frequency step : 1 % of fundamental  
Polarity of Antenna : Horizontal and Vertical  
Test distance : 3 m

Test Result		Remarks
Criterion A	PASS	MODE 1
Criterion A	PASS	MODE 2

Note: Four sides of EUT are verified separately.

### OBSERVATION DESCRIPTION

There is no change compared with initial operation during the test.



## 5.6 TEST RESULT OF ELECTRICAL FAST TRANSIENT/BURST (EFT/BURST)

Basic Standard : EN61000-4-4  
Generic Standard : EN 50082-2  
Test Voltage : Power Line - 2 kV (to power of Industrial PC)  
Signal/Control Line – 1kV  
Polarity : Positive/Negative  
Impulse Frequency : 5 kHz  
Tr / Tn : 5/50 ns  
Burst Duration : 15 ms  
Burst Period : 300 ms  
Test Duration : Not less than 1 min.

Test Result		Remarks
Criterion B	PASS	MODE 1
Criterion B	PASS	MODE 2

### OBSERVATION DESCRIPTION

Test Point	Polarity	Test Level (kV)	Result
L1	+/-	2	Note 1
L2	+/-	2	Note 1
GND	+/-	2	Note 1
Signal / Control Line	+/-	1	Note 1

#### Description of test result:

Note 1: The transmission of data was stopped during the test, but self-recoverable after the test.



## 5.7 TEST RESULT OF CONDUCTED RADIO FREQUENCY DISTURBANCES (CS)

Basic Standard : EN 61000-4-6  
Generic Standard : EN 50082-2  
Frequency range : 0.15 MHz - 80 MHz  
Field strength : 10 V/m  
Modulation : 1kHz Sine Wave, 80%, AM Modulation  
Frequency step : 1 % of fundamental  
Coupled cable : Power Mains, Unshielded  
Coupling device : CDN-M3 (3 wires), CLAMP

Test Result		Remarks
Criterion A	PASS	MODE 1
Criterion A	PASS	MODE 2

### OBSERVATION DESCRIPTION

There is no change compared with initial operation during the test.



## 5.8 TEST RESULT OF POWER FREQUENCY MAGNETIC FIELD

Basic Standard : EN 61000-4-8  
Generic Standard : EN 50082-2  
Frequency range : 50 Hz  
Field strength : 30 A/m  
Observation Time : 1 minute  
Inductance coil : Rectangular type, 1mx1m

Test Result		Remarks
Criterion A	PASS	MODE 1
Criterion A	PASS	MODE 2

### OBSERVATION DESCRIPTION

There was no change compared with initial operation during the test.



## 5.9 TEST RESULT OF RADIO-FREQUENCY ELECTROMAGNETIC FIELD, PULSE MODULATED

Basic Standard : ENV 50204  
Generic Standard : EN 50082-2  
Frequency range : 900 +/- 5 MHz  
Field strength : 10 V/m  
Modulation : 200Hz, Square Wave, 50% Duty Cycle  
Dwell Time : 30 second  
Polarity of Antenna : Horizontal and Vertical  
Test distance : 3 m

Test Result		Remarks
Criterion A	PASS	MODE 1
Criterion A	PASS	MODE 2

Note: Four sides of EUT are verified separately.

### OBSERVATION DESCRIPTION

There is no change compared with initial operation during the test.





## 6. PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST






## RADIATED EMISSION TEST

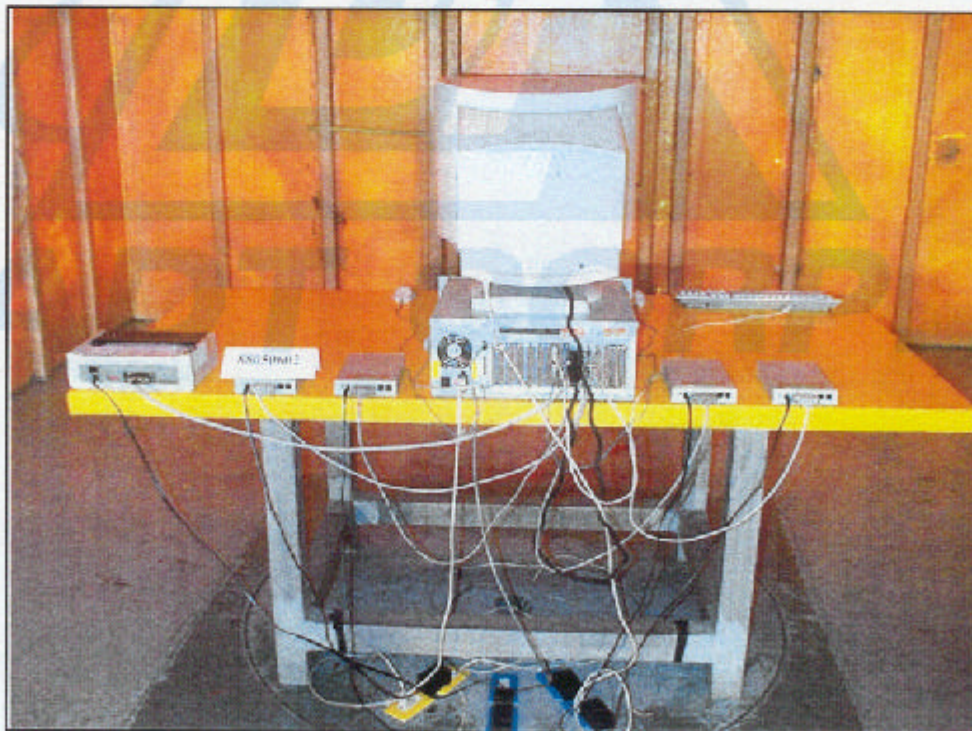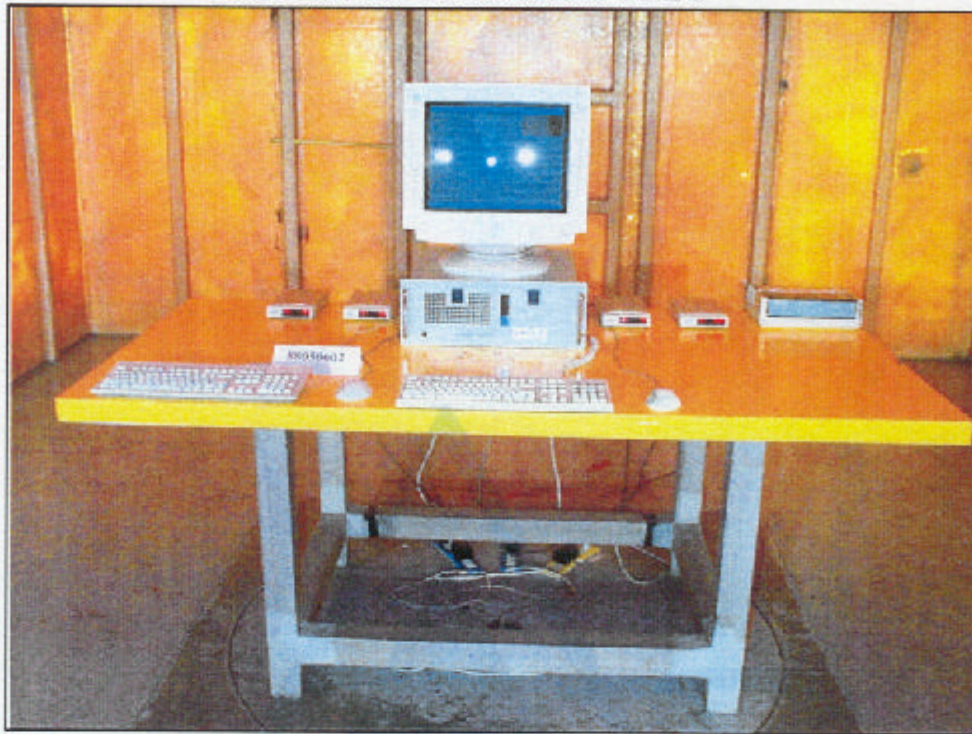




## ESD TEST

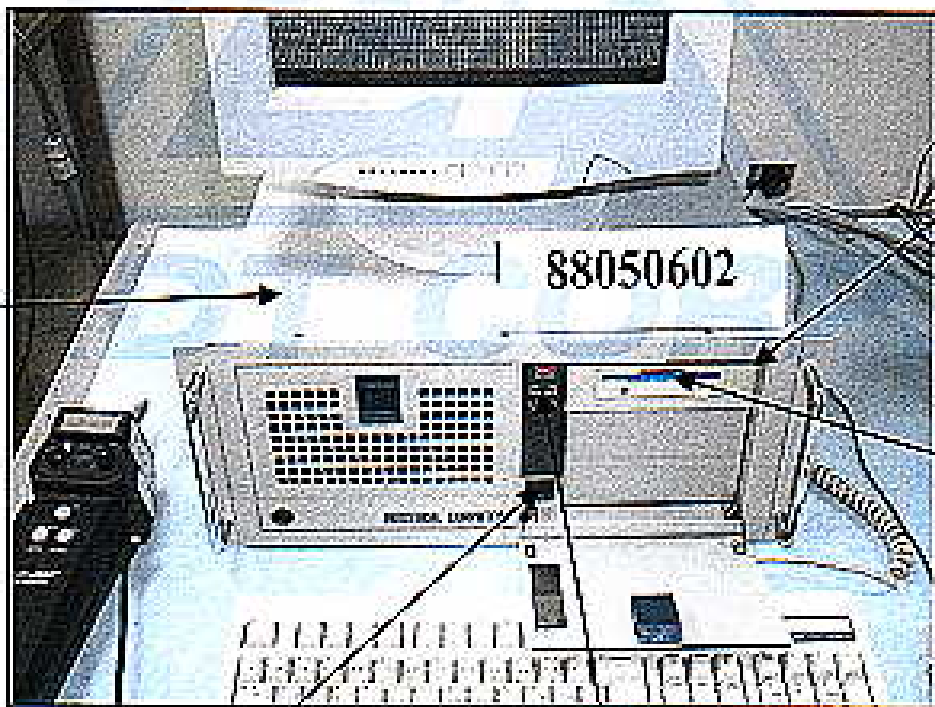



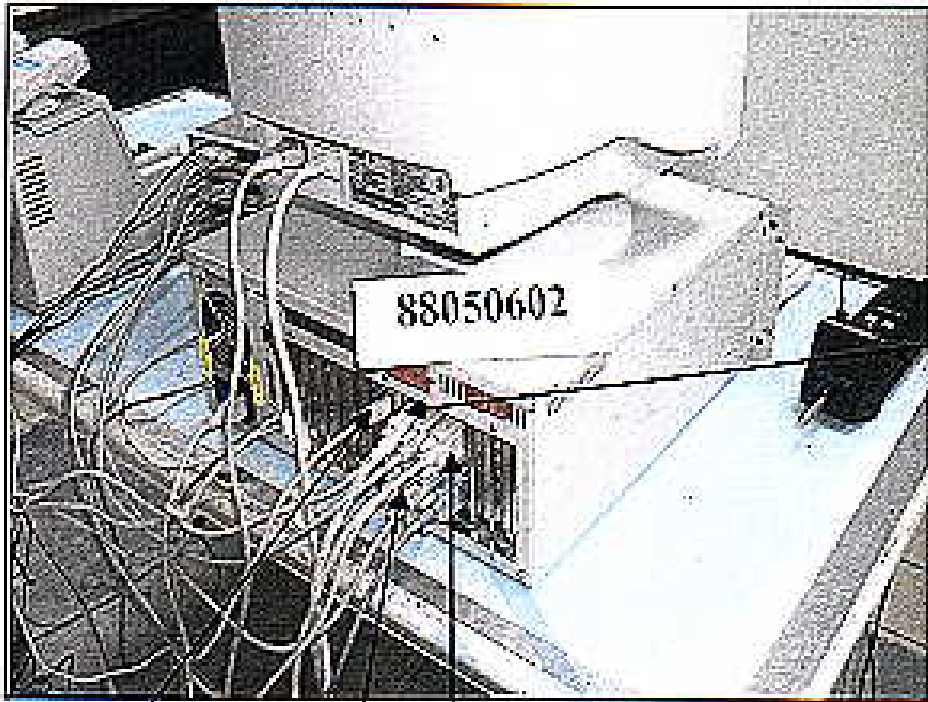


7

6


5

8

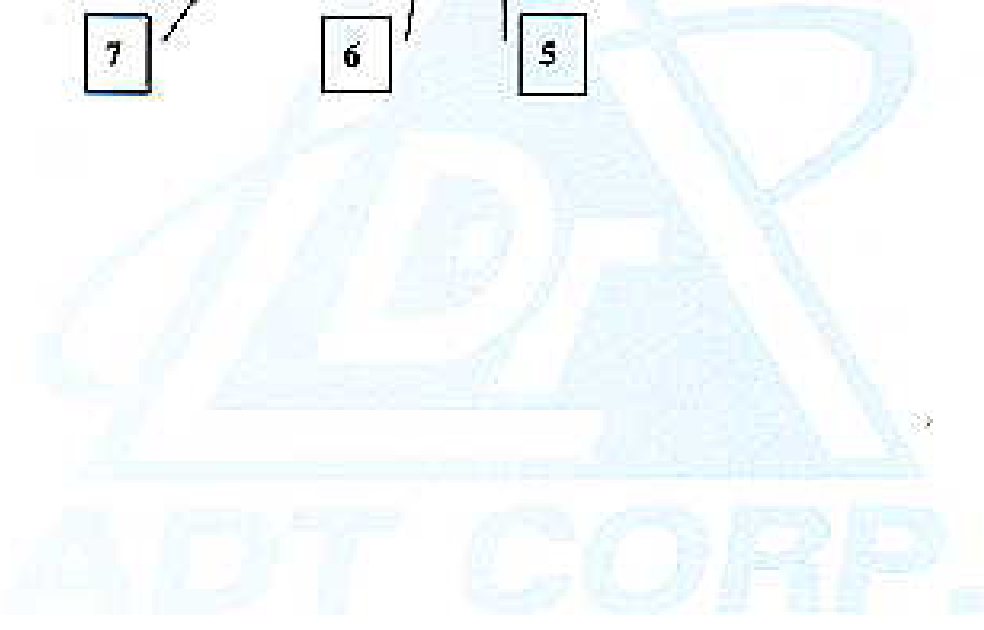



## RS TEST (AM MODULATION AND PULSE MODULATION)

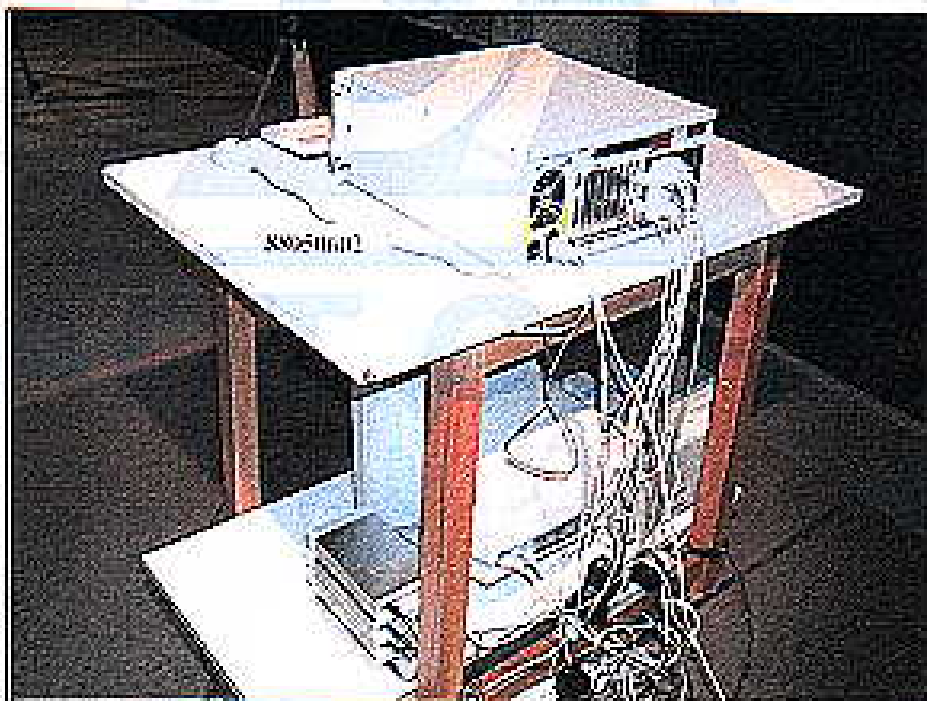



### EFT TEST




### EFT CLAMP TEST





### CONDUCTED SUSCEPTIBILITY TEST

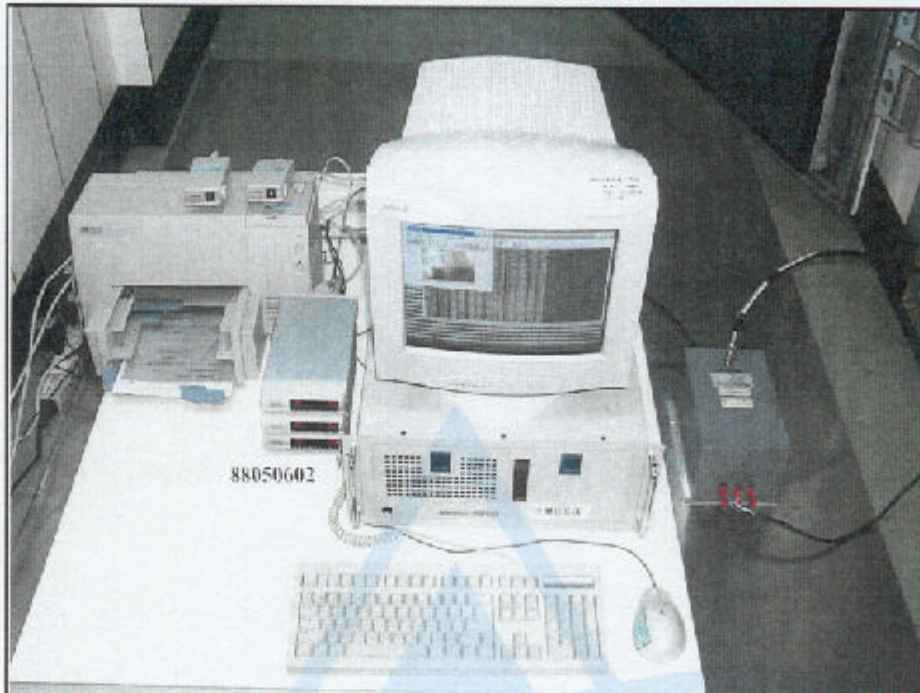


### CONDUCTED SUSCEPTIBILITY CLAMP TEST





## MAGNETIC TEST

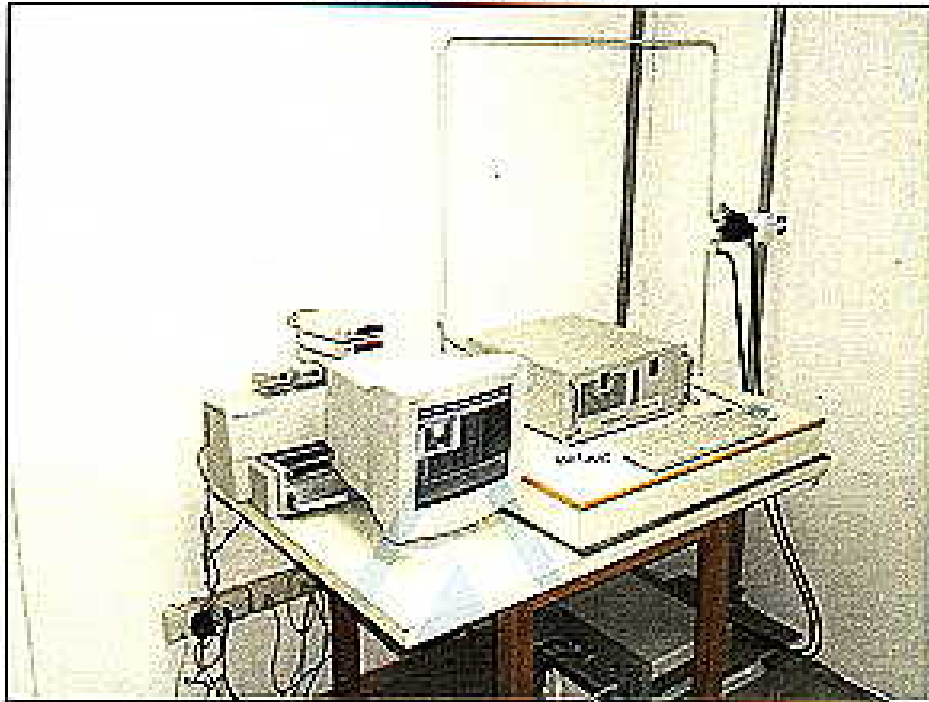



## 7. APPENDIX - INFORMATION OF THE TESTING LABORATORY

### Information of the testing laboratory

We, ADT Corp., are founded in 1988, to provide our best service in EMC and Safety consultation. Our laboratory is accredited by the following approval agencies according to ISO/IEC Guide 25 or EN 45001:

- |               |                                      |
|---------------|--------------------------------------|
| ● USA         | FCC, UL, NVLAP                       |
| ● Germany     | TUV Rheinland<br>TUV Product Service |
| ● Japan       | VCCI                                 |
| ● New Zealand | RFS                                  |
| ● Norway      | NEMKO, DNV                           |
| ● U.K.        | INCHCAPE, SGS                        |
| ● R.O.C.      | BSMI                                 |

Enclosed please find some certificates of our laboratory obtained from approval agencies. If you have any comments, please feel free to contact us with the following:

**Lin Kou EMC Lab.:**  
Tel: 886-2-26092180  
Fax: 886-2-26022943

**Hsin Chu EMC Lab.:**  
Tel: 886-35-935343  
Fax: 886-35-935342

**Lin Kou Safety Lab.:**  
Tel: 886-2-26093195  
Fax: 886-2-26093184

**Design Center:**  
Tel: 886-2-26093195  
Fax: 886-2-26093184

E-mail: [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)  
<http://www.adt.com.tw>



## CONSTRUCTION PHOTOS OF EUT

